



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

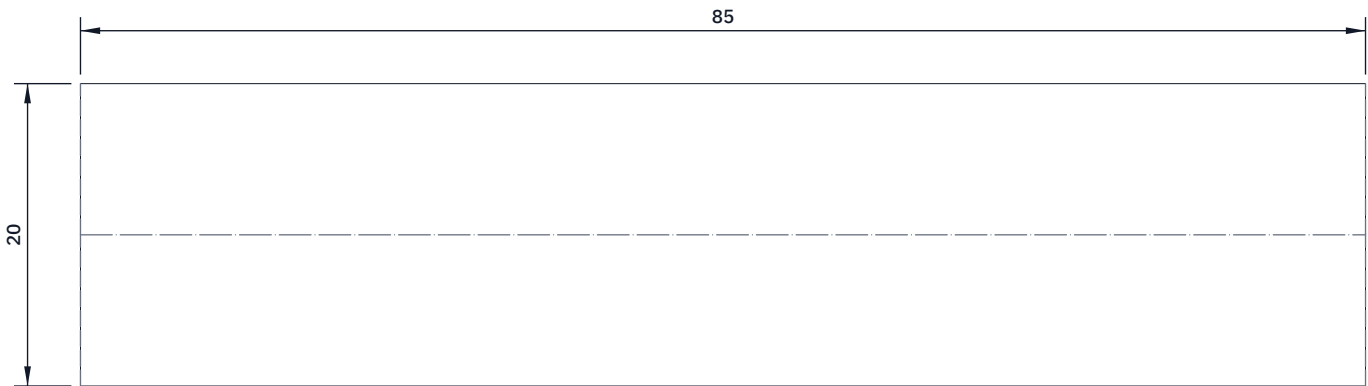


TOP VIEW

Scale 2:1; looking down (along -Z)

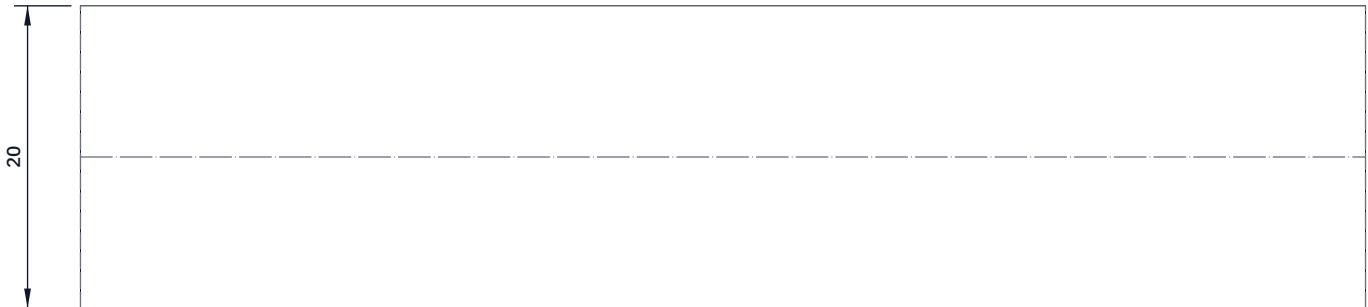


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

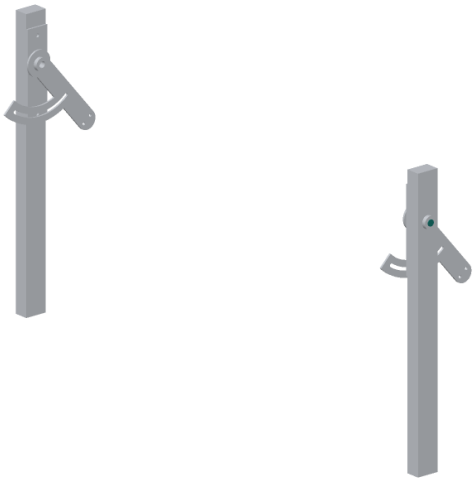

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Cut 85 mm of 20 mm bright steel round bar.
File a 1 mm chamfer on both ends so it starts into the holes.
File a small flat 10 mm long at each collar position (12 mm and 79 mm from the outer end) for the collar set screws.
Fit, from outside to inside: outer collar, upright, axle plate, PTFE thrust washer, yoke plate, inner collar.
The axle does not turn: the yoke plate turns on it, greased.
Check: it slides through the drilled upright and plate by hand.

SUNCLAVE

github.com/BoujeeEnjinia1701/sunclave

SunClave axle (make 2): making sketch

DRAWING NO. SCL-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Bright steel round bar 20 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand