



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

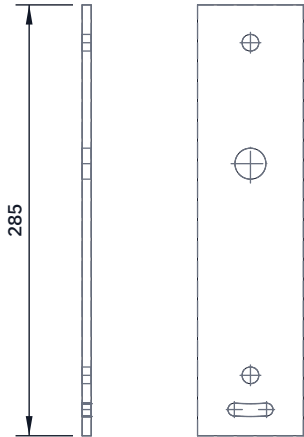


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

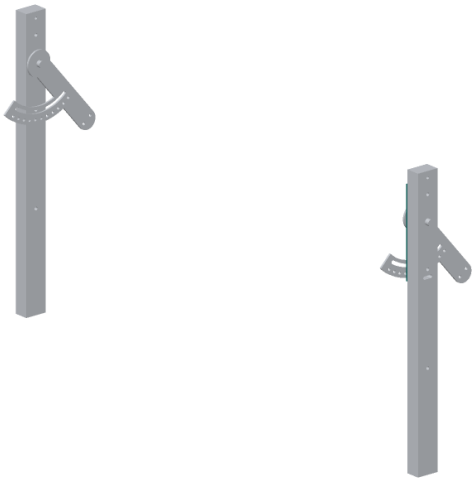

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Cut 285 mm of 70 x 6 mm steel flat bar; deburr.

Three holes on the centre line, measured from the top end:

bolt 11 mm at 25; axle 20.5 mm at 105; lock stud 11 mm at 245.

Drop pin slot: 8.5 mm wide on a 163 mm radius from the axle hole, centred 268 from the top, 7.5 degrees long (21 mm between the end centres): drill both ends, saw and file between.

Drill the axle hole in steps (6, 12, 18, 20.5 mm) on a drill press, the plate clamped flat.

Paint or galvanise; leave the face around the axle bare and greased, and the face around the stud bare for the lock.

Fit: flat on the inner face of the upright, holes on the upright holes; the M10 plate bolt at the top, the stud at the bottom.

Check: a 20 mm bar passes through plate and upright together.

SUNCLAVE

github.com/BoujeeEnjinia1701/sunclave

SunClave axle plate (make 2): making sketch

DRAWING NO. SCL - DWG - 105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel flat bar 70 x 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	