




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

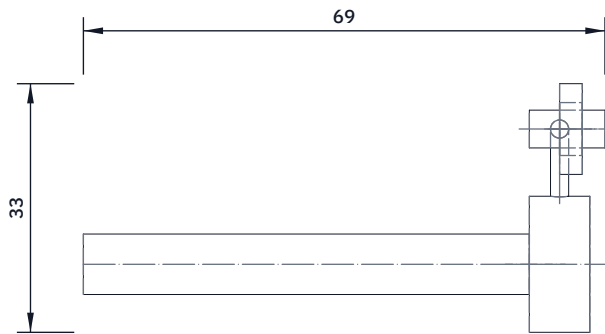


TOP VIEW
Scale 1:1; looking down (along -Z)

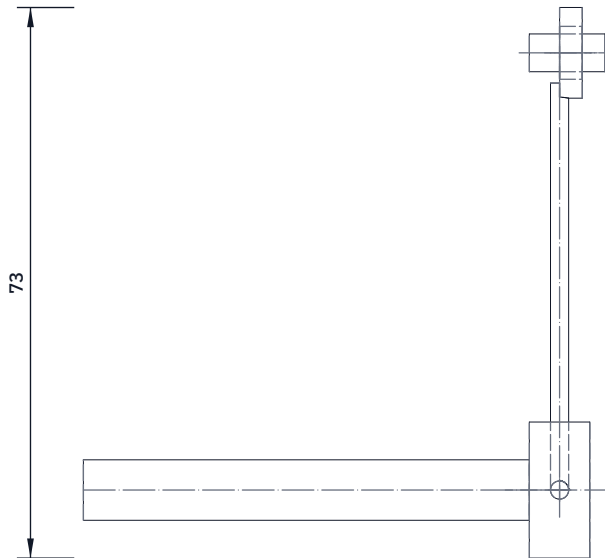

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

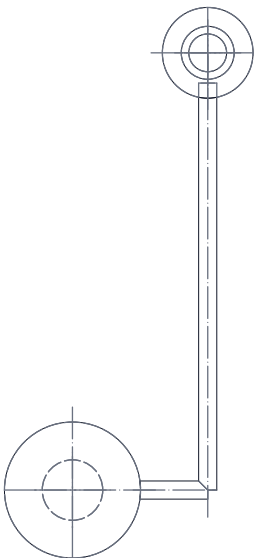

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

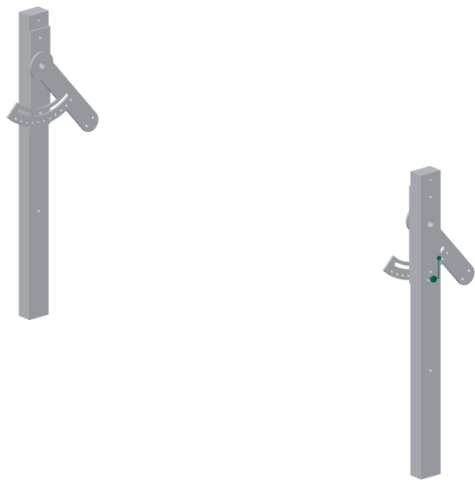

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Cut 59 mm of 8 mm bright steel bar; chamfer one end 1 mm so it finds the hole.

Head: a steel washer 18 mm across, 8 mm thick (or two washers), pinned or glued on the other end; or buy a ready-made 8 mm locking pin about 67 mm long.

Lanyard: 300 mm of stainless wire rope with crimped loops, from the head to an eye screw on the upright's outer face.

Fit: push it in from outside the stand, through the slot in the upright, the slot in the axle plate and the fan hole that shows in the slot; its tip ends flush with the fan's inner face. Pull it out to re-aim the dish.

Check: it slides in and out by hand at every aim.

SUNCLAVE			github.com/BoujeeEnjinia1701/sunclave		
SunClave drop pin and lanyard (make 2): making sketch					
DRAWING NO. SCL - DWG - 119			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Bright steel round bar 8 mm, steel ring, stainless wire					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					
Generated from cad/src; do not edit by hand					