



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

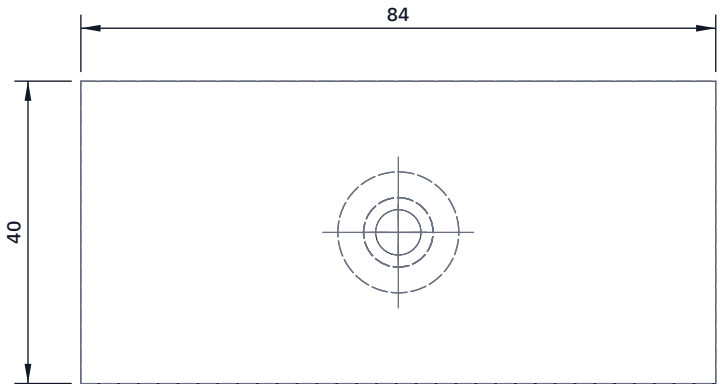


TOP VIEW

Scale 1:1; looking down (along -Z)

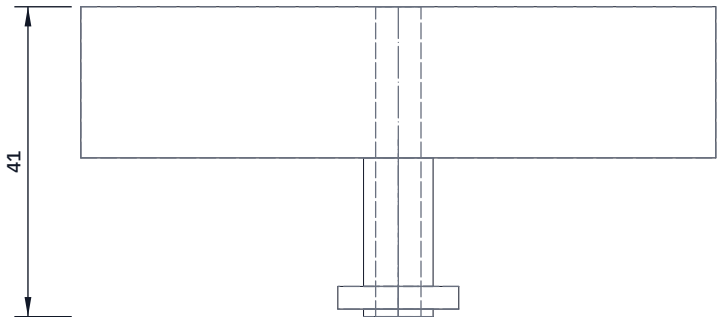


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

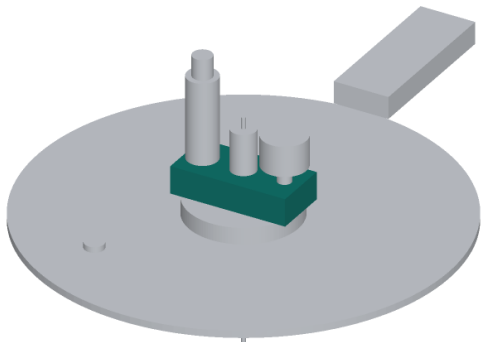

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Have a machine shop make it: 84 x 40 x 20 mm stainless block with a threaded spigot underneath that fits the canner's own vent-pipe hole (10 mm here: measure the canner) and a nut and high-temperature gasket to clamp it to the lid. Bore 6 mm up through the spigot to the gland port on top. Two side ports on top, 30 mm each side of the centre: the canner's own vent pipe (its thread) and 1/4 in NPT for the transducer; drill a 4 mm passage from the bore to each. Gland port 1/8 in NPT on the centre for the probe gland. The lid itself is not drilled; the overpressure plug stays. Check: with the probe in, a 3 mm drill passes the vent passage, and a 2.5 mm wire passes beside the probe.

SUNCLAVE

github.com/BoujeeEnjinia1701/sunclave

SunClave vent-stem adapter plate: making sketch

DRAWING NO. SCL-DWG-120			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Stainless steel bar 40 x 20 mm, threaded spigot and nut					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand