


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

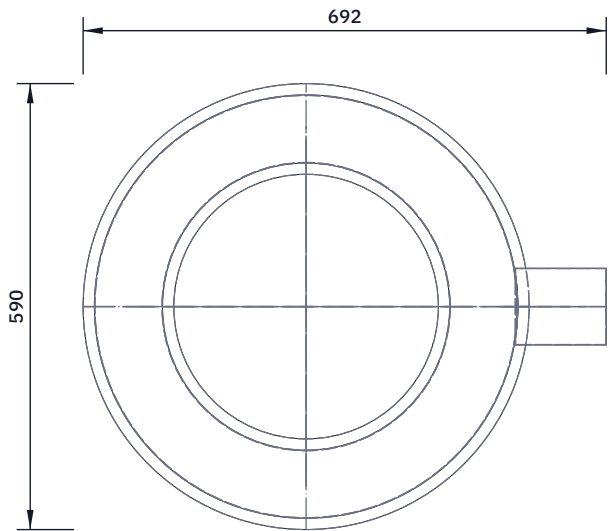


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

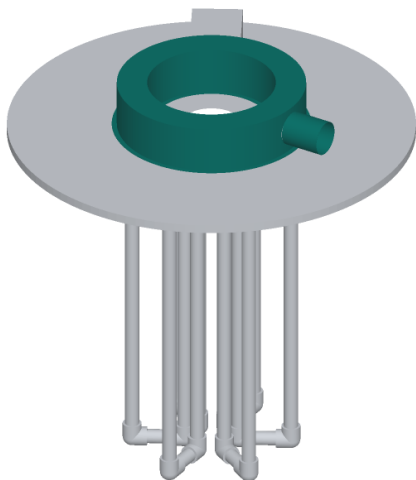

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

An annular box 140 mm high, 380 mm inside and 560 mm outside.
Walls: strips 170 mm wide (140 high plus a 15 mm flange and a 15 mm tab edge), 1,780 mm long for the outer wall and 1,220 mm for the inner, rolled round and riveted at a 25 mm lap.
Top: an annulus 560 mm outside, 380 mm inside, from flashing.
Snip the tab edges every 40 mm, fold them over the top and rivet.
Snip the foot edges and fold them out (outer wall) and in (inner wall) as 15 mm flanges.
Collar: cut a 4 in hole in the outer wall at 0 degrees, centred 70 mm up, and rivet in the crimped start collar (19 mm of wall each side).
Fit: flanges riveted to the cap; the six inlet legs end 10 mm below the top inside it. Seal the flanges with foil tape.

THERMABRICK

github.com/BoujeeEnjinia1701/thermabrick

ThermaBrick inlet plenum: making sketch

DRAWING NO. TBK-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Galvanized steel flashing 0.6 mm; 4 in crimped start collar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand