




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

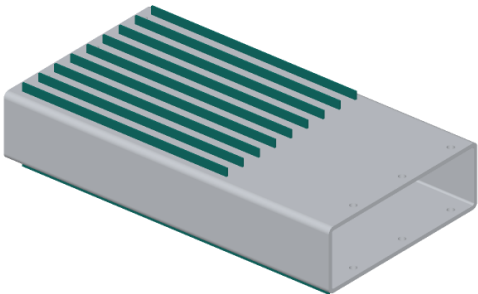

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut nine bottom fins 264 mm and nine top fins 176 mm long

(two 3.66 m bars also give the two 40 mm indicator guards).

Debur; keep the long edges straight (roll them on a flat plate).

Each fin stands on edge, 6.35 mm tall, on 16.55 mm centres; the outer fins are 10 mm in from the side faces.

Bottom fins start 8 mm in from each tube end.

Top fins start 8 mm in from the key end and stop 96 mm short of the handle end, leaving the label band clear.

Bond with the 120 degree C epoxy: a thin bead under the edge and

a fillet down each side. Hold them upright in a slotted comb

(a wooden strip sawn at the fin pitch) while the epoxy cures.

Check: every fin upright, none touching a screw hole.

THERMACART

github.com/BoujeeEnjinia1701/thermacart

ThermaCart fins (make 9 long and 9 short): making sketch

DRAWING NO. TCT-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 6063 flat bar 6.35 x 1.59 mm (1/4 x 1/16 in)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand