



CONCEPT, NOT FOR FABRICATION

TremorTrace · github.com/BoujeeEnjinia1701/tremortrace

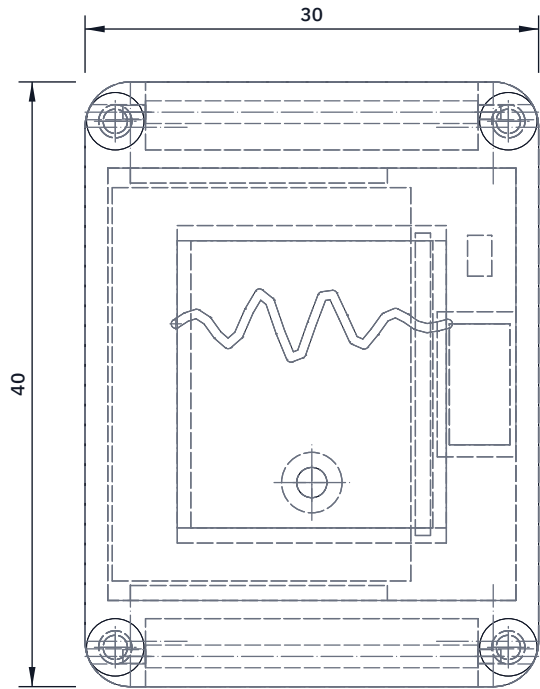


TOP VIEW

Scale 2:1; looking down (along -Z)

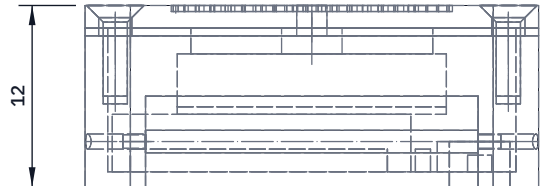

FRONT VIEW


Scale 2:1; looking at the front (along +Y)

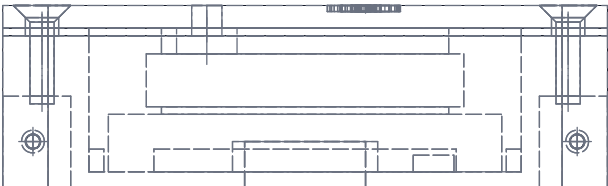

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	General arrangement for TRL 3 (TRT-CAL-001)	2026-09-25	AC
P2	Textile strap, charge at 50 mA (TRT-DDR-002)	2026-09-25	AC
P3	Design for construction (TRT-DDR-003)	2026-10-02	AC
P4	Schottky diode in the charging lead; lid mark debossed 0.4 mm	2026-10-02	AC

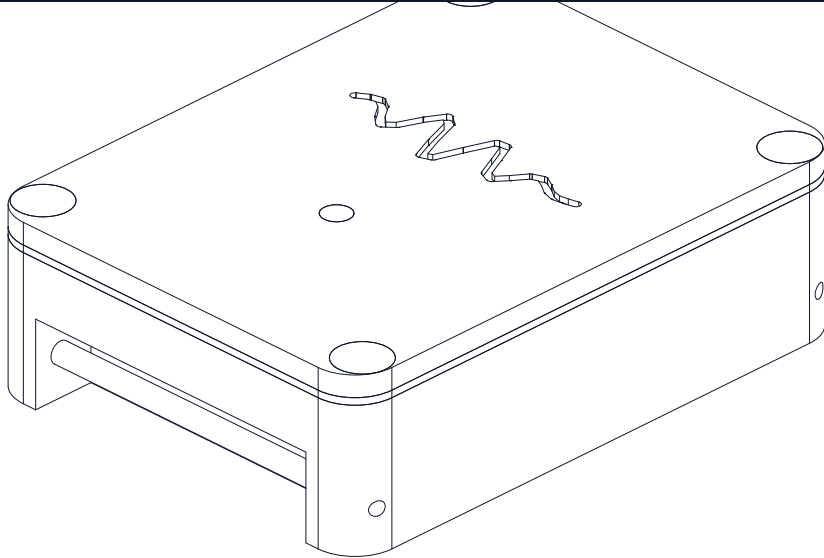

ISOMETRIC VIEW

Not to scale; strap omitted; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS (MM)

Pod envelope 40 across wrist x 30 along forearm x 12 high

Base 10.0 high, wall 1.5, floor 1.0; lid 1.5

Gasket 0.5 compressed; corner radius 3

Cavity 27.0 x 28.6 x 9.5

Lugs: 22 between horns, notch 4.5 deep x 6 high

Spring bar tip holes 1.0 dia through the horns, 2 from end, 3 up

Lid screws 4 x M2 x 6 countersunk, one per horn, 13 and 17.4 from center

Cell 19.75 x 26.02 x 3.8; module 17.8 x 21 x 3.5

Charging opening 4 x 8 in floor with glue collar; LED bore 2 dia

Diode on the floor 8.5 to one side of the opening; lid mark debossed 0.4 deep

Cell ribs 1.5 high, 0.3 clear; upper foam pad 1.7 compressed

PARTS LIST (ITEMS MATCH BOM/BOM.CSV)

- Textile strap, 22 mm (not shown)
- Enclosure lid, PETG
- Controller and IMU module (XIAO class)
- LiPo cell, 150 mAh protected
- Enclosure base, PETG
- Magnetic 2-pin charging connector

PARTS LIST, CONTINUED

- TPU gasket
 - Spring bars, 22 mm
 - Lid screws, 4 x M2 x 6 countersunk
 - Light pipe, 2 mm
 - Consumables (foam pads, epoxy)
 - Schottky diode, SOD-123, in the receptacle lead
- Charge at 50 mA. Never charge while worn.
Not a medical device.

TREMORTRACE

github.com/BoujeeEnjinia1701/tremortrace

Wrist pod general arrangement

DRAWING NO. TRT-DWG-002		REV P4	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Base and lid PETG, gasket TPU 95A; bought parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand