


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 2:1; looking down (along -Z)

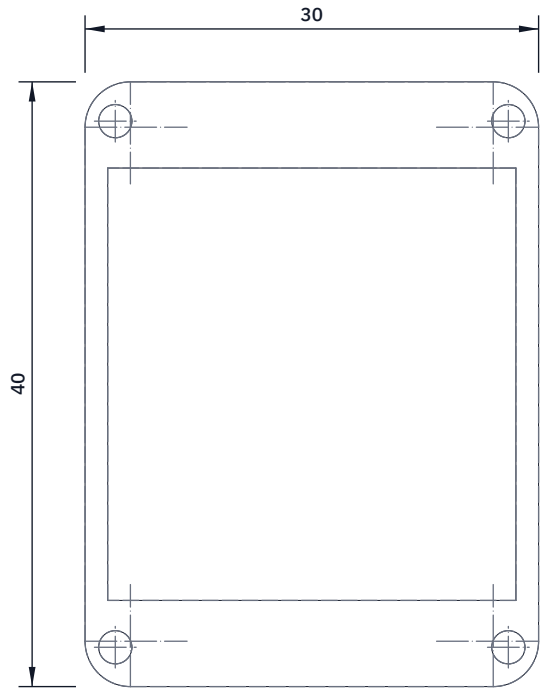


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

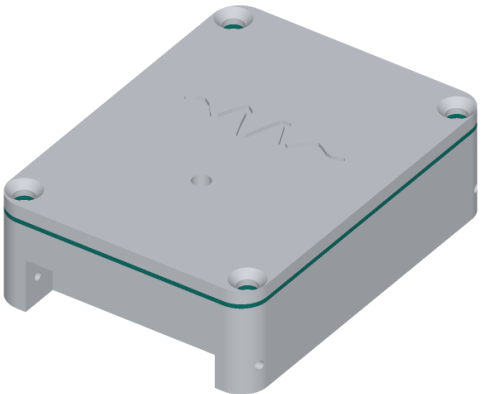

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Print flat in TPU 95A, 0.8 mm thick (four 0.2 mm layers).
- It squeezes to 0.5 mm when the lid screws are tight.
- Outline the same as the pod: 30 x 40, corners R3.
- Opening 27 x 28.6, the same as the base cavity.
- Four 2.2 mm holes at the screw positions (13 and 17.4 each side of centre) so the screws pass without tearing it.
- Fit: lies on the base rim, inside edge flush with the cavity wall.
- Check: it lies flat with no stringing across the opening;
- print a spare, since the gasket is replaced if the pod is opened.

TREMORTRACE			github.com/BoujeeEnjinia1701/tremortrace		
TremorTrace gasket: making sketch					
DRAWING NO. TRT-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES TPU 95A, 3D printed					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		