



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW
Scale 2:1; looking down (along -Z)

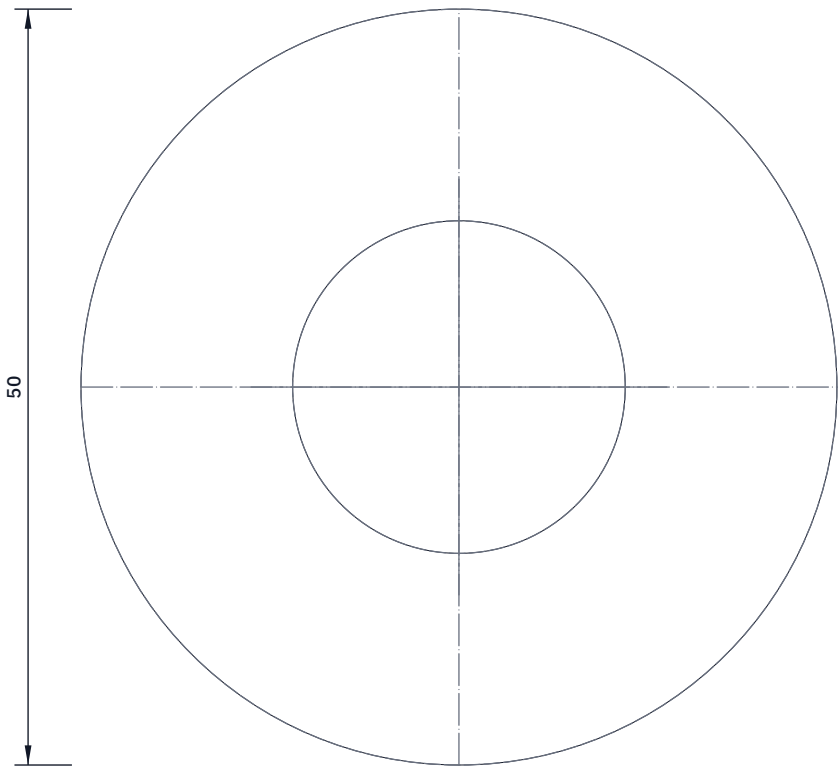

FRONT VIEW
Scale 2:1; looking at the front (along +Y)



RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

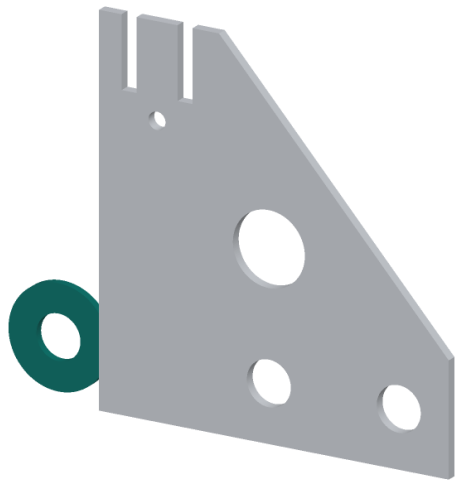

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make four. 4 mm 6082-T6 aluminium, 50 outside, 22 bore.

Cut from plate offcuts; do not use steel washers.

One ring each side of each eye, the bores in line with the 22 eye hole within 0.5 mm (use a 22 pin to line them up).

TIG weld all round the outside, 3 mm fillet, ER5356 filler; no weld in the bore. Keep 4 mm: the quick link must pass.

After welding, round the bore edges to 2 mm radius, so a carabiner bears on a smooth curve, never a sharp edge.

Finished eye: 13 thick (4 + 5 + 4).

TRUNKBELAY

github.com/BoujeeEnjinia1701/trunkbelay

TrunkBelay: eye doubler ring (make 4)

DRAWING NO. TKB-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 6082-T6 aluminium plate 4 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	