



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

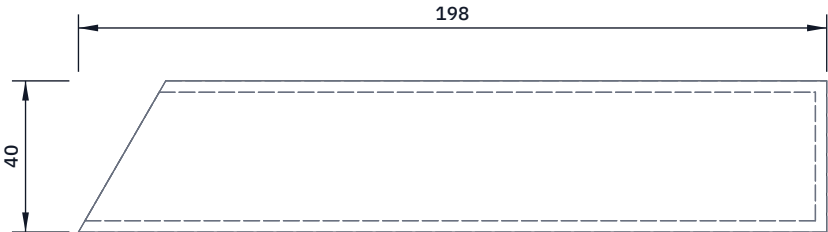


TOP VIEW

Scale 1:2; looking down (along -Z)

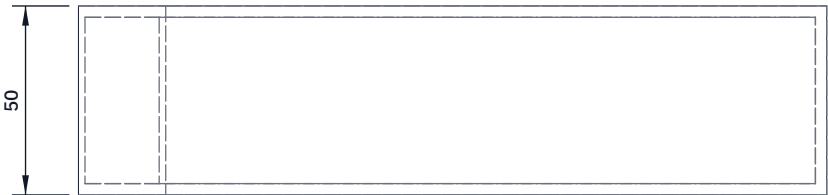


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

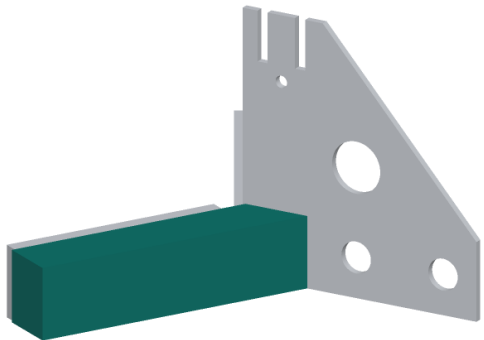

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two, one a mirror image of the other. Aluminium RHS

50 x 40 x 3, the 50 face vertical; the 40 depth runs away

from the trunk. Length 175 along the trunk-side face; the

inner end is cut at 30 deg so it lies flat on the spine.

TIG weld a 3 mm aluminium cap on the outer end (ER5356).

No vent hole: the frame is not galvanised.

Drill two 9.0 holes through the trunk-side face only, 53 and

138 from the inner end on the centre line; after welding set

M6 countersunk-head stainless rivet nuts in them, flush.

The two bars meet the spine at its foot and form a V with

120 deg between their trunk-side faces.

TRUNKBELAY

github.com/BoujeeEnjinia1701/trunkbelay

TrunkBelay: bearing bar (make 2, opposite hands)

DRAWING NO. TKB-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 6082-T6 aluminium rectangular hollow section 50 x 40 x 3 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand