BUILD PLAN SKETCH, PLAN NOT YET BUILT

TrunkBelay · github.com/BoujeeEnjinia1701/trunkbelay

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-25	AC

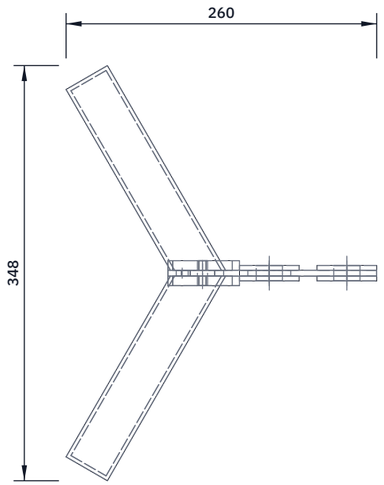

TOP VIEW

Scale 1:5; looking down (along -Z)

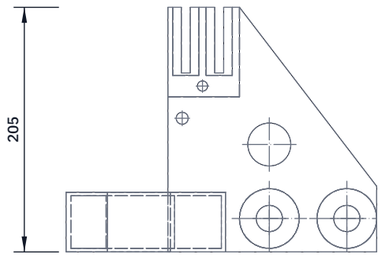

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

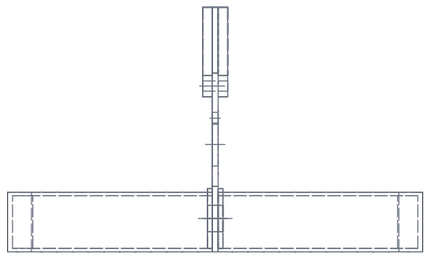

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

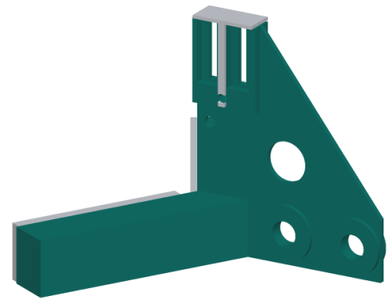

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

TIG weld the bars to the spine foot first (AC, ER5356), in a jig that holds their trunk-side faces at 120 deg, bottoms level. 5 mm fillets all round each bar end; the bar ends must not stand proud of the spine's front edge.

Then the four eye rings, then the two cheeks.

Check: the V faces meet (if extended) 8 in front of the spine front edge; both bar faces flat within 1 mm.

Clean the bar faces, slots and eyes with a stainless brush; run a 7 mm bar through both slots and the 8 pin through its hole. Inspect every weld; no repair welding of a crack.

Stamp SWL 100 kg ONE PERSON and the frame number on the spine.

TRUNKBELAY

github.com/BoujeeEnjinia1701/trunkbelay

TrunkBelay: collar frame weldment (make 1)

DRAWING NO.	REV	SHEET	SIZE
TKB-DWG-105	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

6082-T6 aluminium parts above, TIG welded (ER5356), not galvanised

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand