



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

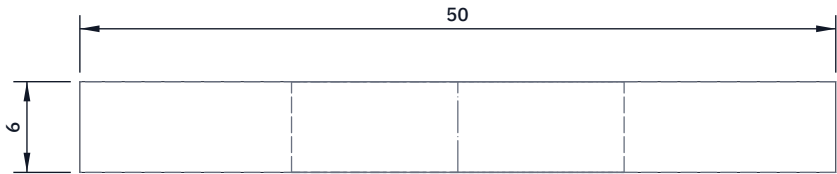

TOP VIEW

Scale 2:1; looking down (along -Z)

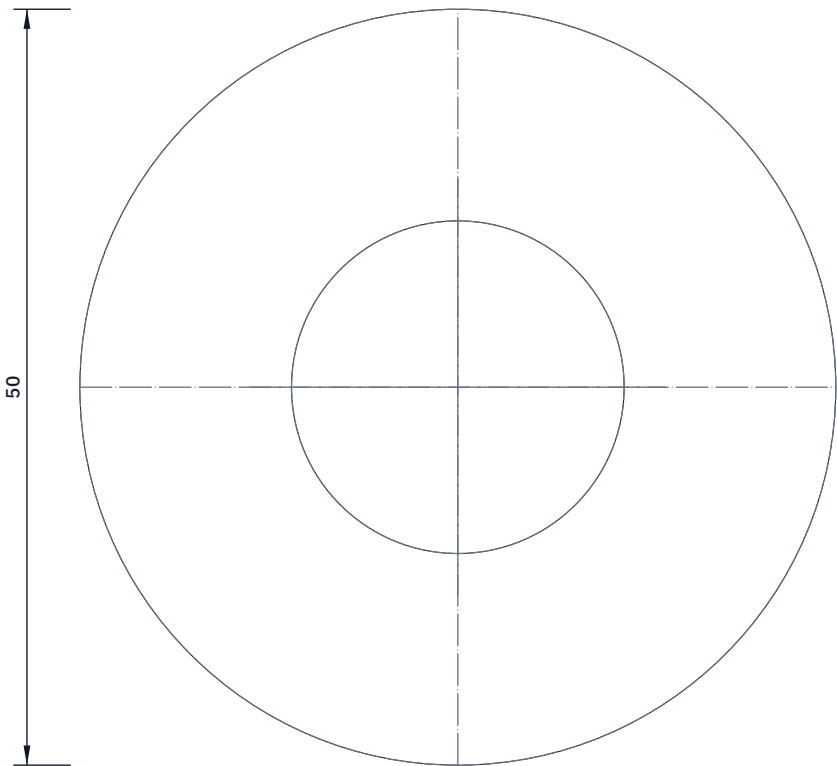


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

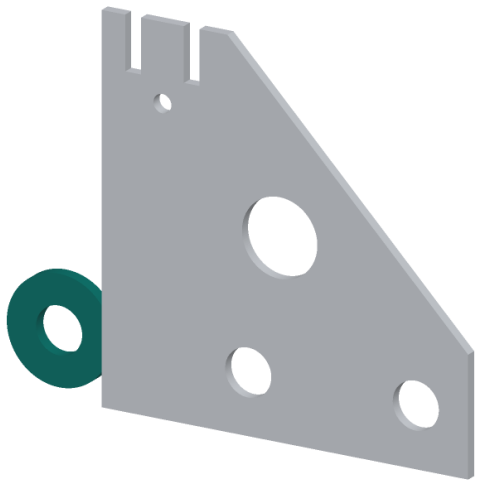

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make four. 6 mm 6082-T6, 50 outside diameter, 22 bore.

Cut from plate (waterjet or laser), or turn from round bar.

One ring each side of each eye, the bores in line with the

22 eye hole within 0.5 mm (use a 22 pin to line them up).

TIG weld all round the outside, 4 mm fillet; none in the bore.

After welding, round the bore edges to 2 mm radius, so a

carabiner bears on a smooth curve, never a sharp edge.

Finished eye: 17 thick (6 + 5 + 6).

TRUNKBELAY

github.com/BoujeeEnjinia1701/trunkbelay

TrunkBelay: eye doubler ring (make 4)

DRAWING NO. TKB-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium 6082-T6 plate 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand