




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

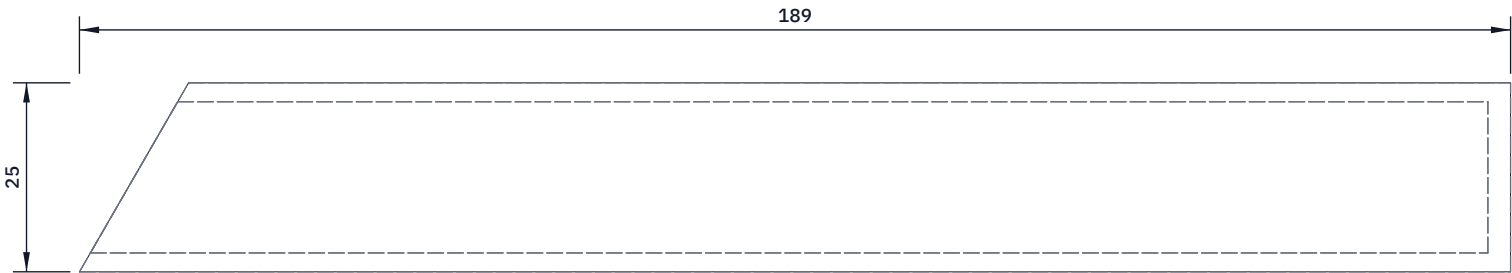


TOP VIEW
Scale 1:1; looking down (along -Z)

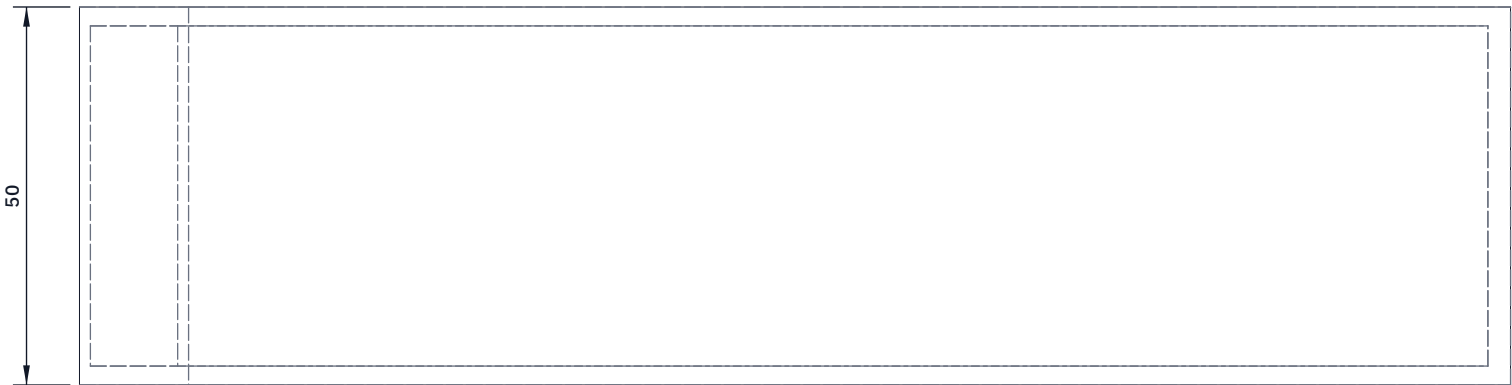

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

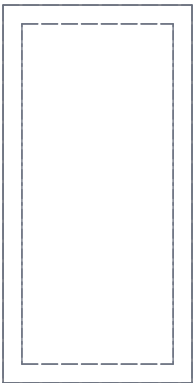

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

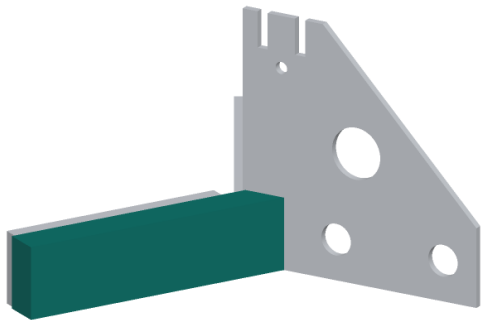

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two, one a mirror image of the other. RHS 50 x 25 x 2.5, the 50 face vertical; the 25 depth runs away from the trunk. Length 175 along the trunk-side face; the inner end is cut at 30 deg so it lies flat on the spine face. Weld a 3 mm cap on the outer end. Drill an 8 vent hole in the bottom face near each end before galvanising. Drill two 6.5 holes through the trunk-side face only, 53 and 138 from the inner end on the centre line, for the pad screws. The two bars meet the spine at its foot and form a V with 120 deg between their trunk-side faces.

TRUNKBELAY

github.com/BoujeeEnjinia1701/trunkbelay

TrunkBelay: bearing bar (make 2, opposite hands)

DRAWING NO. TKB-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES S355 rectangular hollow section 50 x 25 x 2.5 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	