


CONCEPT, NOT FOR FABRICATION


TwinKit · github.com/BoujeeEnjinia1701/twinkit

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC

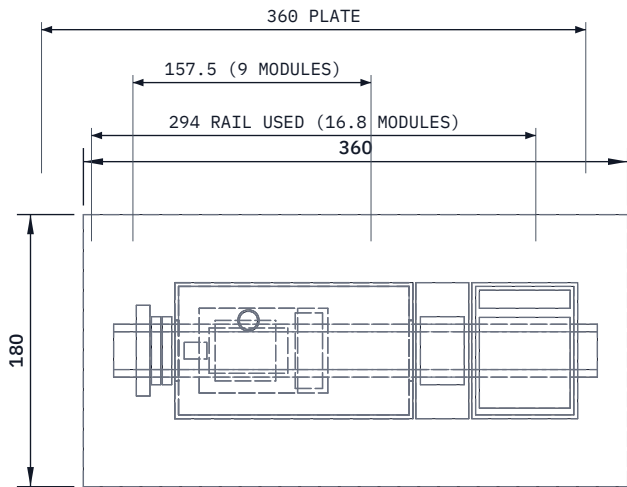

TOP VIEW

Scale 1:5; looking down (along -Z)

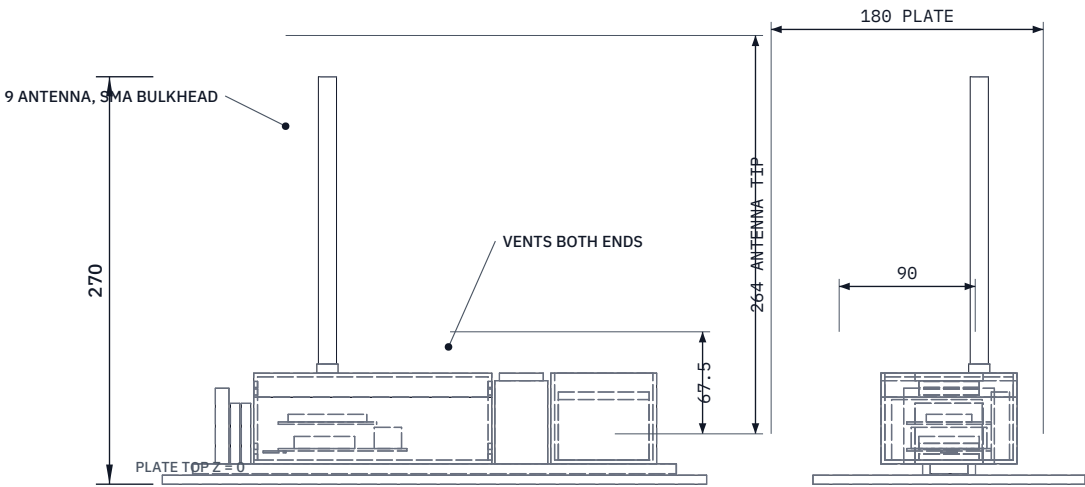


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

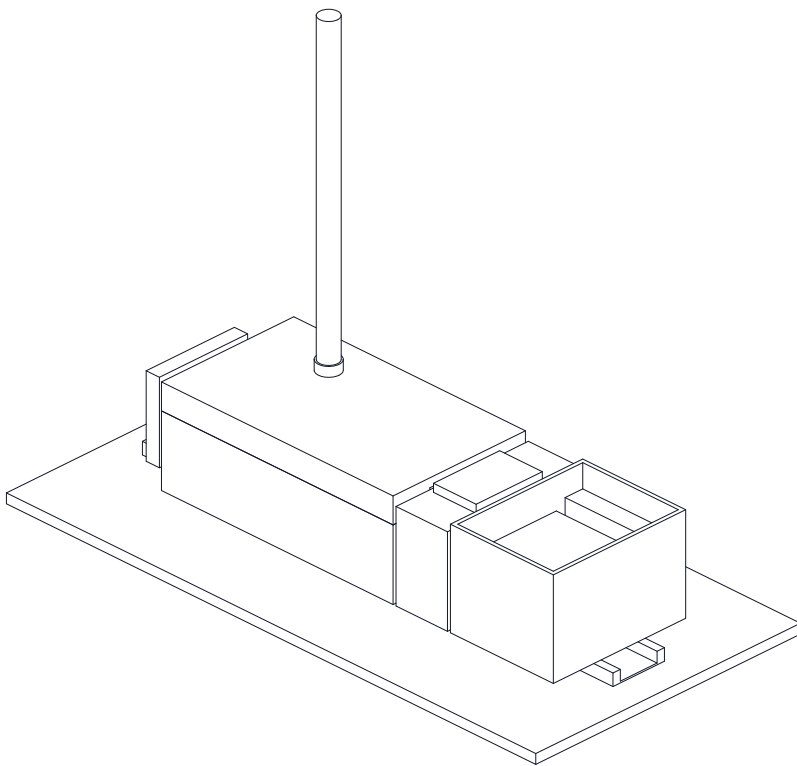

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

TS35 x 7.5 rail, 320 long; module pitch 17.5

13 terminals and 3.15 A T fuse | 3, 4 enclosure 9 mod | 10 DC-DC 2 mod | 11, 12 UPS 4 mod

Enclosure 157.5 x 90 x 60 above the rail; top 67.5 above the plate

Vents 640 mm² low and high, 42 apart (TWK-CAL-001 F)

5 board 85 x 56 on 6 standoffs; 7 HAT on 40-pin header

Input 9 to 30 V DC, 12 V nominal; 6.4 W average, 20.6 W peak

Pack 12.8 V, 1.5 Ah LiFePO₄ with BMS, inside the UPS module

Plate 360 x 180 x 6; omit in a cabinet

Third-angle; front view from -Y; X along the rail

TWINKIT

github.com/BoujeeEnjinia1701/twinkit

General arrangement, edge gateway

DRAWING NO.

TWK-DWG-001

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:5

UNITS

mm

PROJECTION



DATE

2026-09-25

DRAWN

Amish Chadha

MATERIAL / NOTES

Bought-in DIN modules per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION