



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

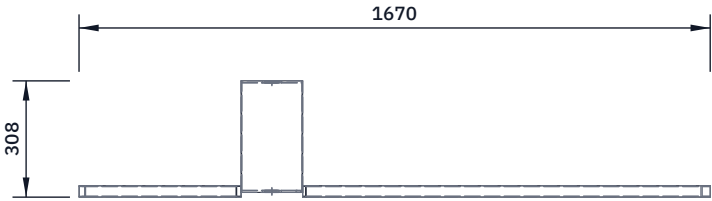


TOP VIEW

Scale 1:20; looking down (along -Z)

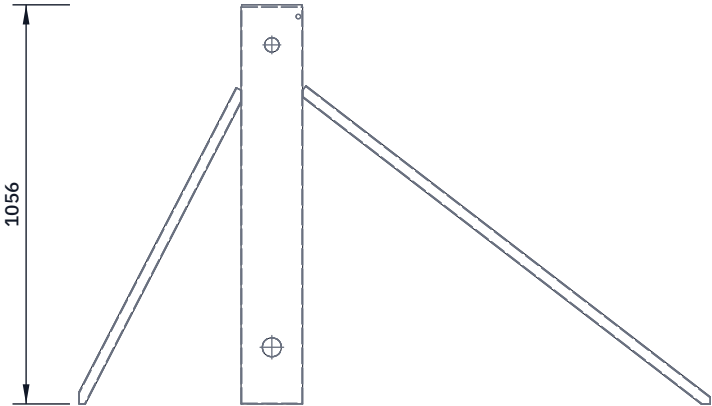


FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

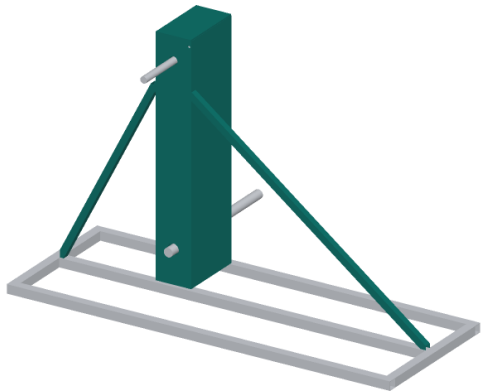

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Two plates 160 x 1050 x 5, set 290 apart (centres), front and rear.

In both plates: a 50 hole 150 up from the bottom edge (jackshaft) and a 38 hole 950 up (crank shaft), both on the centre line. Drill as a pair.

Rear plate only: 12 hole for the pawl pin, 70 right of and 75 above the crank hole.

Weld 1.5 mm side sheets on both long edges and a bottom sheet, so the box is closed round the chain; weld a 6 mm top plate on.

Bend 40 mm tabs at the foot of each plate for 2 x M8 into the rails.

Braces: 30 x 30 x 2 SHS from 830 up the tower side to the mid rail ends; cut the ends to sit flat; bolt M8 both ends.

Check: a 40 bar passes through both 50 holes square to the plates.

VATREEL

github.com/BoujeeEnjinia1701/vatreel

VatReel: bearing tower and braces (make 1)

DRAWING NO.

VTR-DWG-102

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-10-03

DRAWN

Amish Chadha

MATERIAL / NOTES

304 stainless plate 5, sheet 1.5, plate 6; SHS 30 x 30 x 2