




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

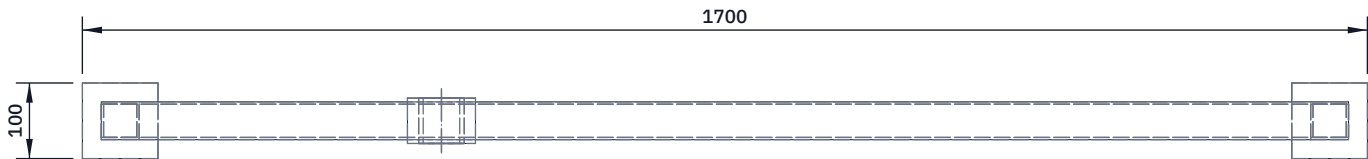


TOP VIEW
Scale 1:10; looking down (along -Z)

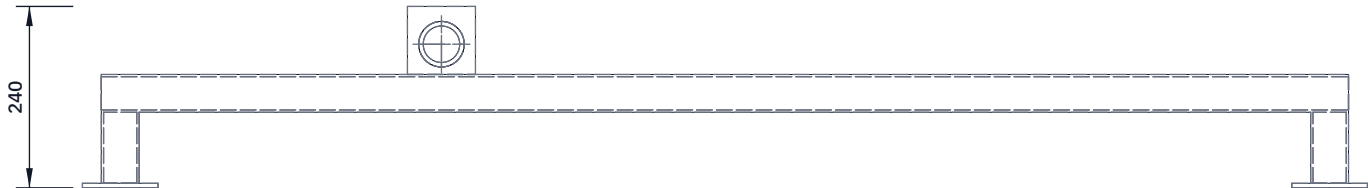

FRONT VIEW
Scale 1:10; looking at the front (along +Y)



RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

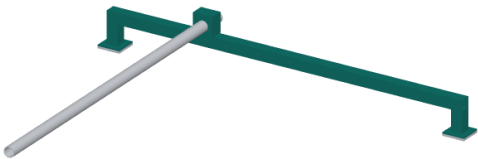

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Crossbeam 1650 of SHS; two legs 94 of SHS at its ends, welded.
Foot plates 100 x 100 x 6 under the legs; EPDM pads glued under.
Clamp block 90 x 60 x 90, bored 60.5 on a centre 40 above its base, then sawn across on the bore centre line; 2 M10 hold the cap.
Weld the lower half on the crossbeam centre, bore along the pit.
Sleeve: 60.3 pipe 60 long bored to fit the extension, sawn in two along its length; used only when clamping the extension tube.
Fits: stands on the far rim 100 back from the edge.
Check: bore centre 200 above the pad undersides.

VATREEL

github.com/BoujeeEnjinia1701/vatreel

VatReel: far stand (make 1)

DRAWING NO.
VTR-DWG-111

REV
P1

SHEET
1 of 1

SIZE
ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-10-03

DRAWN

Amish Chadha

MATERIAL / NOTES

304 SHS 50 x 50 x 3; plate 6; block 90 x 60 x 90