



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

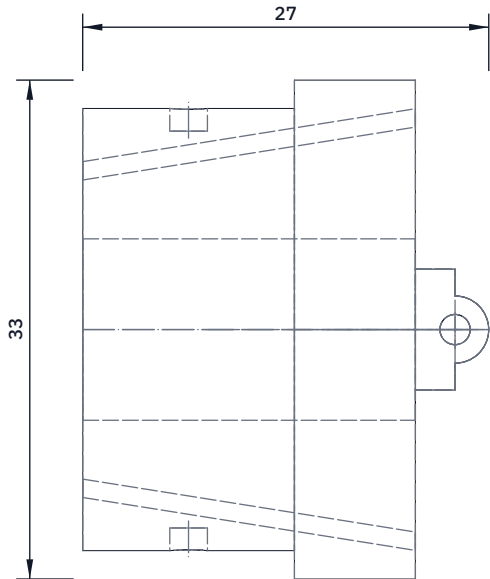


TOP VIEW

Scale 2:1; looking down (along -Z)

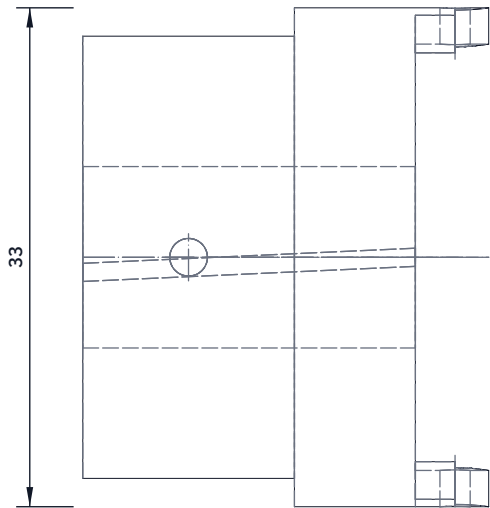


FRONT VIEW

Scale 2:1; looking at the front (along +Y)

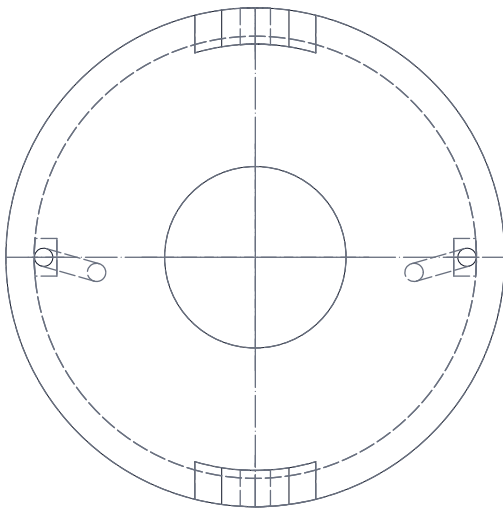

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

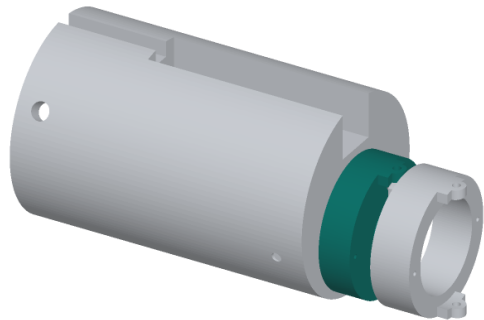

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lathe: 29.25 mm spigot 14 mm long, 33 mm flange 8 mm, 12 mm bore through. The spigot is a close slide fit in the nose's 29.3 mm bore.

Front: leave a 4.9 mm stub at 33 mm outside; mill it away to two outer lugs, 8 mm wide, top and bottom, outside 14.1 mm from the centre; round the lug ends.

Drill 2.0 mm pin holes 2.6 mm ahead of the flange face.

Wire holes 1.2 mm, drilled on a slant: from 10.5 mm out and 1 mm low at the back face to 14 mm out on the centre line at the flange front (a drill jig helps).

Two dimples 1.5 mm deep, 7 mm from the spigot's front end, on the sides, for the M3 grub screws in the nose.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope base link: making sketch

DRAWING NO. VDS-DWG-111			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 6061-T6 round bar 35 mm, 25 mm long					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand