



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

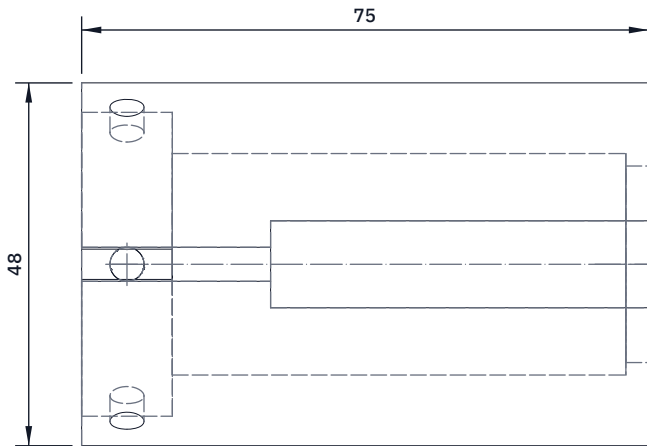


TOP VIEW

Scale 1:1; looking down (along -Z)

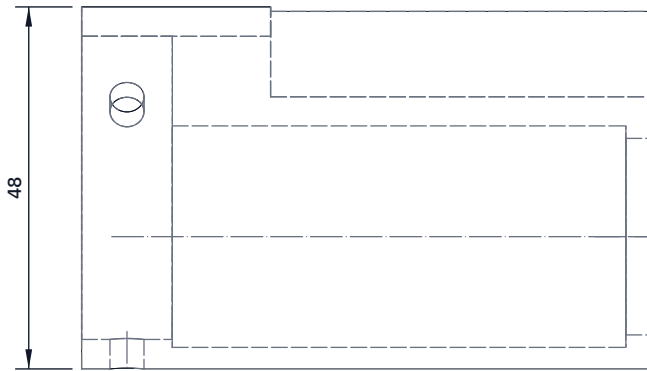


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

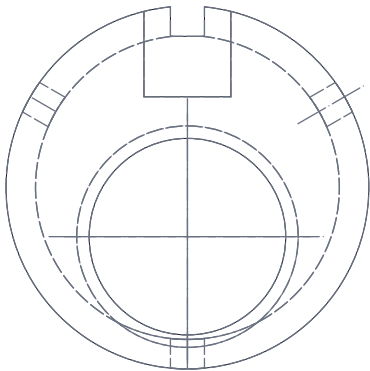

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

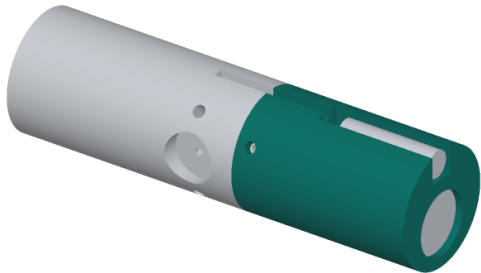

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lathe: face and turn to 48 mm outside, 75 mm long.
Back end: bore 40.2 mm, 12 mm deep, for the collar spigot.
Offset the work 6.5 mm (4-jaw chuck): bore the camera
29.3 mm from 12 to 72 mm, then 26 mm through the front
3 mm. The camera sits below the axis; walls 2.85 mm.
Mill or saw and file on top: pocket 11.5 mm wide, floor
12 mm above the axis, 50 mm back from the front face.
Groove on top 4.5 mm wide, floor 20 mm above the axis,
from the back face to the pocket (breaks into the bore).
Three 4.5 mm holes 6 mm from the back face, at 30, 150
and 270 deg from the side; countersink for M4.
Break all edges 0.5 mm. Check: camera slides in by hand.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope nose: making sketch

DRAWING NO. VDS-DWG-103		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES 6061-T6 round bar 50 mm, 80 mm long				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	