



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

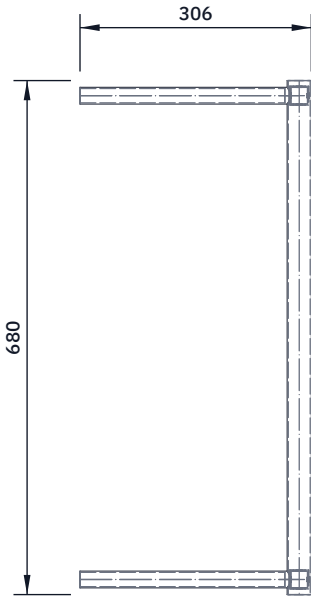

TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

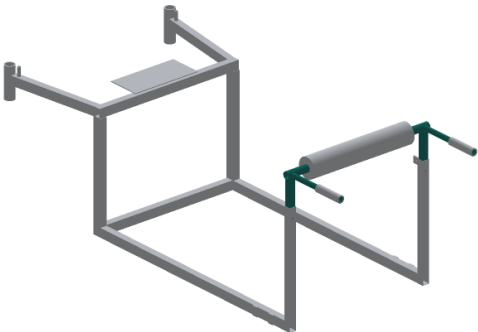

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bar: 32 mm tube 680 long. Posts: 25 x 25 tube, 2 x 364 long, 640 apart centre to centre, saddle-coped to the bar.

Grip tubes: 22.2 mm tube, 2 x 277 long, along the posts' line, coped to the back of the bar, pointing back toward the user.

Weld on a flat table with the posts square to the bar.

Height holes: nine 6.5 mm holes through each post, front to back, 25 apart; the top one 75 below the bar centre.

Fit: the posts slide into the hip sleeves (1 mm clearance each side); a 6 mm pin through sleeve and post holds the height, bar centre 850 to 1,050 above the ground.

Check: both posts enter and slide together without binding.

WATERWALKER

github.com/BoujeeEnjinia1701/waterwalker

WaterWalker hip bar weldment: making sketch

DRAWING NO.

WWK - DWG - 107

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Steel tube 32 x 1.5 mm; square tube 25 x 25 x 1.5 mm; tube 22.2 x 1.6 mm