



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

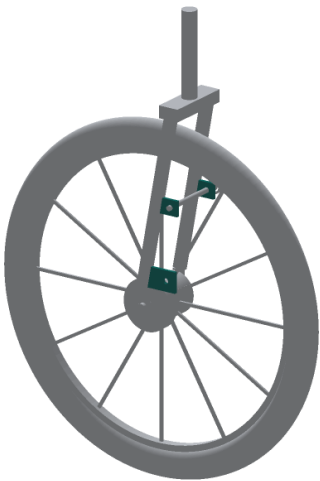

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lock pin tabs, make 2: 30 x 6 bar, about 40 long, one end shaped to sit on the back of the fork blade. Drill 10.5 mm, 20 from that end. Weld one to the inner and one to the outer blade of the left rear fork, 200 above and 60 behind the axle.

Jig both tabs with a 10 mm bar through both holes so they line up.

Torque-arm tabs, make 2: 30 x 6 bar 60 long (40 high), 11 mm hole 50 behind the axle; weld one to the back of the outer blade of each rear fork, centred 60 above the axle (two-motor kit).

Steel forks only. Clean off paint, short welds, no undercut on the blade; let them cool in air. Paint after.

Check: the 10 mm pin slides through both tabs with the wheel out.

WATERWALKER

github.com/BoujeeEnjinia1701/waterwalker

WaterWalker fork tabs: lock pin tabs (left rear) and torque-arm tabs (both rear)

DRAWING NO. WWK-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel flat bar 30 x 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand