



| REV | DESCRIPTION                                | DATE       | BY |
|-----|--------------------------------------------|------------|----|
| P1  | Making sketch for the prototype build plan | 2026-10-02 | AC |

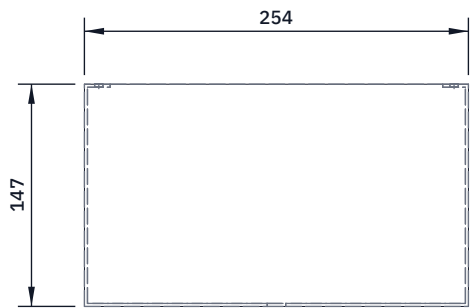


TOP VIEW

Scale 1:5; looking down (along -Z)

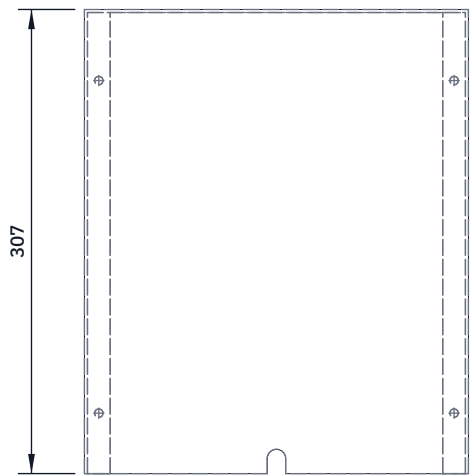


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

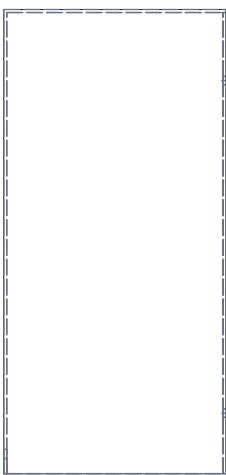

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

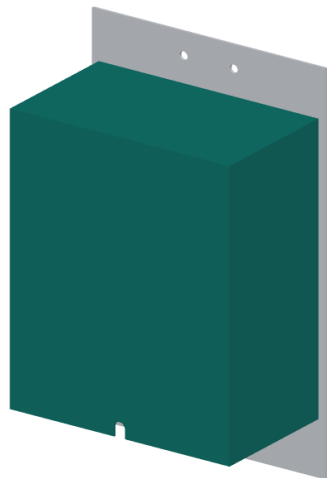

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Folded hood 254 wide, 147 deep, 307 tall outside, open at the

bottom and the back; 2 mm sheet, bent on a press brake.

Front 254 x 307; two sides 147 deep; top 254 x 147, joined to the

sides by folded tabs with two 4 mm rivets each.

Back edge of each side: a 15 mm flange folded 90 degrees inward.

Flange holes 5.5 mm, 7.5 in from the side sheet, 40 and 260 up

from the lower edge.

Powder coat white after folding; deburr every edge first.

Fit: flanges flat on the back plate, 10 clear of the box; four M5

thumb screws. 25 mm air gap at the front, sides and top.

Front panel: a 12.2 mm slot open at the bottom edge, its round end

10 mm up from the lower edge, for the status light unit.

To open the lid: pull the status light unit down out of its slot,

undo the four thumb screws, slide the shield forward.

Check: on a trial fit the gap is 25 mm (plus or minus 3) all round.

WATERWATCH

[github.com/BoujeeEnjinia1701/waterwatch](https://github.com/BoujeeEnjinia1701/waterwatch)

WaterWatch sun shield: making sketch (to a sheet metal shop)

DRAWING NO.

WWT-DWG-104

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:5

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

White powder-coated aluminium sheet 2 mm