


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

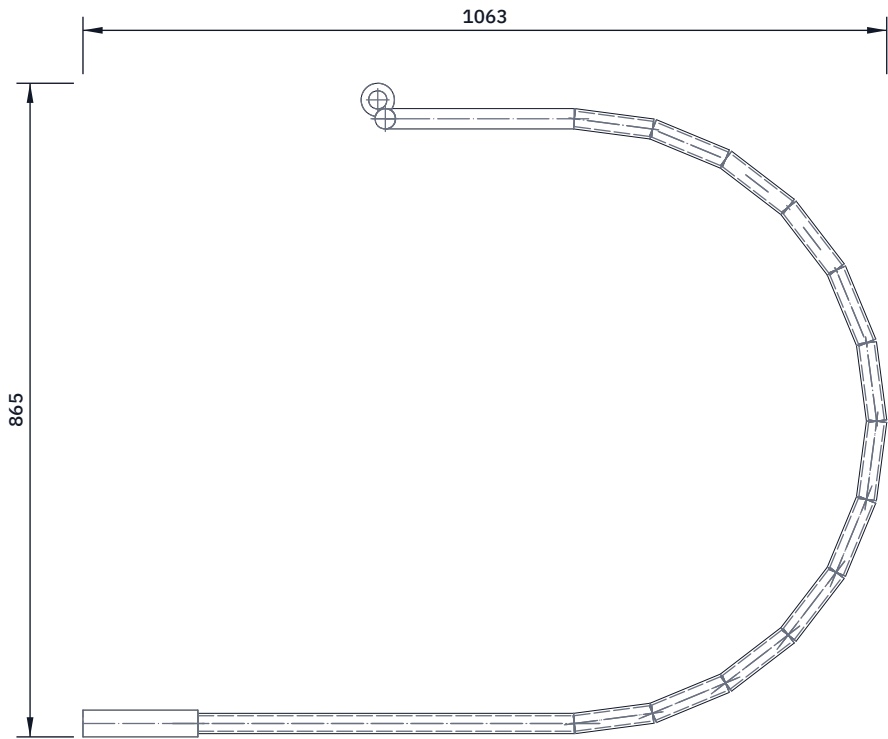


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

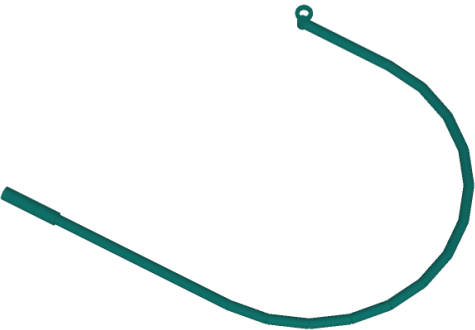

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make one. Tube 26.9 x 3.2 mm: a 500 mm straight shank, then a half-turn bend of 400 mm radius, then a 250 mm nose.

Bend cold on a former; no kinks. Round the nose end smooth.

Line eye: 44 mm washer plate, 24 mm hole, welded at the nose.

Spigot: 35.5 mm tube, 150 mm long, welded into the shank end with the button lock, to fit any pole section.

It is a separate tool. It never fixes to the band.

Check: the J slides under a 400 mm body without snagging.

WellSling: passer J-head (make 1)

DRAWING NO. WSL-DWG-111			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Steel tube 26.9 x 3.2 mm; 35.5 mm spigot; 6 mm plate eye					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	