

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-25	AC

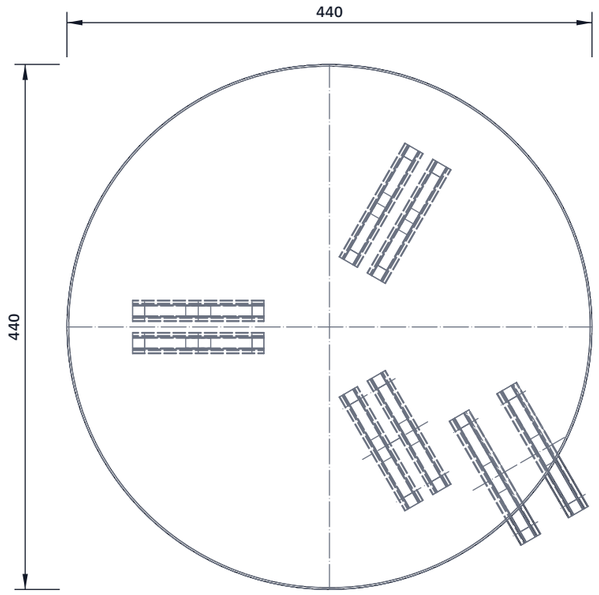


TOP VIEW

Scale 1:5; looking down (along -Z)

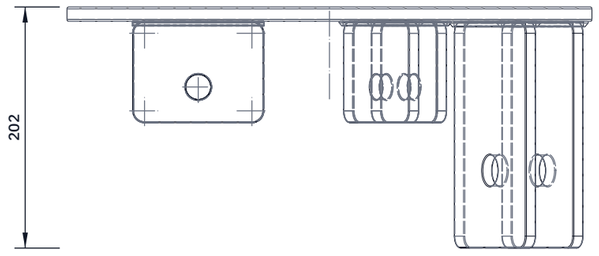

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

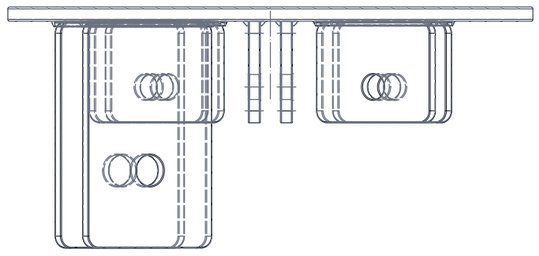

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make one. Disc 440 mm across, 12 mm S355 plate.
Leg lugs: six 110 x 85 x 10 mm plates under the disc, in three pairs at 120 deg, each pair 17 mm apart (inside faces) and centred 110 mm out from the middle, running outward.
21 mm hole in each, 55 mm below the disc, 110 mm out.
Sheave hangers: two 120 x 10 mm plates, 190 mm deep, hanging under the leg 1 pair, 36 mm apart (inside faces), 80 mm to one side of that pair and 179 mm out from the middle.
26 mm axle hole in each, 125 mm below the disc.
Profile cut; drill each pair together; 8 mm fillet welds.
Check: a 20 mm pin passes through each pair; the 25 mm axle passes both hangers; holes square to the plates.

WELLSLING github.com/BoujeeEnjinia1701/wellsling

WellSling: tripod head weldment (make 1)

DRAWING NO.	REV	SHEET	SIZE
WSL-DWG-106	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES
12 mm and 10 mm S355 plate, hot-dip galvanised

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com
Generated from cad/src; do not edit by hand