REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

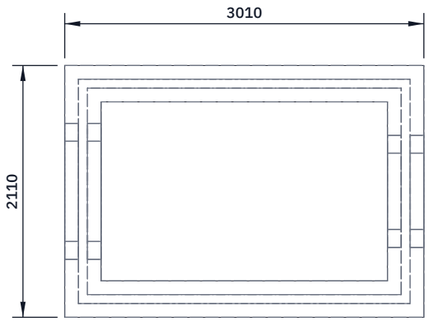

TOP VIEW

Scale 1:50; looking down (along -Z)

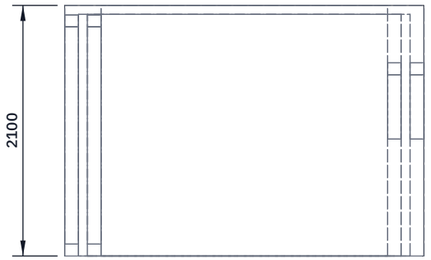

FRONT VIEW

Scale 1:50; looking at the front (along +Y)



RIGHT VIEW

Scale 1:50; looking at the right side (along -X)

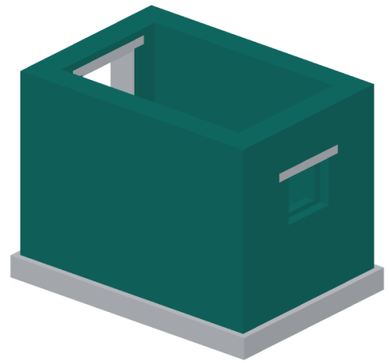

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Two 115 mm leaves with a 75 mm cavity: 305 mm wall. Outside 3,010 x 2,110 mm; inside 2,400 x 1,500 mm. 2,100 mm high.
Lay both leaves on the damp-proof strip together, a few courses at a time. Wall ties across the cavity every 900 mm along and every 450 mm up, staggered; keep the cavity clear of mortar.
Door opening (door end, centred): 840 wide, from 100 to 1,920 mm above ground. Bricks under it (to 100 mm) are the door sill.
Pad opening (pad end, centred): 640 wide x 540 high, from 980 to 1,520 mm above ground.
Lintels at 1,920 mm (door) and 1,520 mm (pad): see ZBX-DWG-104.
Fill the cavity as the walls rise (ZBX-BLD-001 step 3).
Capping course: the top 75 mm (2,025 to 2,100) bridges both leaves and the cavity in one course, in mortar, closing the fill in.
Check: plumb, level top within 10 mm, openings square.

ZEERBOX github.com/BoujeeEnjinia1701/zeerbox

ZeerBox double brick walls: making sketch

DRAWING NO.	REV	SHEET	SIZE
ZBX-DWG-103	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:50	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES
Fired brick, cement-sand mortar 1:5, galvanized wall ties

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand