

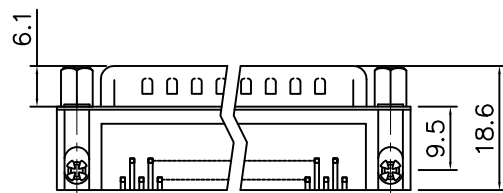



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

Customer Drawing

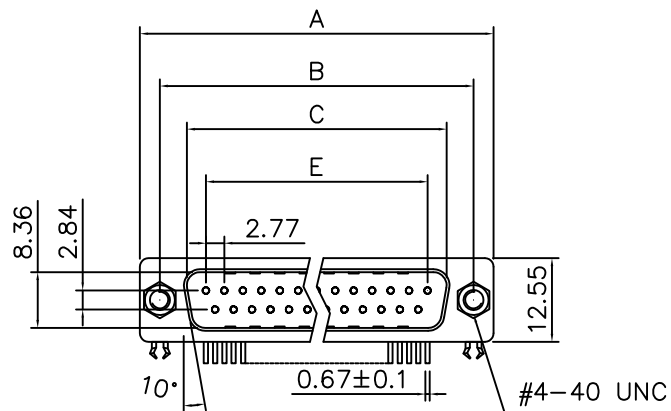

Dimensions

Shell size	Positions	A	B	C	E
E	09	30.81	24.99	16.92	11.08
A	15	39.20	33.30	25.25	19.39
B	25	53.05	47.04	38.96	33.24
C	37	69.40	63.50	55.42	49.86

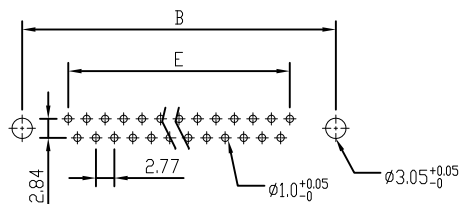

RECOMMENDED P.C.B. LAYOUT

TOLERANCE:±0.05MM



REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	10/21/10	Tony.Tang
2	HK--	Added pin OD	08/29'22	Tony.Tang

D-SUB TECHNICAL DATA

SHELL : Steel, 100u" min Tin plated over 50u" min Nickel over 50u" min Copper

BODY : PBT UL 94V-0 Color: Black

CONTACTS : Copper Alloy

30u" gold plated over 50u" min nickel on mating area.

100u" min tin over 50u" min nickel on solder area.

BOARDLOCK: Copper alloy, 100u" min Tin plated.

CHLINCH NUT: Copper alloy, 30u" min Nickel plated.

SCREWLOCK: Copper alloy, 30u" min Nickel plated.

ELECTRICAL : Voltage rating 250 V Rms

Current rating 3A.

Withstanding Voltage >1000 V Rms

Insulation resistance >1000 M Ohms

Contact resistance 25 mOhms max.

MARKING : Amphenol...(Series No.)

Commercial reference

Manufacturing date

PRODUCT CODE

L 717 SD X XX P A4 CH 4F C309

RoHS Compliant

717: Tinned shell + dimples for plug

Standard density

Shell size:
E, A, B, C

Configuration:
09, 15, 25, 37

C309= 30u" gold

Mounting option:
4F= Front screwlock 4-40

PCB locking type:
Grounding tab + boardlock

Footprint:
A4(MIL)

Contact type:
P= Pin

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	By: Wu	08/28'22
.X +/-	0.50	CHECKED	Tony.Tang	08/28'22
.XX +/-	0.30	CHECKED		
.XXX +/-	0.20			
FRACTIONS +/-				
ANGLES +/-	5°			
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :		
REMOVE SHARP EDGES		ANGLE OF PROJECTION		
DIMENSIONS				
U.S.	INCHES			
METRIC	MM			

Amphenol

TITLE
D-SUB connector, SD Series

SIZE	DRAWING NO.	REV.
A4	L717SDXXXXPA4CH4FC309	2
SCALE	NONE	SHEET 1 OF 1