


Lexus GS450H Inverter / Transmission Controller V2 Connector pinout

The controller requires two Molex plugs and pins.

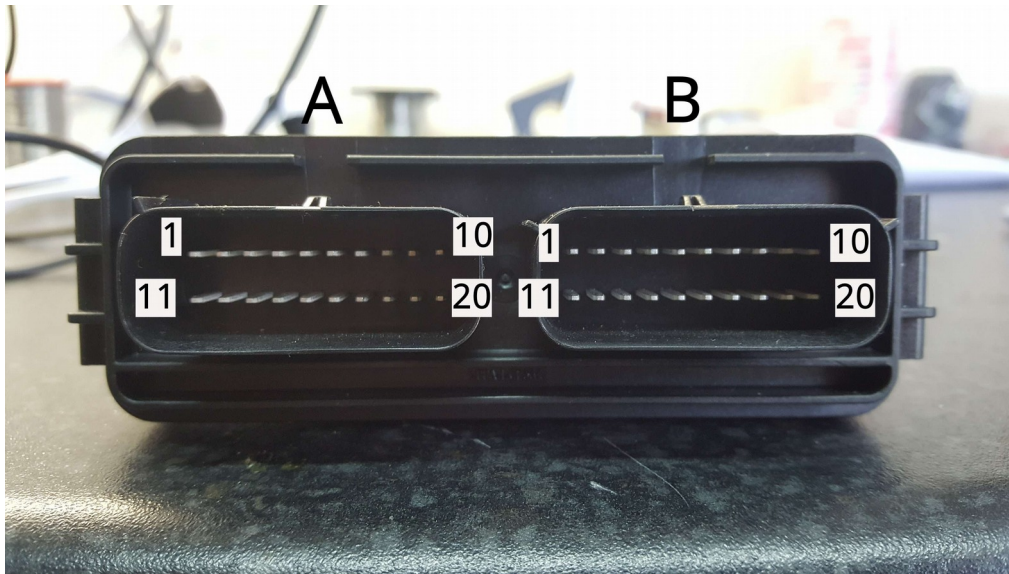

Plug A p/n :33472-2002 (Grey in Colour)

Plug B p/n: 33472-2001 (Black in Colour)

Pin p/n:33012-2002

Plug A pinout :

1	-	Oil pump temp +
2	-	Oil pump temp -
3	-	Trans pump temp +
4	-	Trans pump temp -
5	-	MG1 temp +
6	-	MG1 temp -
7	-	MG2 temp +
8	-	MG2 temp -
9	-	Trans PB1
10	-	Trans PB2
11	-	Trans PB3
12	-	Trans SP
13	-	Trans SL1-
14	-	Trans SL2-
15	-	Oil pump relay (low side switch) Oil 'Error' Light
16	-	Oil pump PWM
17	-	Out 1 Brake Light output (low side switch)
18	-	CAN 2 H ISA shunt, SimpBMS, Gauge.S (CAN0)
19	-	CAN 2 L ISA shunt, SimpBMS, Gauge.S (CAN0)
20	-	Ground

Plug B pinout :

1	-	12V Supply In
2	-	Brake light switch input Low Gear shift input
3	-	IN2 (General purpose 12v digital input) REV
4	-	IN1 (General purpose 12v digital input) FWD
5	-	GND Not Used
6	-	Inverter Relay (low side switch)
7	-	MTH-
8	-	MTH+
9	-	HTM-
10	-	HTM+
11	-	REQ-
12	-	REQ+
13	-	CLK-
14	-	CLK+
15	-	5V Out
16	-	Throttle 2 Input (0-5v analog) Not Used
17	-	Throttle 1 Input (0-5v analog)
18	-	CAN Low Gauges (CAN1)
19	-	CAN High Gauges (CAN1)
20	-	Ground