DMP Electronics Inc. 瞻營全電子股份有限公司
No.15, Wugong 5th Rd., Xinzhuang Dist., New Taipei City, #24890, Taiwan, R.O.C
Tel:+886-2 22980770 Fax:+886-2 22991883 email:info@dmp.com.tw.

Ordering Information of Vortex86EX

Date: 2012/12/27
Version: 1.0

- Subject

This document including the ordering, package and other related information about Vortex86EX.



Ordering information

- part no. : VX86EX-9123
- part description : Vortex86EX A9123 SOC 288 BGA

Size: 16x16 mm, 288 pins ball BGA, pictch 0.8mm (See appendix 1)
Net Weight: 0.588 g.


Packing: Tray packing, 96 pcs/Tray. 10 Trays/Box. (See appendix 2)


MSL Level: 3

HS code (Harmonized System Code) : 8542 3100


----------END----------


Next 2 pages
Appendix 1 : Vortex86EX dimension
Appendix 2 : Tray size.

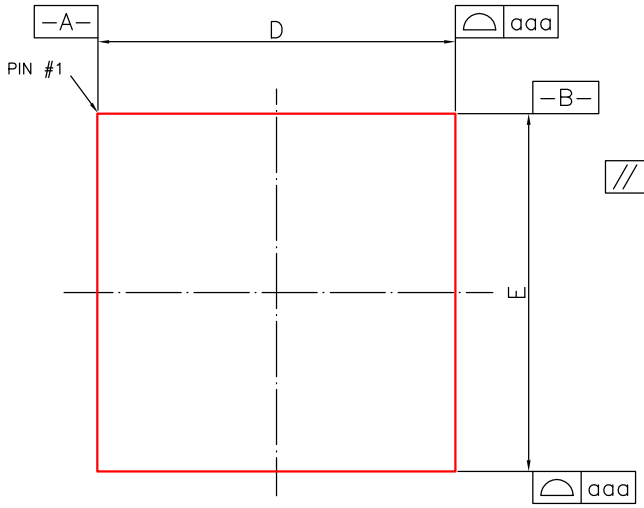

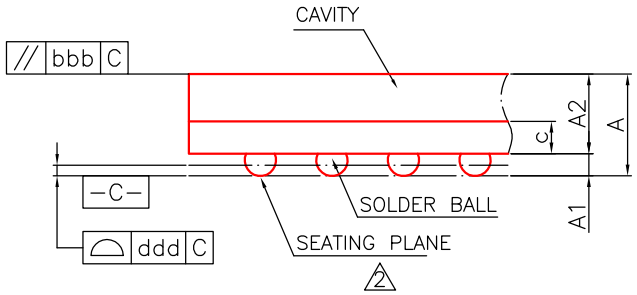


DETAIL : "A"



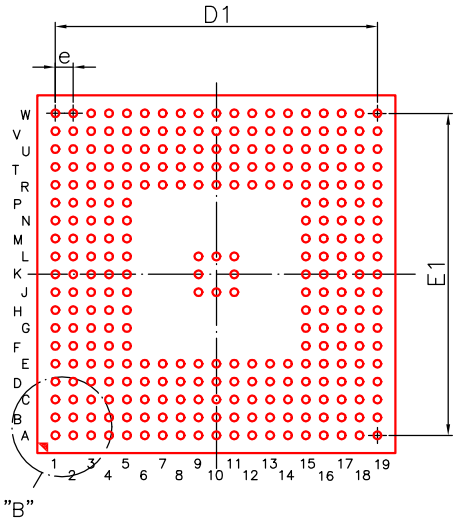





DETAIL : "B"

Symbol	Dimension in mm			Dimension in inch		
	MIN	NOM	MAX	MIN	NOM	MAX
A	---	---	1.30	---	---	0.051
A1	0.20	0.25	0.30	0.008	0.010	0.012
A2	0.84	0.89	0.94	0.033	0.035	0.037
c	0.32	0.36	0.40	0.013	0.014	0.016
D	15.90	16.00	16.10	0.626	0.630	0.634
E	15.90	16.00	16.10	0.626	0.630	0.634
D1	---	14.40	---	---	0.567	---
E1	---	14.40	---	---	0.567	---
e	---	0.80	---	---	0.031	---
b	0.30	0.35	0.40	0.012	0.014	0.016
aaa	0.10			0.004		
bbb	0.10			0.004		
ddd	0.12			0.005		
eee	0.15			0.006		
fff	0.08			0.003		
MD/ME	19/19			19/19		


NOTE :


1. CONTROLLING DIMENSION : MILLIMETER.
2. PRIMARY DATUM C AND SEATING PLANE ARE DEFINED BY THE SPHERICAL CROWNS OF THE SOLDER BALLS.
3. DIMENSION b IS MEASURED AT THE MAXIMUM SOLDER BALL DIAMETER, PARALLEL TO PRIMARY DATUM C.
4. THERE SHALL BE A MINIMUM CLEARANCE OF 0.25mm BETWEEN THE EDGE OF THE SOLDER BALL AND THE BODY EDGE.
5. REFERANCE DOCUMENT : JEDEC MO-205.
6. THE PATTERN OF PIN 1 FIDUCIAL IS FOR REFERENCE ONLY.

TITLE : 288LD TFBGA (16X16mm) PACKAGE OUTLINE			
SUBSTRATE MATERIAL : BT RESIN			
APPR.	Y.T.Lai	DWG NO.	TF288-SW6
ENG.	Andy Chiang Raymond Wu	REV NO.	A
Q.M	Yi Tsang Lin	PRODUCT CODE	TF28871
CHK.	Y.Y.Lai	DATE	08/12/'03
DWG.	R.K.Wang	SHT No.	1/1
SILICONWARE PRECISION INDUSTRIES CO., LTD.			


REV NO	DESCRIPTION	DATE

COPY CONTROLLED

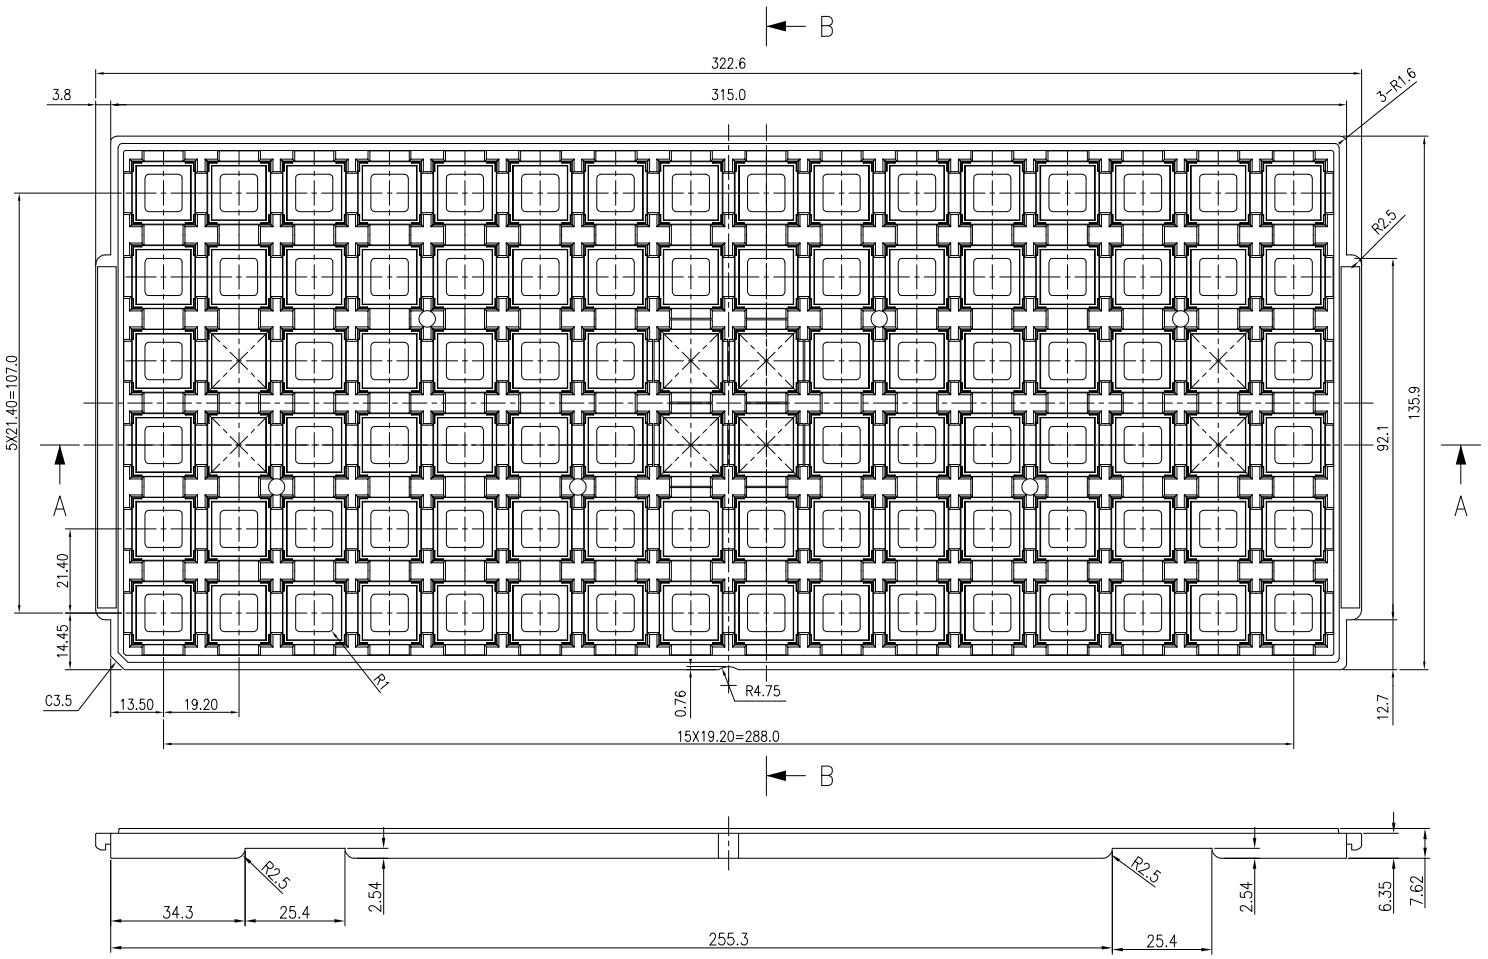

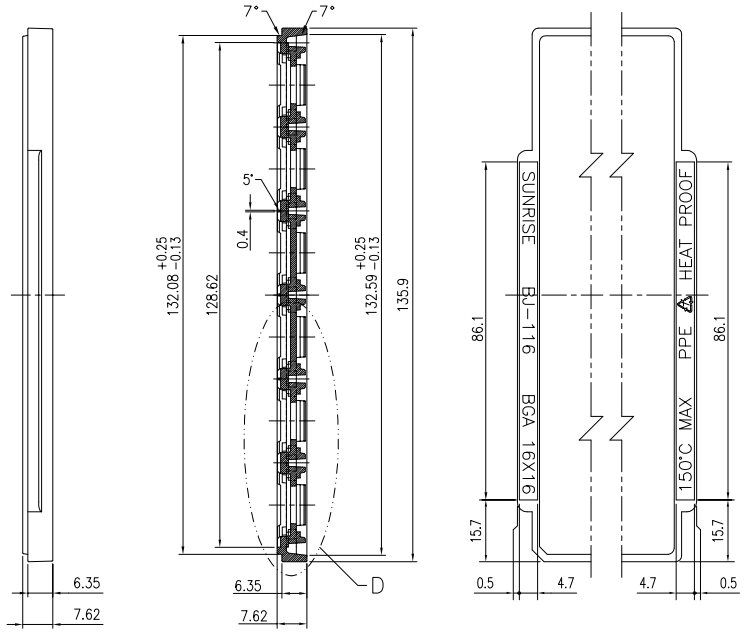


SECTION B–B

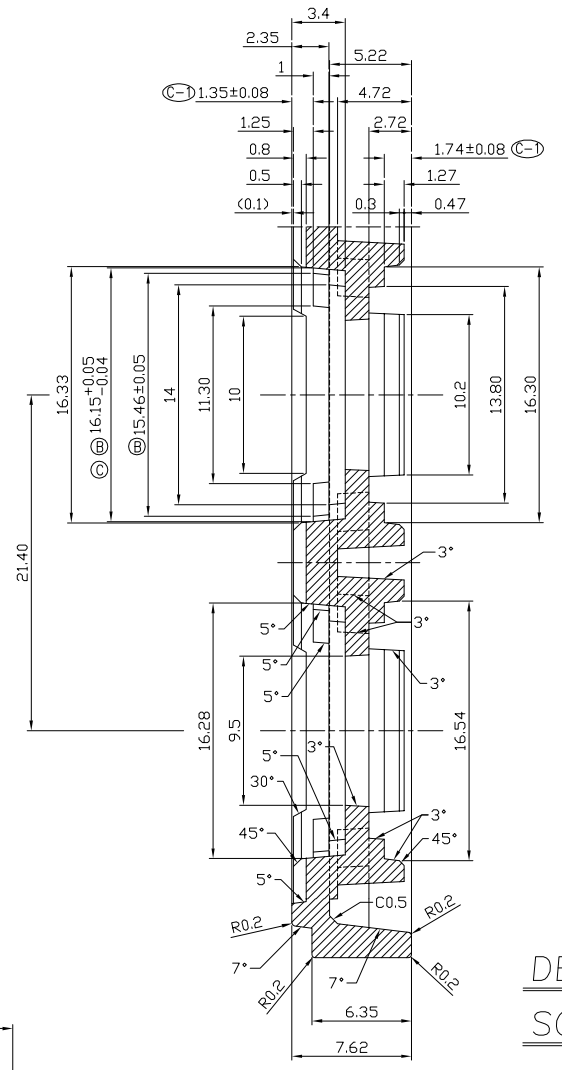



DETAIL D

SCALE 4:1

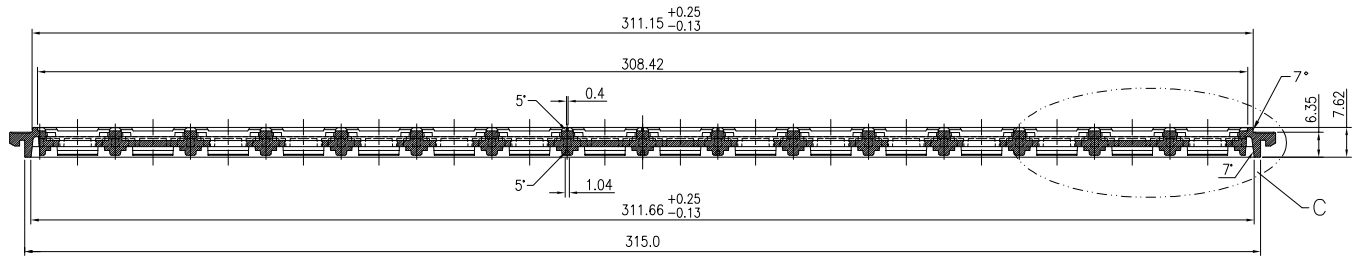

SECTION A–A

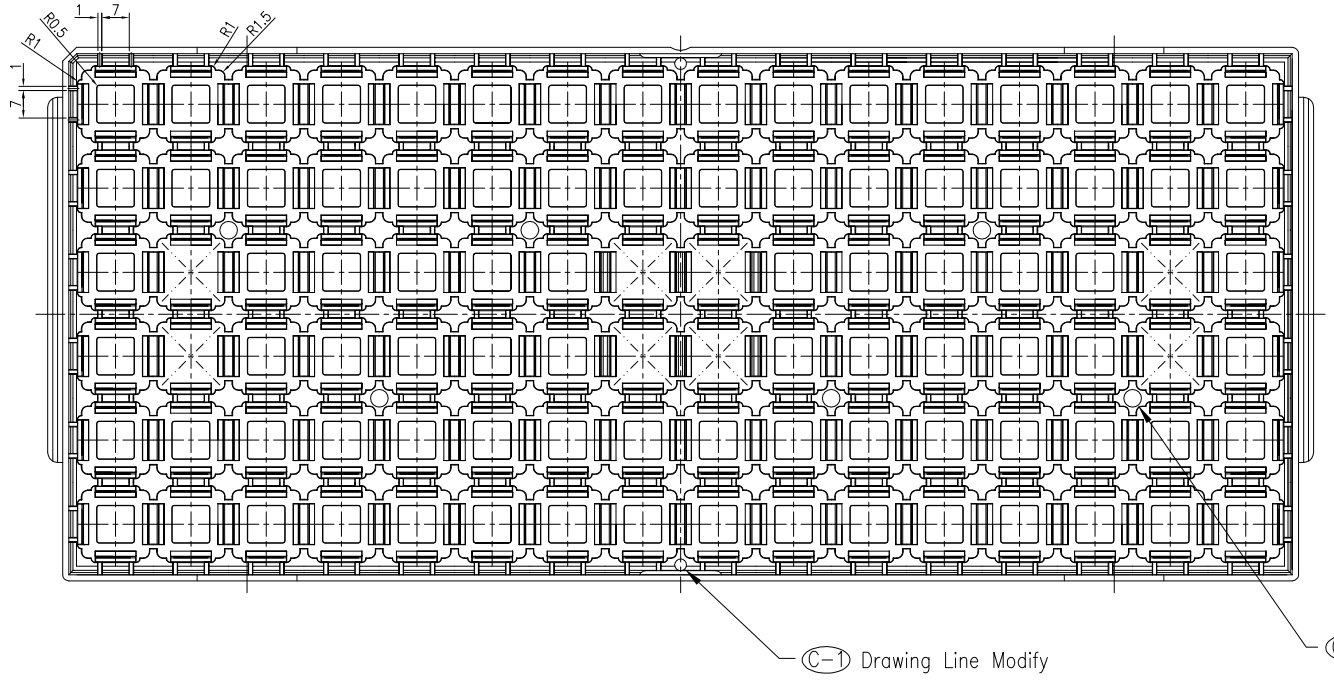

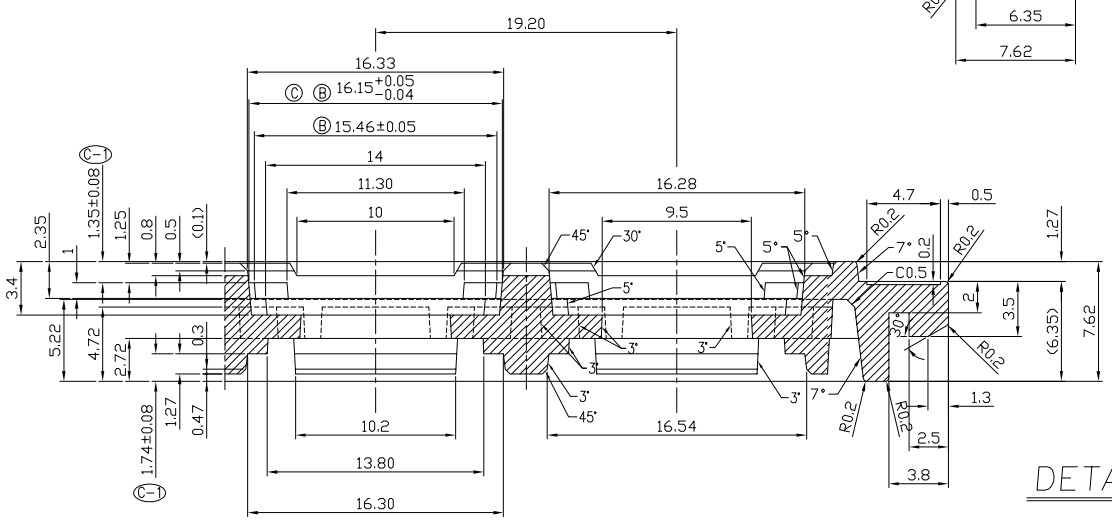

DETAIL C

SCALE 4:1

NOTE :

1. HEAT RESISTANCE UP TO 24 HOURS 150°C.
2. SURFACE ELECTRIC RESISTIVITY $1X10^{5}$~$9X10^{9}$ Ω/sq
3. WARPAGE IS WITHIN 0.76mm.
4. TOLERANCE : X=±0.5mm
   X.X=±0.25mm
   X.XX=±0.13mm
5. MATERIAL : POLYESTER THERMOPLASTIC ELASTOMER(P.P.E)
6. Ⓒ-1 FORBID USING THE FIRST CLASS ENVIRONMENT RESTRICTS SUBSTANCES MATERIAL

REV NO	VIOD DIM → NEW DIM	SIGN	DATE
Ⓒ-1	1. 1.35 → 1.35±0.08 2. 1.74 → 1.74±0.08 3. Add NOTE 6 4. Drawing Line Modify	JOHN	2007.06.15
Ⓒ	16.15±0.05 → 16.15 +0.05 −0.04	JOHN	2006.12.18
Ⓑ	1. 16.20 → 16.15 2. 15.36 → 15.46	B. S. Chiu	2006.05.08

TITLE:BGA 16X16mm JEDEC TRAY		SER. NO.	1
APPR.	DAVID LOU	DWG NO.	BJ-116
QM.	G. L. WANG	REV NO.	C-1
CHK.	Alex Wang	DATE	2004.10.13
DEN.	B. S. Chiu	SHT NO.	1/1

SUNRISE PLASTICS INDUSTRY CO., LTD.