CS 332
Computer Networks
Link Layer (1)

Professor Szajda

Last Time

- We talked about intra-AS routing protocols:
  - Which routing algorithm is used in RIP? OSPF?
  - What techniques allow OSPF to scale?
- We also talked about THE inter-AS routing protocol:
  - What two sub-protocols make up BGP?
  - How does BGP avoid routing loops?
  - Are there any security issues?

Aren't We Finished?

- This class is called "Computer Networks". What else is there below the network layer?
- Believe it or not, how you move packets on each hop is a non-trivial task.
  - Wireless is much different than Ethernet. What about the core?
- Looks like there is more to think about...

Chapter 5: The Data Link Layer

Our goals:

- understand principles behind data link layer services:
  - error detection, correction
  - sharing a broadcast channel: multiple access
  - link layer addressing
  - reliable data transfer, flow control: done!
- instantiation and implementation of various link layer technologies

Link Layer

- 5.1 Introduction and services
- 5.2 Error detection and correction
- 5.3 Multiple access protocols
- 5.4 Link-Layer Addressing
- 5.5 Ethernet
- 5.6 Hubs and switches
- 5.7 PPP
- 5.8 Link Virtualization: ATM and MPLS

Link Layer: Introduction

Some terminology:

- hosts and routers are nodes
- communication channels that connect adjacent nodes along communication path are links
  - wired links
  - wireless links
  - LANs
- layer-2 packet is a frame, encapsulates datagram

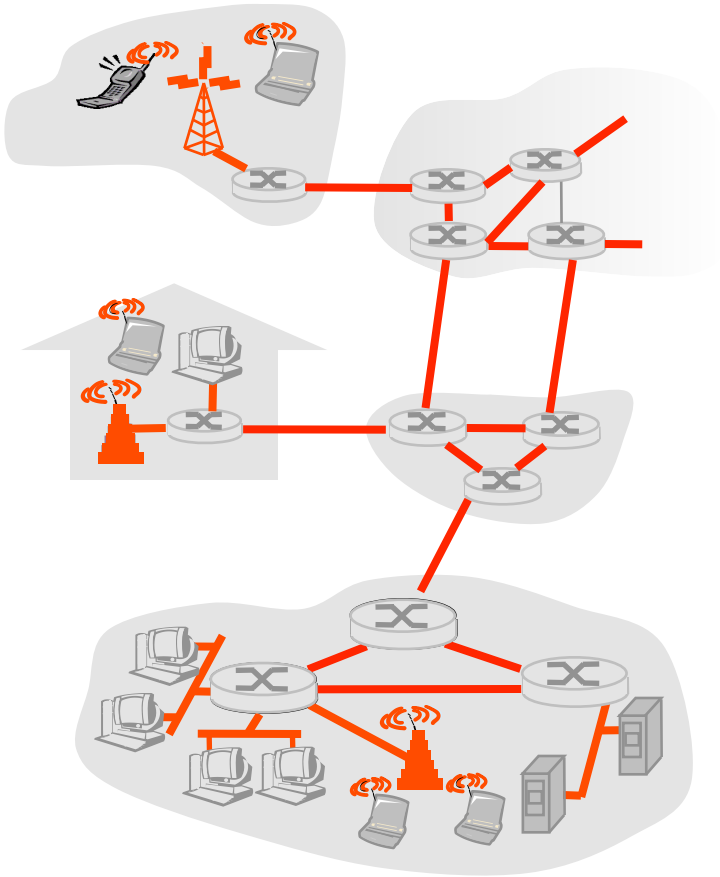

data-link layer has responsibility of transferring datagram from one node to adjacent node over a link

Link layer: context

- Datagram transferred by different link protocols over different links:
  - e.g., Ethernet on first link, frame relay on intermediate links, 802.11 on last link
- Each link protocol provides different services
  - e.g., may or may not provide rdt over link

transportation analogy

- trip from Princeton to Lausanne
  - limo: Princeton to JFK
  - plane: JFK to Geneva
  - train: Geneva to Lausanne
- tourist = datagram
- transport segment = communication link
- transportation mode = link layer protocol
- travel agent = routing algorithm

Link Layer Services

- Framing, link access:
  - encapsulate datagram into frame, adding header, trailer
  - channel access if shared medium
  - "MAC" addresses used in frame headers to identify source, dest
    - different from IP address!
- Reliable delivery between adjacent nodes
  - we learned how to do this already (chapter 3)!
  - seldom used on low bit error link (fiber, some twisted pair)
  - wireless links: high error rates
    - Q: why both link-level and end-end reliability?

Link Layer Services (more)

- Flow Control:
  - pacing between adjacent sending and receiving nodes
- Error Detection:
  - errors caused by signal attenuation, noise.
  - receiver detects presence of errors:
    - signals sender for retransmission or drops frame

- Error Correction:
  - receiver identifies and corrects bit error(s) without resorting to retransmission
- Half-duplex and full-duplex
  - with half duplex, nodes at both ends of link can transmit, but not at same time

Where is the link layer implemented?

- in each and every host
- link layer implemented in "adaptor" (aka *network interface card* NIC)
  - Ethernet card, PCMCI card, 802.11 card
  - implements link, physical layer
- attaches into host's system buses
- combination of hardware, software, firmware

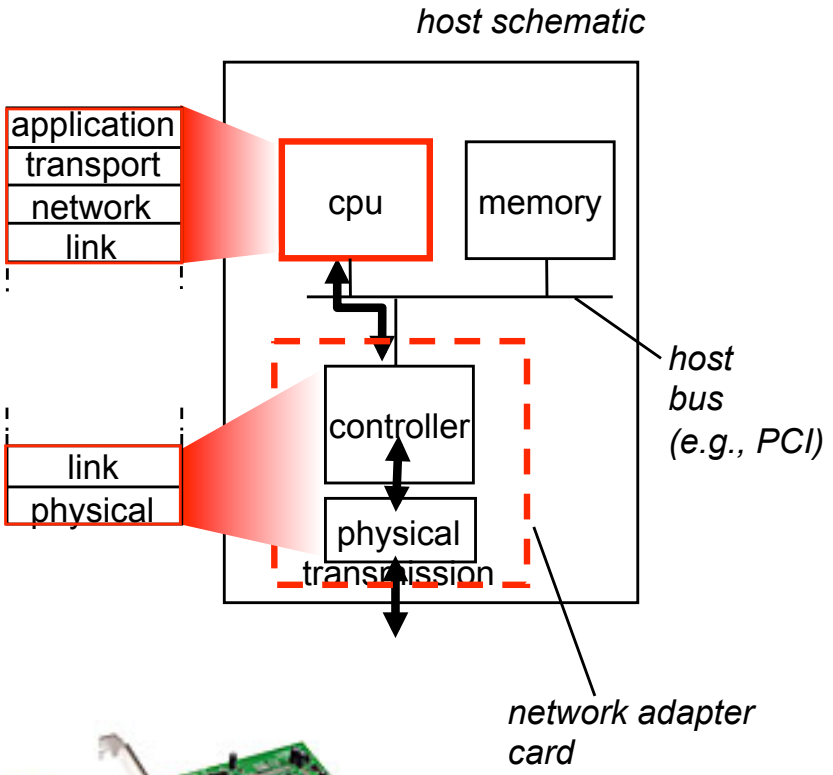

Adaptors Communicating

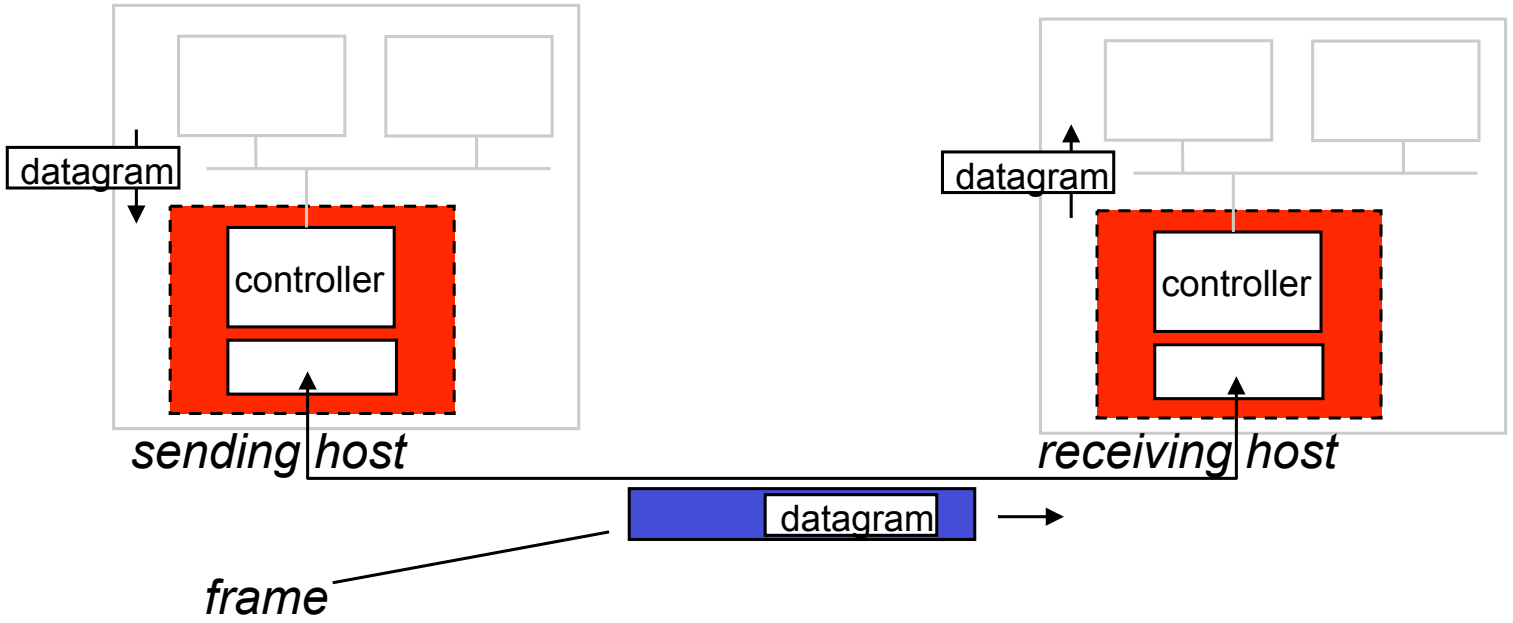

- sending side:
  - encapsulates datagram in a frame
  - adds error checking bits, rdt, flow control, etc.
- receiving side
  - looks for errors, rdt, flow control, etc
  - extracts datagram, passes to rcving node

Link Layer

- 5.1 Introduction and services
- 5.2 Error detection and correction
- 5.3Multiple access protocols
- 5.4 Link-Layer Addressing
- 5.5 Ethernet
- 5.6 Hubs and switches
- 5.7 PPP
- 5.8 Link Virtualization: ATM

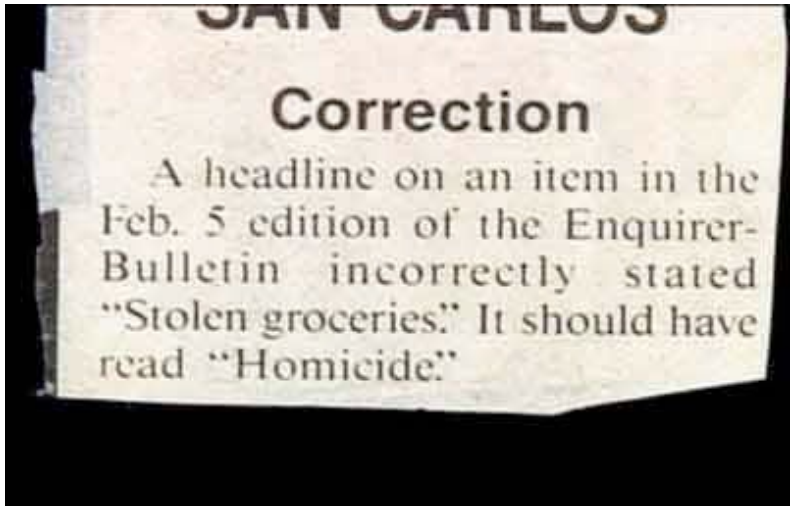

Error Detection

EDC= Error Detection and Correction bits (redundancy)
D = Data protected by error checking, may include header fields

- Error detection not 100% reliable!
  - protocol may miss some errors, but rarely
  - larger EDC field yields better detection and correction

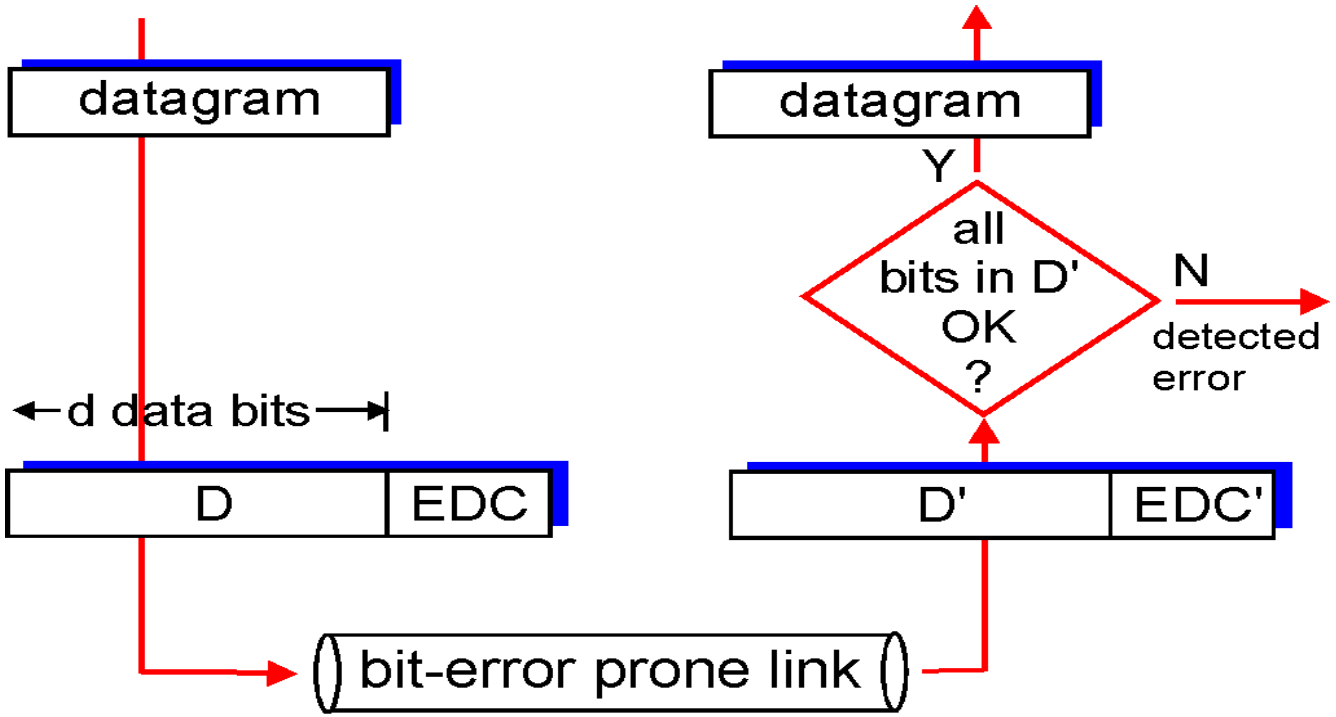

Parity Checking

Single Bit Parity:

Detect single bit errors

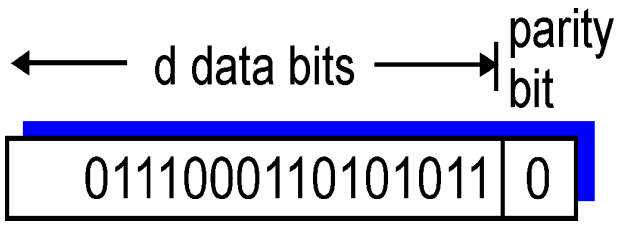

Two Dimensional Bit Parity:

Detect and correct single bit errors

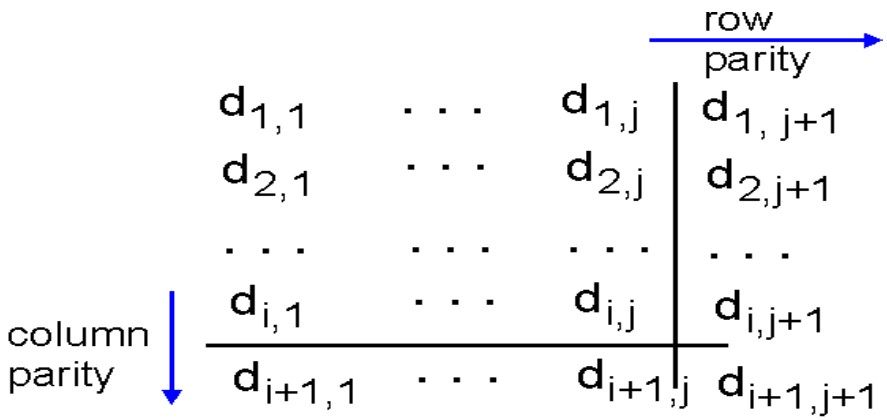



no errors

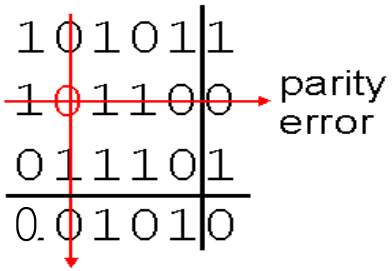

correctable single bit error

Internet checksum

Goal: detect "errors" (e.g., flipped bits) in transmitted segment (note: used at transport layer only)

Sender:

- treat segment contents as sequence of 16-bit integers
- checksum: addition (1's complement sum) of segment contents
- sender puts checksum value into UDP checksum field

Receiver:

- compute checksum of received segment
- check if computed checksum equals checksum field value:
  - NO - error detected
  - YES - no error detected. But maybe errors nonetheless? More later ….

Checksumming: Cyclic Redundancy Check

- view data bits, D, as a binary number
- choose r+1 bit pattern (generator), G
- goal: choose r CRC bits, R, such that
  - <D,R> exactly divisible by G (modulo 2)
  - receiver knows G, divides <D,R> by G. If non-zero remainder: error detected!
  - can detect all burst errors less than r+1 bits
- widely used in practice (ATM, HDLC)

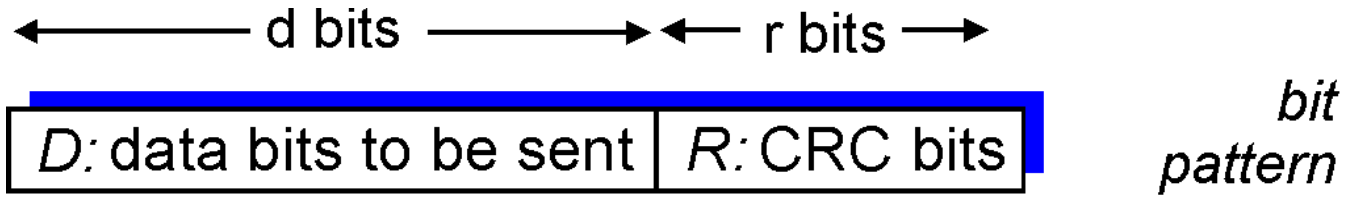

$D * 2^r \quad XOR \quad R$

mathematical formula

CRC Example

Want:

$D \cdot 2^r$ XOR R = nG

equivalently:

$D \cdot 2^r$ = nG XOR R

equivalently:

if we divide $D \cdot 2^r$ by G,
want remainder R

$$R = \text{remainder}\left[\frac{D \cdot 2^r}{G}\right]$$

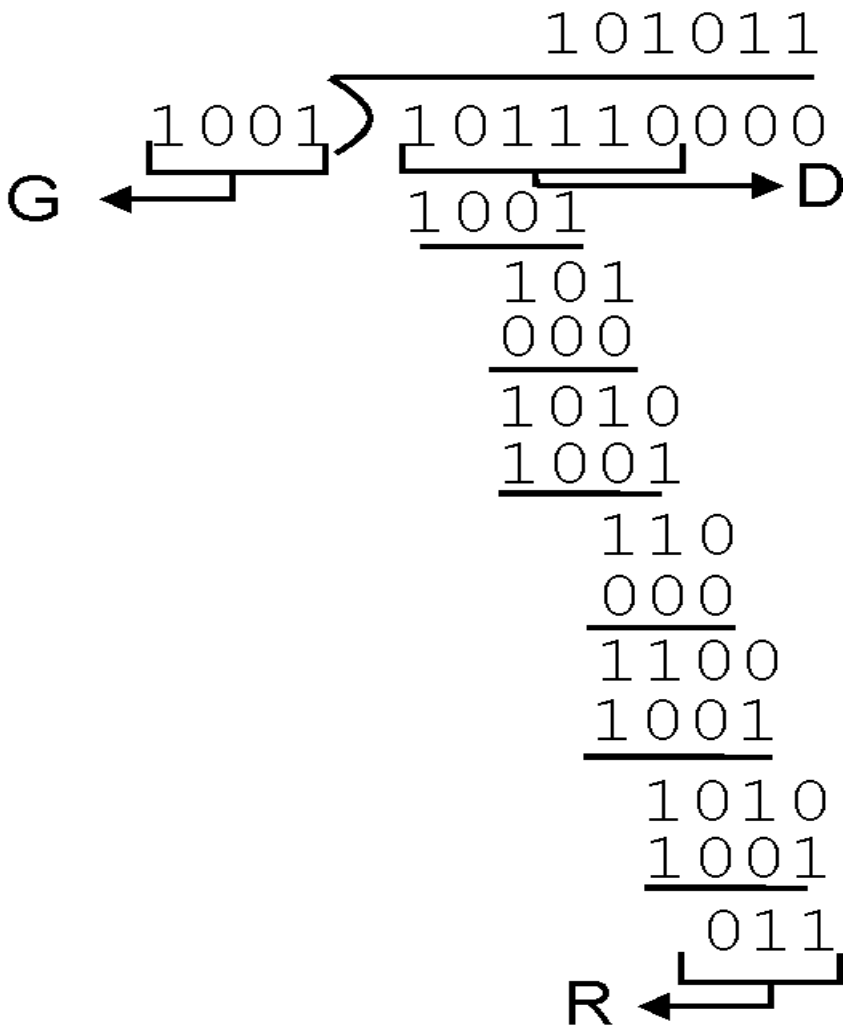

CRC Facts

- International Standards Defined for 8, 12, 16, and 32 bit generators G
  - G_{CRC-32} = 1 00000100 11000001 00011101 10110111
- Detects burst errors of fewer than r + 1 bits
  - All consecutive bit errors of length <= r will be detected
  - Burst of length greater than r + 1 are detected with probability 1 - $(0.5)^r$
  - Can detect any odd number of bit errors
- See Prof. Davis for details

Link Layer

- 5.1 Introduction and services
- 5.2 Error detection and correction
- 5.3 Multiple access protocols
- 5.4 Link-Layer Addressing
- 5.5 Ethernet
- 5.6 Hubs and switches
- 5.7 PPP
- 5.8 Link Virtualization: ATM

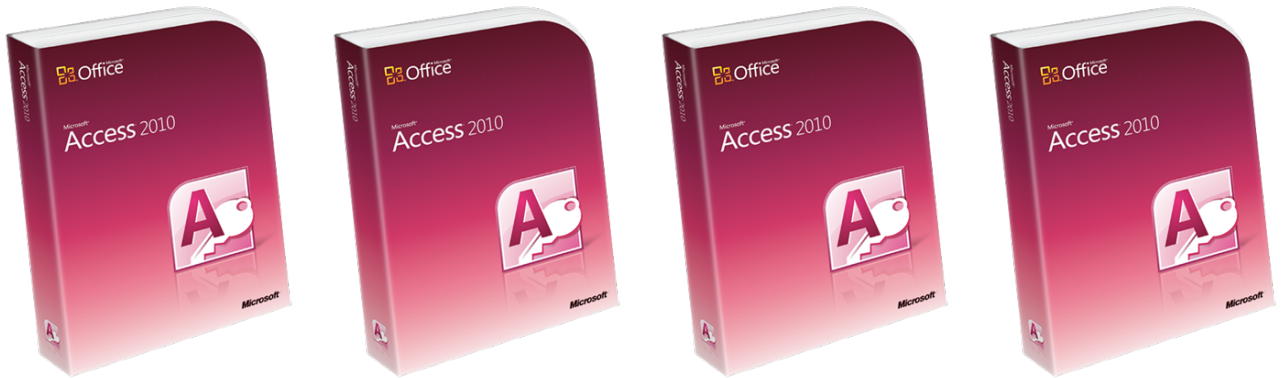

Multiple Access Links and Protocols

Two types of "links":

- point-to-point
  - PPP for dial-up access
  - point-to-point link between Ethernet switch and host
- broadcast (shared wire or medium)
  - Old-fashioned Ethernet
  - upstream HFC (Hybrid Fiber-Coaxial)
  - 802.11 wireless LAN



shared wire (e.g., cabled Ethernet)

shared RF (e.g., 802.11 WiFi)



shared RF (satellite)

humans at a cocktail party (shared air, acoustical)

Multiple Access protocols

- single shared broadcast channel
- two or more simultaneous transmissions by nodes: interference
  - collision if node receives two or more signals at the same time

multiple access protocol

- distributed algorithm that determines how nodes share channel, i.e., determine when node can transmit
- communication about channel sharing must use channel itself!
  - no out-of-band channel for coordination

Ideal Multiple Access Protocol

Broadcast channel of rate R bps

1. When one node wants to transmit, it can send at rate R.
2. When M nodes want to transmit, each can send at average rate R/M
3. Fully decentralized:
   - no special node to coordinate transmissions
   - no synchronization of clocks, slots
4. Simple

MAC Protocols: a taxonomy

Three broad classes:

- Channel Partitioning
  - divide channel into smaller "pieces" (time slots, frequency, code)
  - allocate piece to node for exclusive use
- Random Access
  - channel not divided, allow collisions
  - "recover" from collisions
- "Taking turns"
  - Nodes take turns, but nodes with more to send can take longer turns

Channel Partitioning MAC protocols: TDMA

TDMA: time division multiple access

- access to channel in "rounds"
- each station gets fixed length slot (length = pkt trans time) in each round
- unused slots go idle
- example: 6-station LAN, 1,3,4 have pkt, slots 2,5,6 idle

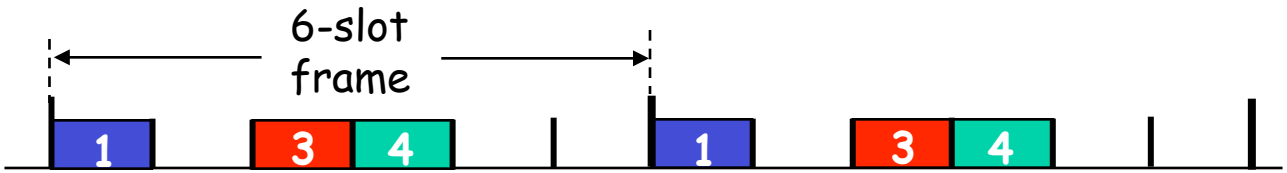

- GSM cellular uses an 8-slot TDM service model.
  - Global System for Mobile Communications (2G)

Channel Partitioning MAC protocols: TDMA

TDMA: time division multiple access

- access to channel in "rounds"
- each station gets fixed length slot (length = pkt trans time) in each round
- unused slots go idle
- example: 6-station LAN, 1,3,4 have pkt, slots 2,5,6 idle

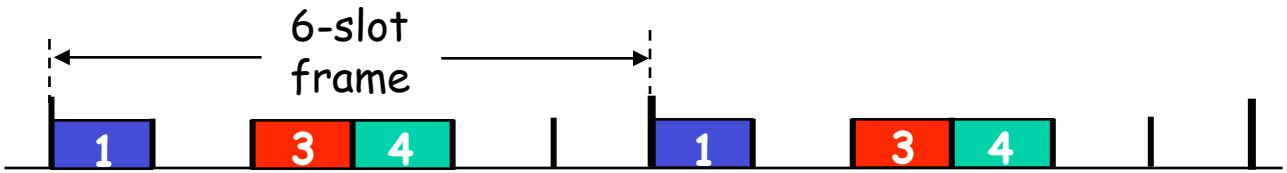

- R/N bandwidth (when everyone want it) but not R bandwidth when only one wants it. AND requires synchronized clocks! (Perfectly fair, but inefficient!)

Channel Partitioning MAC protocols: FDMA

FDMA: frequency division multiple access

- channel spectrum divided into frequency bands
- each station assigned fixed frequency band
- unused transmission time in frequency bands go idle
- example: 6-station LAN, 1,3,4 have pkt, frequency bands 2,5,6 idle

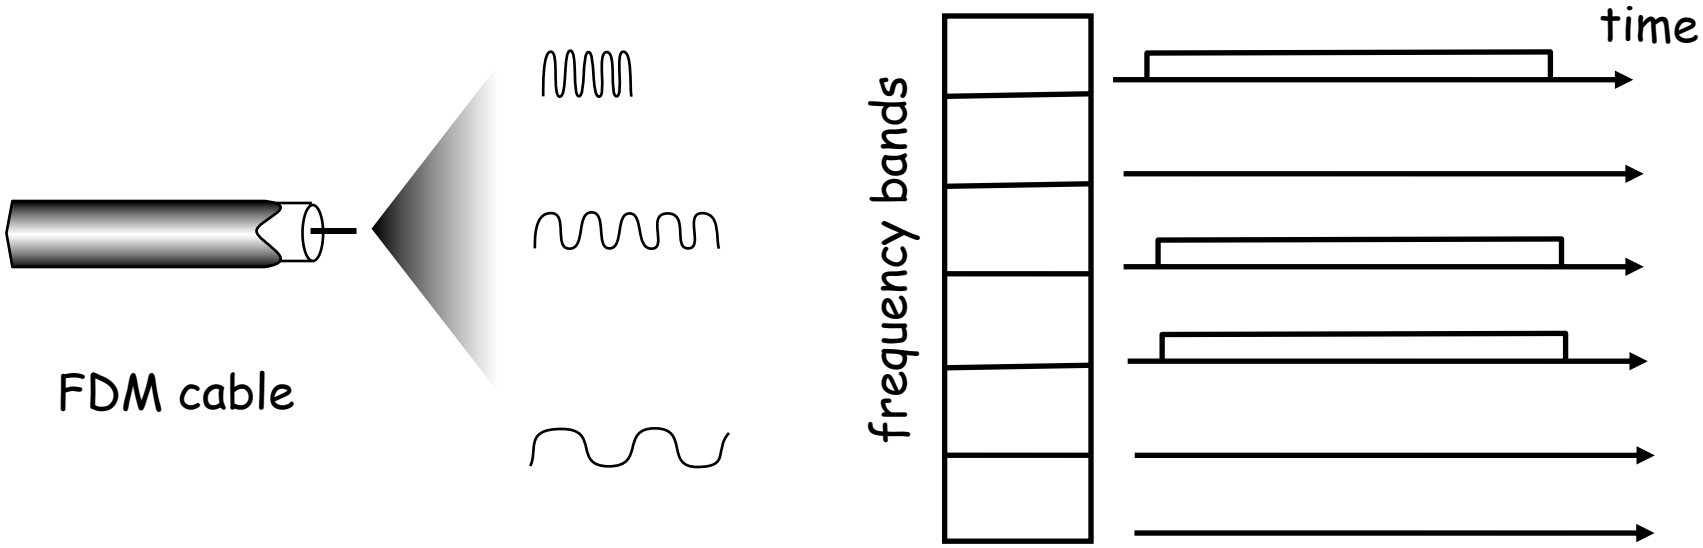

Random Access Protocols

- When node has packet to send
  - transmit at full channel data rate R.
  - no a priori coordination among nodes
- two or more transmitting nodes ➜ "collision",
- random access MAC protocol specifies:
  - how to detect collisions
  - how to recover from collisions (e.g., via delayed retransmissions)
- Examples of random access MAC protocols:
  - slotted ALOHA
  - ALOHA
  - CSMA, CSMA/CD, CSMA/CA

Slotted ALOHA



assumptions:

- all frames same size
- time divided into equal size slots (time to transmit 1 frame)
- nodes start to transmit only slot beginning
- nodes are synchronized
- if 2 or more nodes transmit in slot, all nodes detect collision

operation:

- when node obtains fresh frame, transmits in next slot
  - *if no collision:* node can send new frame in next slot
  - *if collision:* node retransmits frame in each subsequent slot with probability *p* until success

randomization – *why*?

Slotted ALOHA

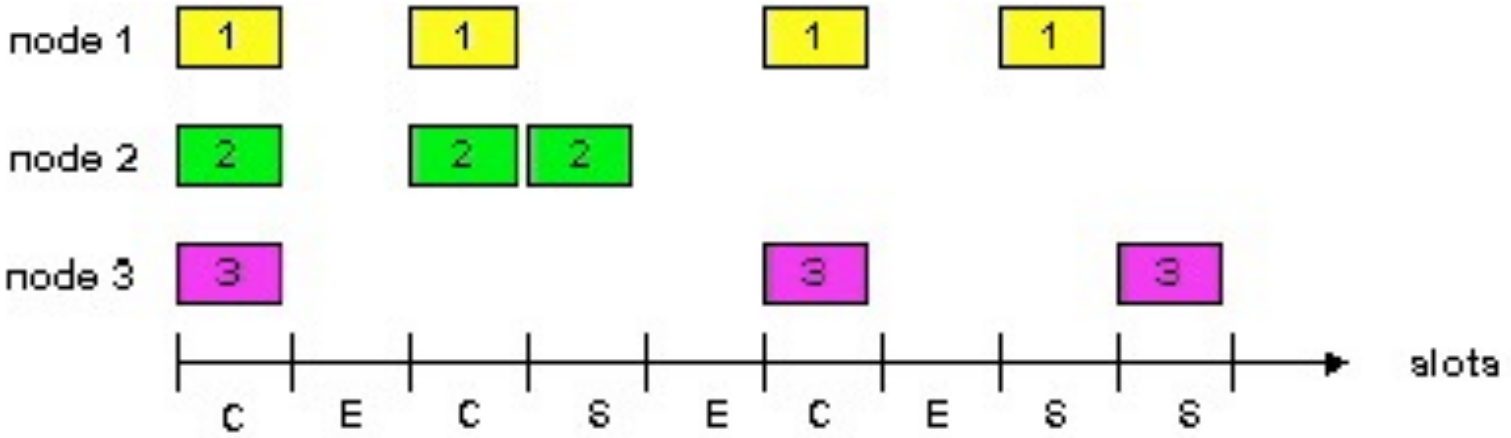

Pros

- single active node can continuously transmit at full rate of channel
- highly decentralized: only nodes in slot need to be in sync
- simple

Cons

- collisions, wasting slots
- idle slots
- nodes may not be able to detect collision in less than time to transmit packet
- clock synchronization

Slotted Aloha efficiency

Efficiency is the long-run fraction of successful slots when there are many nodes, each with many frames to send

- Suppose N nodes with many frames to send, each transmits in slot with probability p
- prob that node 1 has success in a slot = $p(1-p)^{N-1}$
- prob that any node has a success = $Np(1-p)^{N-1}$

- For max efficiency with N nodes, find p* that maximizes $Np(1-p)^{N-1}$ (it's $p = 1/N$)
- For many nodes, take limit of $Np^*(1-p^*)^{N-1}$ as N goes to infinity, gives $1/e = .37$

At best: channel used for useful transmissions 37% of time!

Pure (unslotted) ALOHA

- unslotted Aloha: simpler, no synchronization
- when frame first arrives
  - transmit immediately
- collision probability increases:
  - frame sent at t_0 collides with other frames sent in $[t_0-1, t_0+1]$

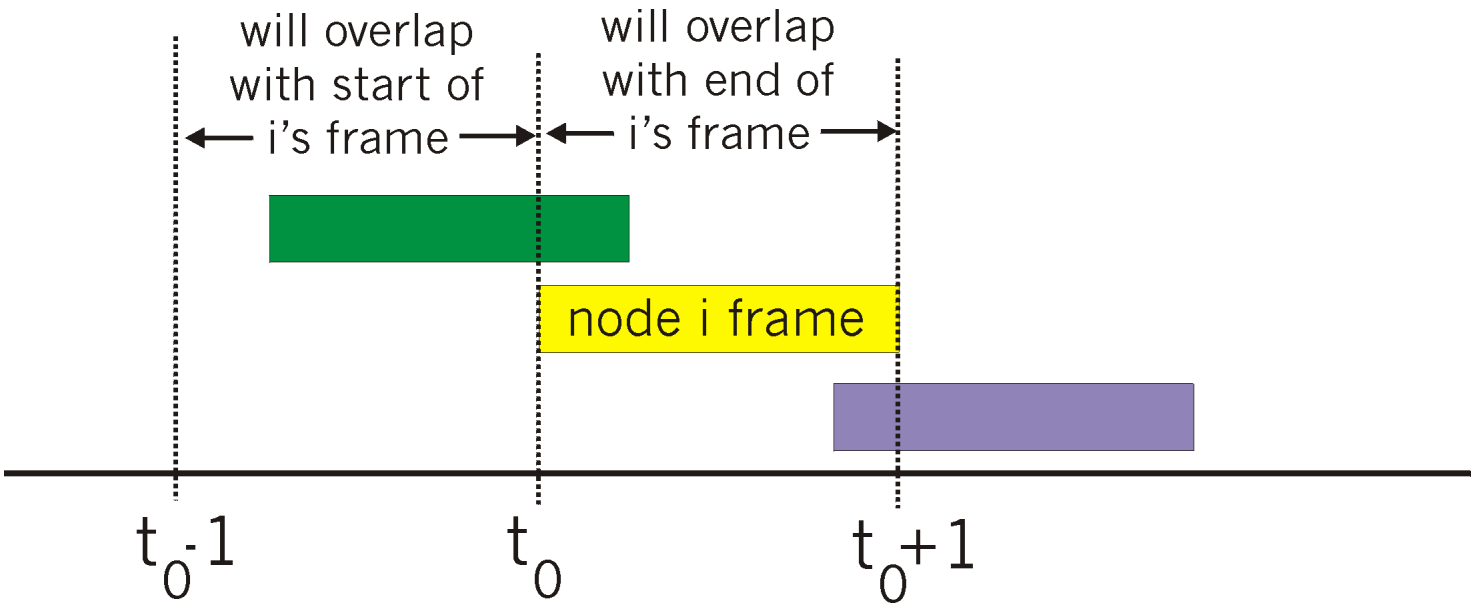

Pure Aloha efficiency

P(success by given node) = P(node transmits) ·

P(no other node transmits in $[t_0\text{-}1, t_0]$) ·

P(no other node transmits in $[t_0, t_0 + 1]$)

$= p \cdot (1\text{-}p)^{N-1} \cdot (1\text{-}p)^{N-1}$

$= p \cdot (1\text{-}p)^{2(N-1)}$

… choosing optimum p and then letting n -> infty ...

$= 1/(2e) = .18$

Even worse than slotted Aloha!

CSMA (Carrier Sense Multiple Access)

CSMA: listen before transmit:

If channel sensed idle: transmit entire frame

- If channel sensed busy, defer transmission

- Human analogy: don't interrupt others!

CSMA collisions

collisions can still occur:
propagation delay means two nodes may not hear each other's transmission

collision:
entire packet transmission time wasted

note:
role of distance & propagation delay in determining collision probability

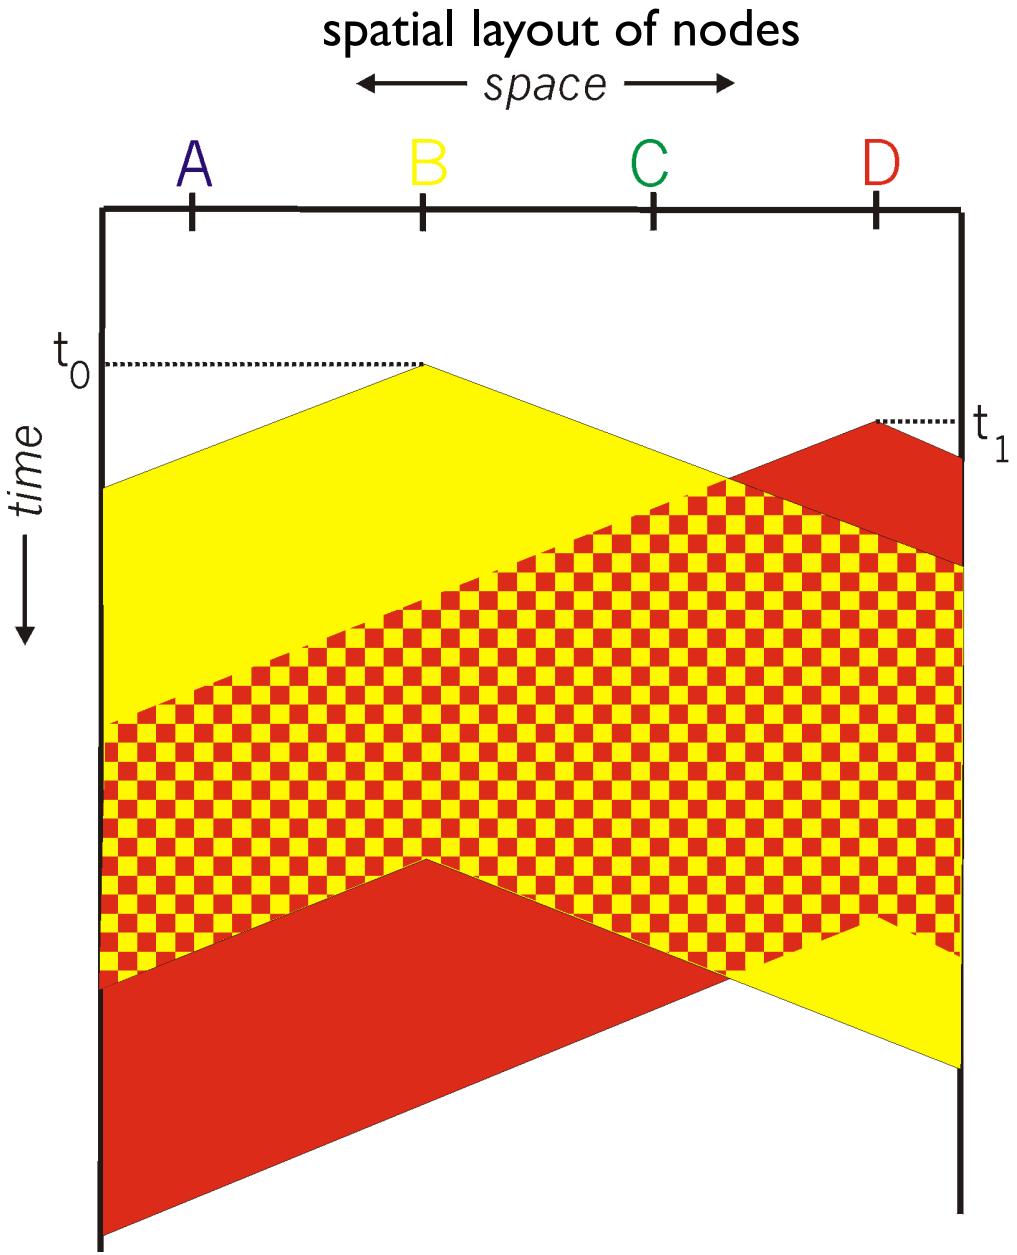

CSMA/CD (Collision Detection)

CSMA/CD: carrier sensing, deferral as in CSMA

- collisions detected within short time
- colliding transmissions aborted, reducing channel wastage

- collision detection:
  - easy in wired LANs: measure signal strengths, compare transmitted, received signals
  - difficult in wireless LANs: receiver shut off while transmitting
- human analogy: the polite conversationalist

CSMA/CD collision detection

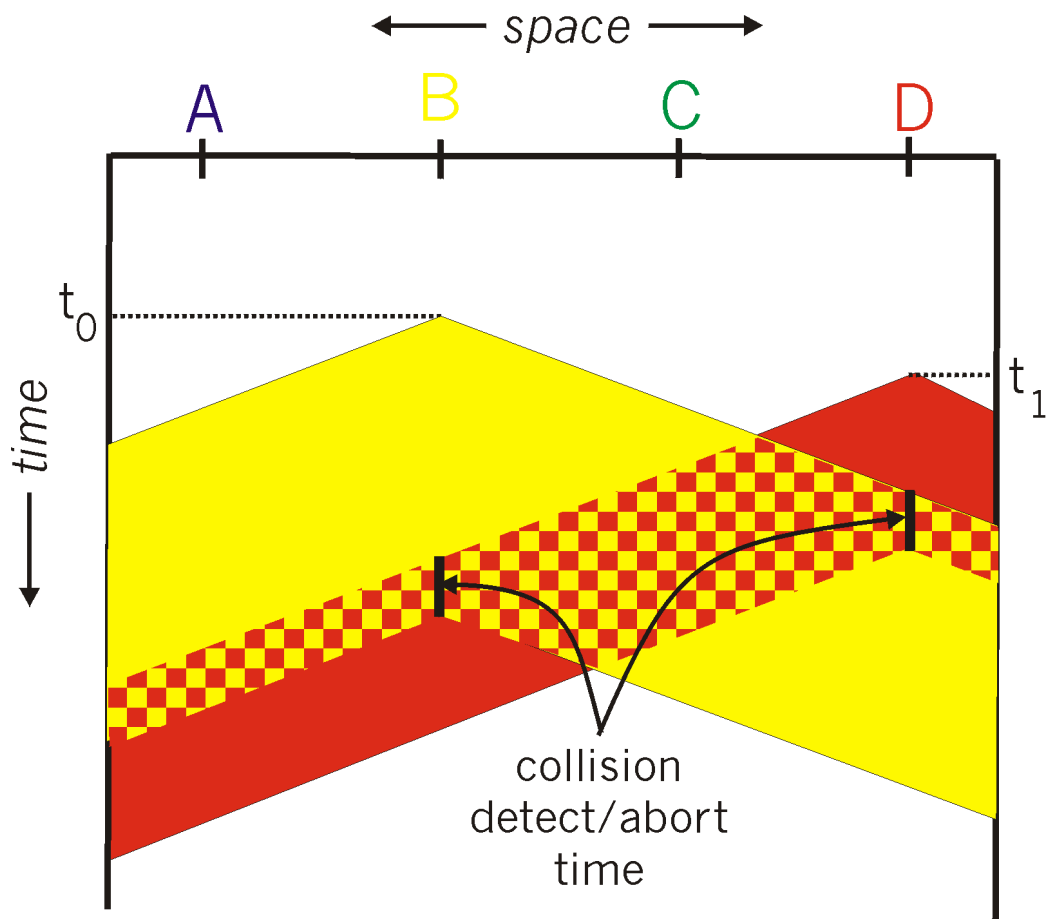

"Taking Turns" MAC protocols

channel partitioning MAC protocols:

- share channel efficiently and fairly at high load
- inefficient at low load: delay in channel access, 1/N bandwidth allocated even if only 1 active node!

Random access MAC protocols

- efficient at low load: single node can fully utilize channel
- high load: collision overhead

"taking turns" protocols

look for best of both worlds!

"Taking Turns" MAC protocols

Polling:

- master node "invites" slave nodes to transmit in turn
  - Please excuse outdated terminology
- concerns:
  - polling overhead
  - latency
  - single point of failure (master)

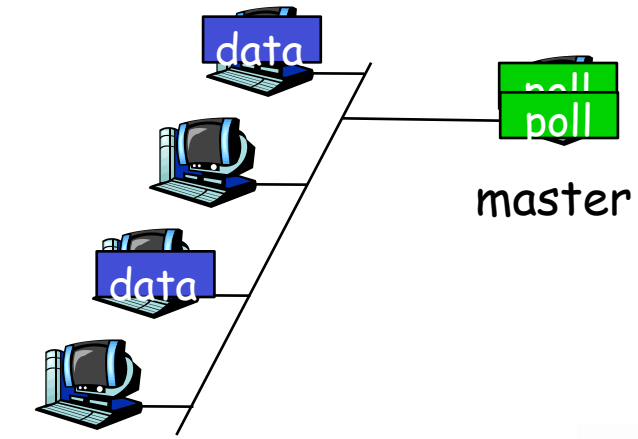

"Taking Turns" MAC protocols

- *Token passing:*
  - control token passed from one node to next sequentially.
  - token message
  - concerns:
    - token overhead
    - latency
    - single point of failure (token)

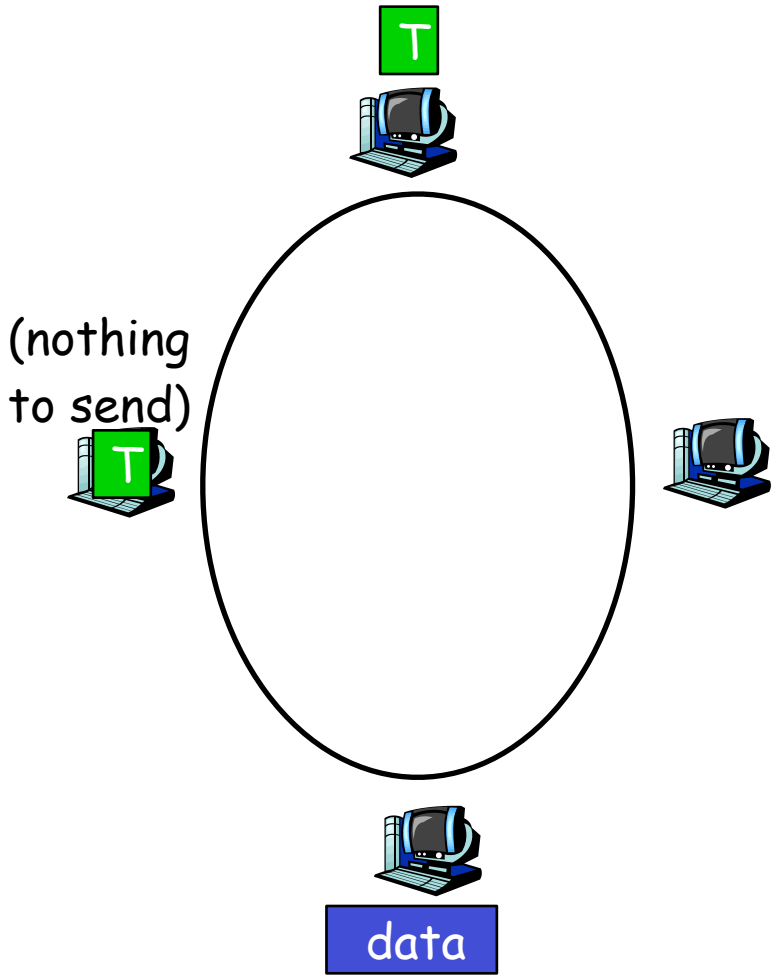

Summary of MAC protocols

- What do you do with a shared media?
  - Channel Partitioning, by time, frequency or code
    - Time Division, Frequency Division
  - Random partitioning (dynamic),
    - ALOHA, S-ALOHA, CSMA, CSMA/CD
    - carrier sensing: easy in some technologies (wire), hard in others (wireless)
    - CSMA/CD used in Ethernet
    - CSMA/CA used in 802.11
  - Taking Turns
    - polling from a central site, token passing

LAN technologies

Data link layer so far:

- services, error detection/correction, multiple access

Next: LAN technologies

- addressing
- Ethernet
- hubs, switches
- PPP