


# Fold-illuminator Assembly Instructions

Assembly video available at: <https://www.youtube.com/channel/UCoxTKNHAJlapybWZ8iRnKw>

## Preliminary Check


Make sure you have all the listed Illuminator components in your kit.

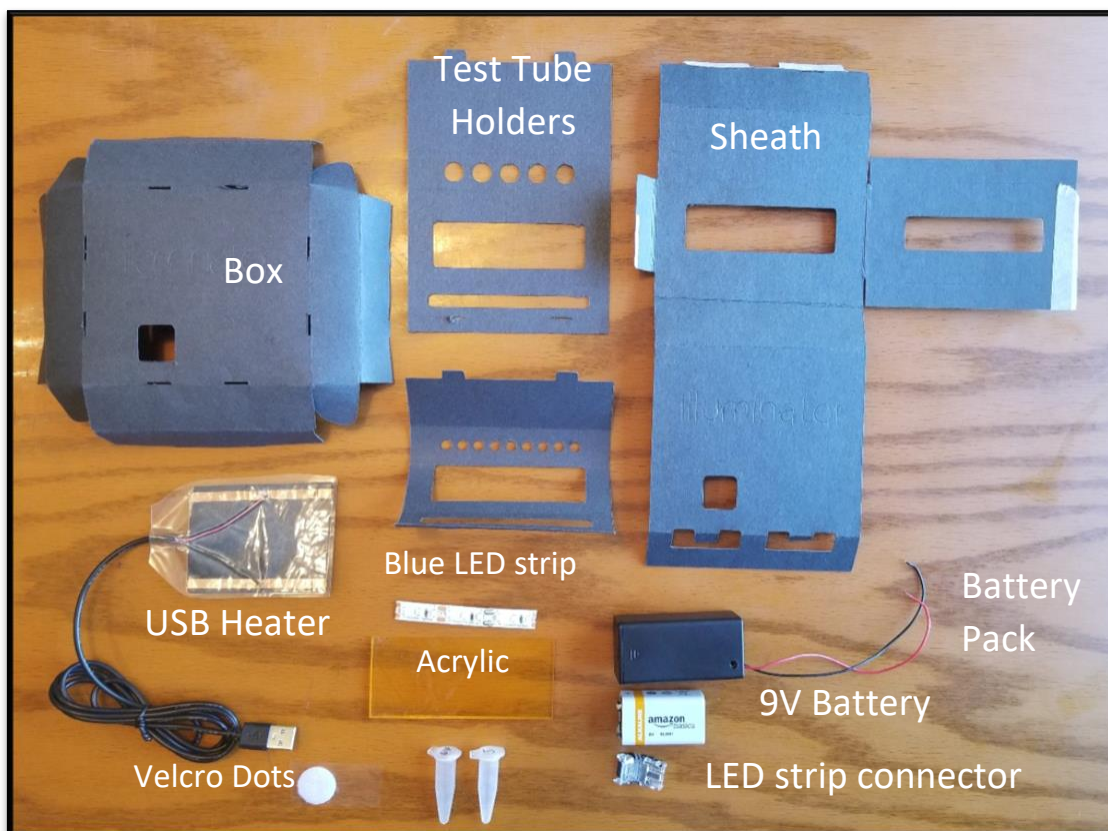


Description	Checklist
(1) Sheath Piece	
(1) Box Piece	
(1) Test Tube Holder, 0.6 mL (9-hole pattern)	
(1) Test Tube Holder, 2.0 mL (5-hole pattern)	
(1) LED Strip to Wire Connector	
(1) 4" x 2" Yellow Acrylic Filter	
(1) 9-Volt Battery	
(1) 9-Volt Battery Holder	
(1) Blue LED Light Strip	
(1) USB Heater Pad	
(2) Velcro Dot Pairs — Hook and loop tape (alternatively)	

# 1. Box Instructions


- 1.1 Take the box piece out of the kit. With the “Illuminator” indentation facing downwards and the **circled** cut-out in the bottom right-hand side as shown in the image, take a ruler or use a table or counter edge to make creases along the pre-scored lines on the paper. Crease along all of the **RED** lines towards you in the orientation shown.

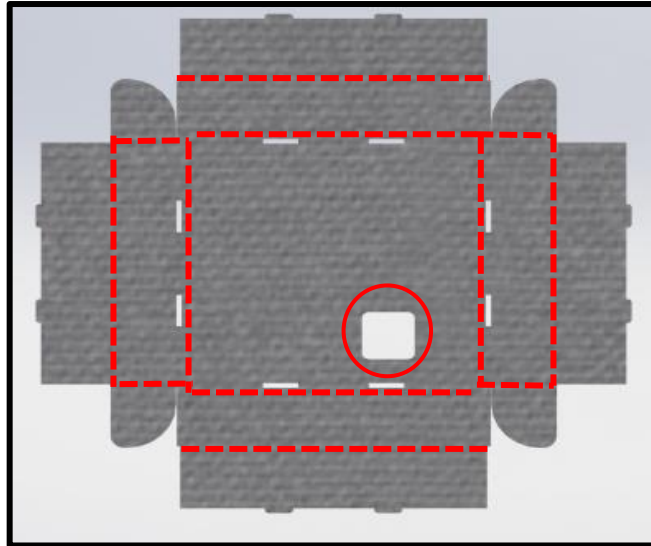


- 1.2 Next, lay the box piece flat with the side without the “Illuminator” indentation facing up. Orient the piece so the square cutout is on the bottom right, as shown in the image below. This orientation will be used when referencing the “top”, “bottom”, and “side” panels.

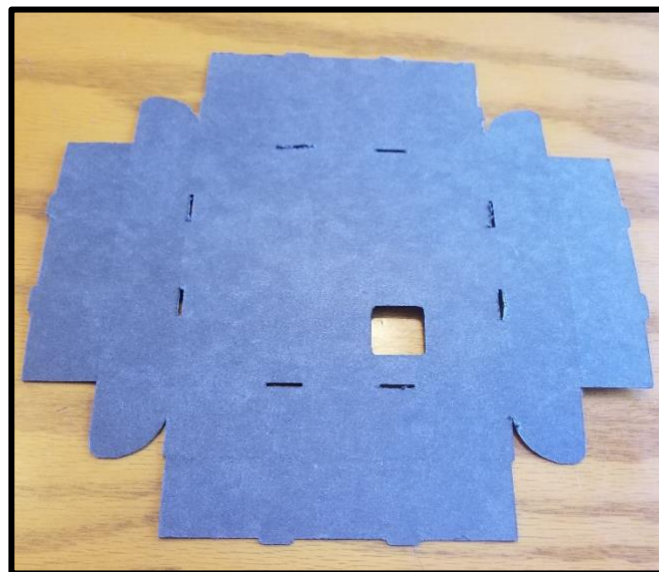


1.3 Fold the left and right panels along the scored lines closest to the center of the box, making the panels vertical.

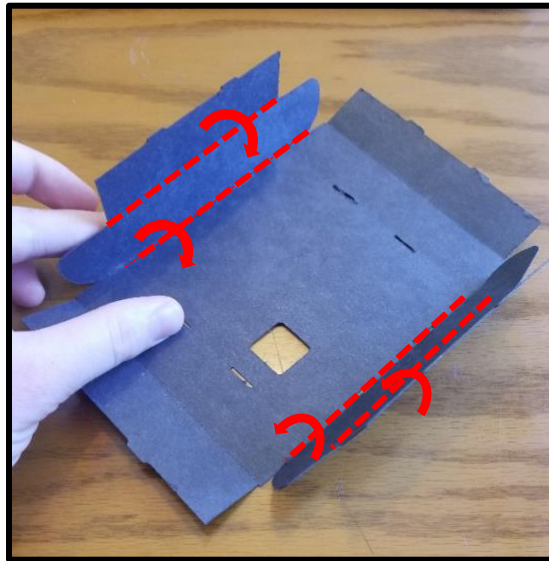


1.4 Fold the rounded tabs on both side panels inward so that the tabs and side panels form a 90° angle with the panels.

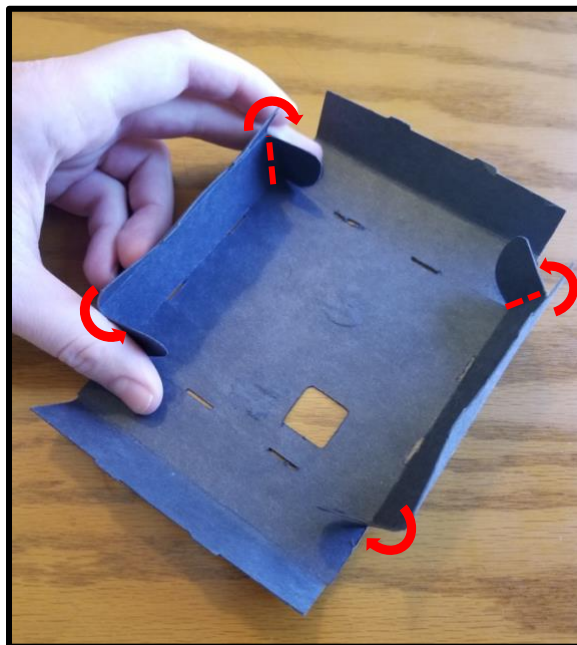


1.5 Fold the top and bottom panels upward along the scored lines closest to the center of the box.

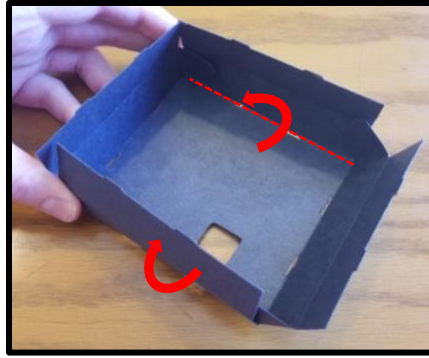

1.6 Fold the top and bottom panels at the crease in the middle over the rounded tabs on the side panels, inserting the small tabs at the panel's ends into the holes in the base of the box.

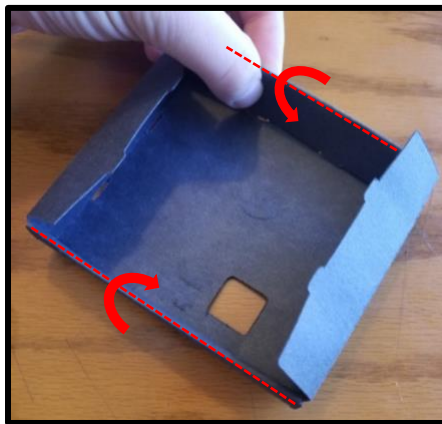



1.7 Fold the left and right side panels at the crease in the middle and down, inserting the small tabs at the ends into the holes in the base of the box. The box is now complete.

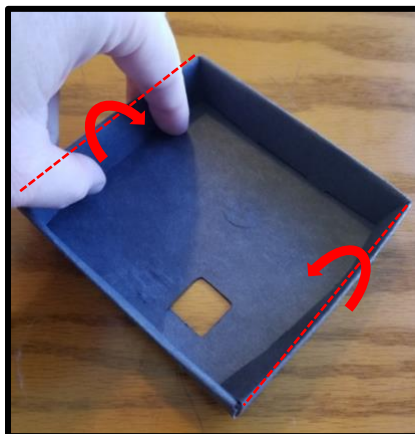

## 2. Test Tube Holder Instructions


2.1 Take out the small and large test tube holder pieces from the kit and orient them with the tabs pointing upwards, as shown below. Using the same method as before, crease all of the scored lines on the test tube holders inwards from the current view.

\*\*\* Be particularly careful folding along the crease with the narrow horizontal cutouts at the bottom of the holder. \*\*\*

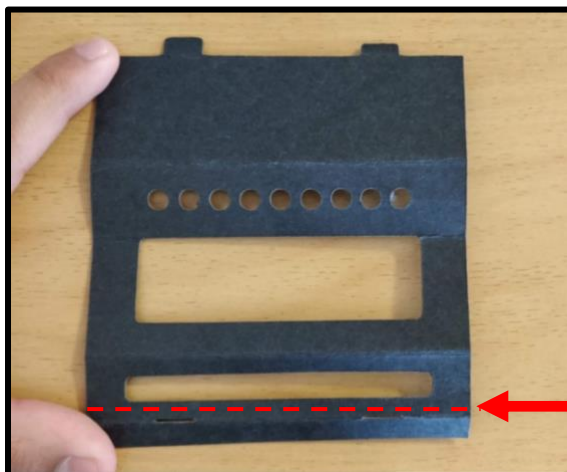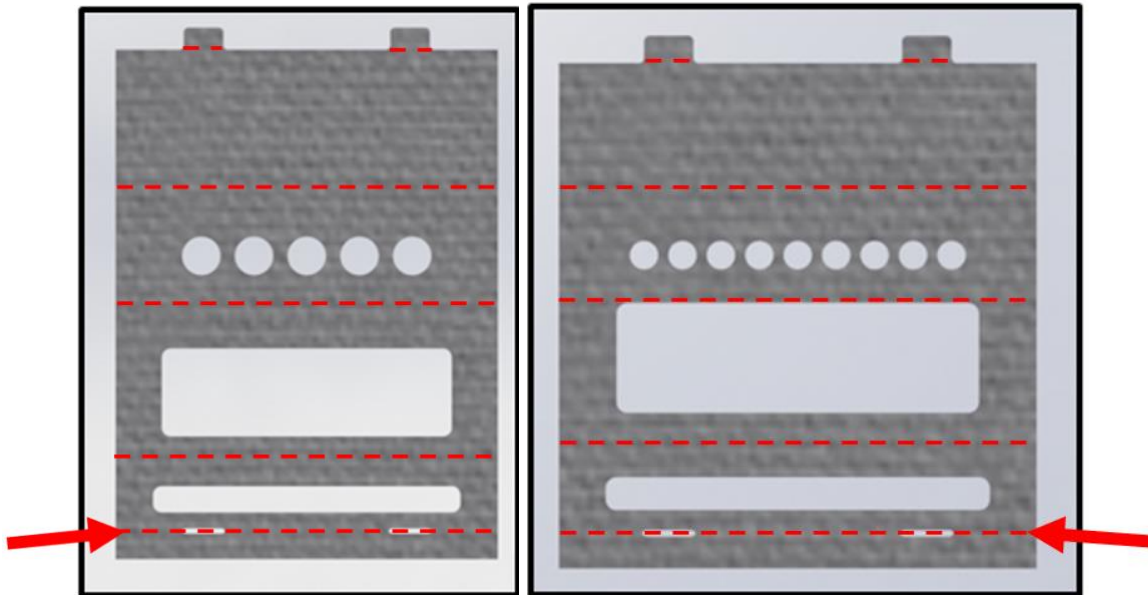



Once done, return the pieces to the orientation below, with the folds pointing away from you.



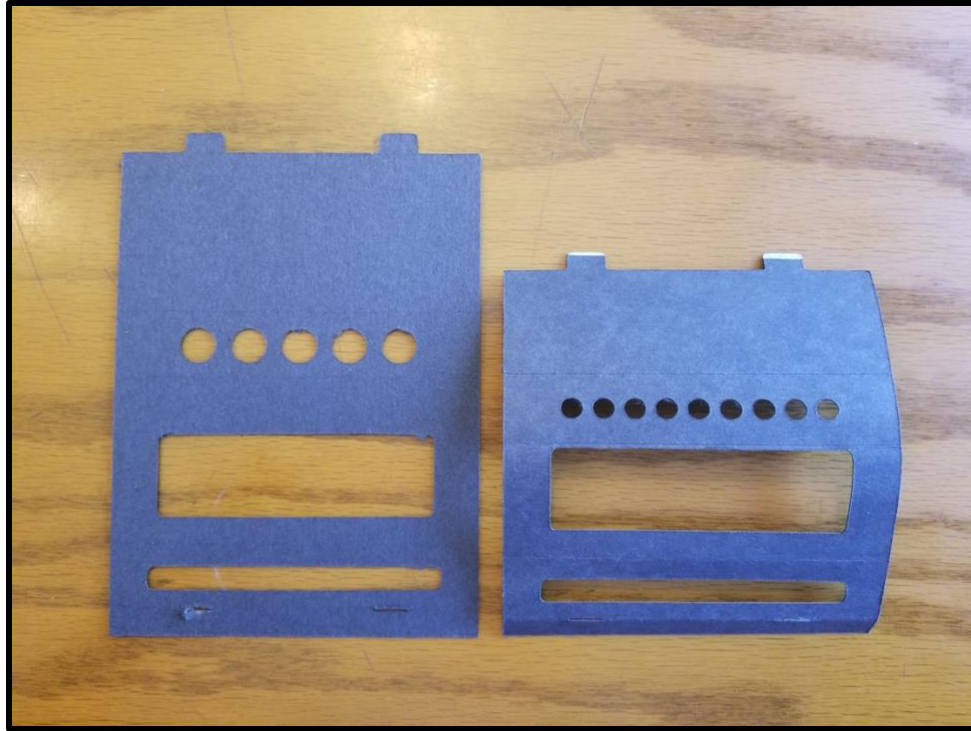

2.2 Fold the box around into a rectangular prism and insert the tabs from the top panel into the narrow horizontal slits at the bottom panel. Make sure to insert the tabs firmly into the slits until they are secure.



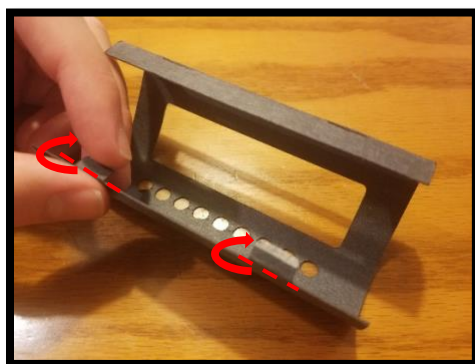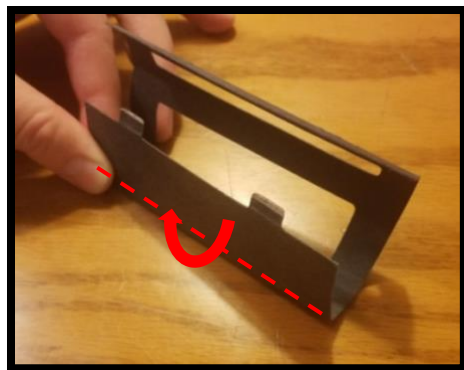


2.3 Assemble the other test tube holder in a similar manner; the test tube holders should be able to stand upright and have a rectangular box prism form when complete.



### 3. Sheath Instructions

3.1 Take out the Sheath piece from the kit. Place the sheath with the “Illuminator” indentation facing down and the light filter piece sticking out to the left, as shown in the image below. Crease along the pre-scored lines as before, folding **RED** lines towards you. Next, crease the **BLUE** lines away from you in the orientation shown.

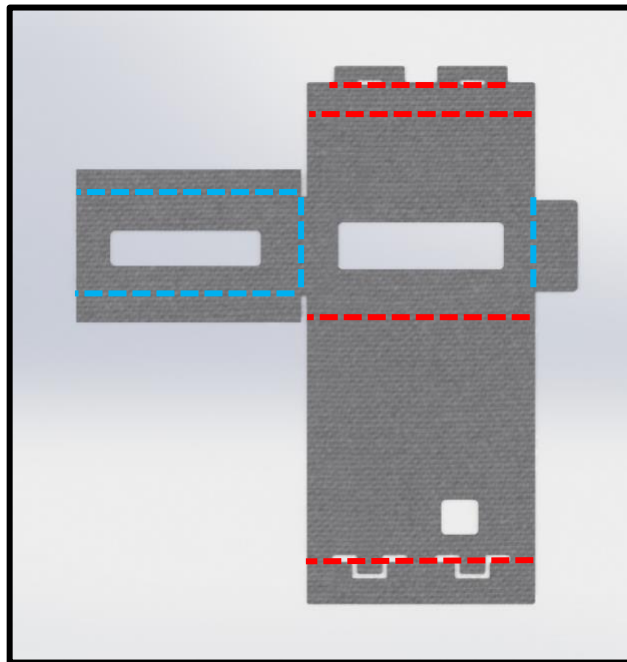


3.2 To assemble the sheath, position it in the unfolded position as shown so that the indented ‘Illuminator’ logo is facing downward and the light filter holder sticks out to the left.







3.3 Take the USB heater and Velcro dots from the kit. Attach a Velcro dot with “loops” (soft) onto the back of the USB heating element and place a Velcro dot with “hooks” (scratchy) on top of the other Velcro dot. Orient the heating element with the USB cable sticking to the right over the panel with the square cut-out, placing it slightly above the cut-out and centered on the panel.

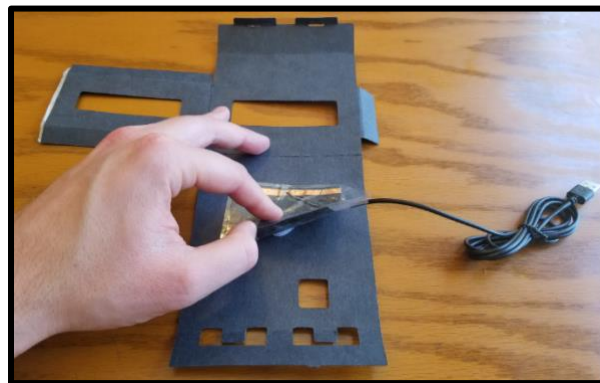


3.4 Fold along the scored line adjacent to the viewing window as shown so that the window is vertical.

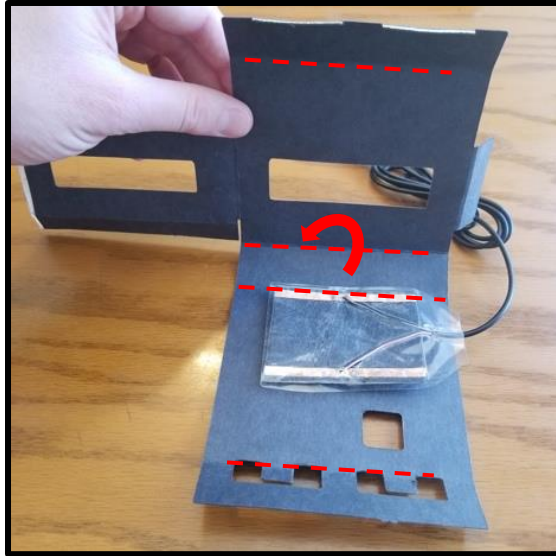


3.5 Fold along the horizontal **red** fold lines portrayed in step 3.1 so that the sheath closes with the small tabs on the base and top of the sheath close together as shown.

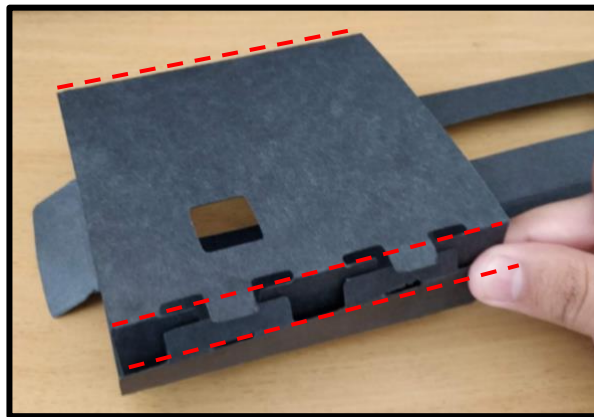


3.6 Insert the wider tabs into the opening as shown below.

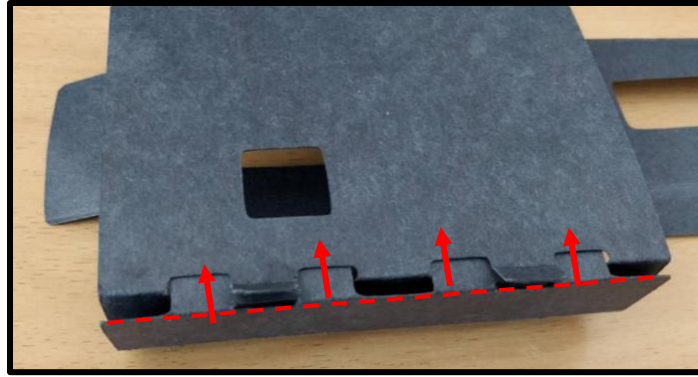


3.7 Now carefully insert the smaller tabs into the openings within the wider tabs as shown below.

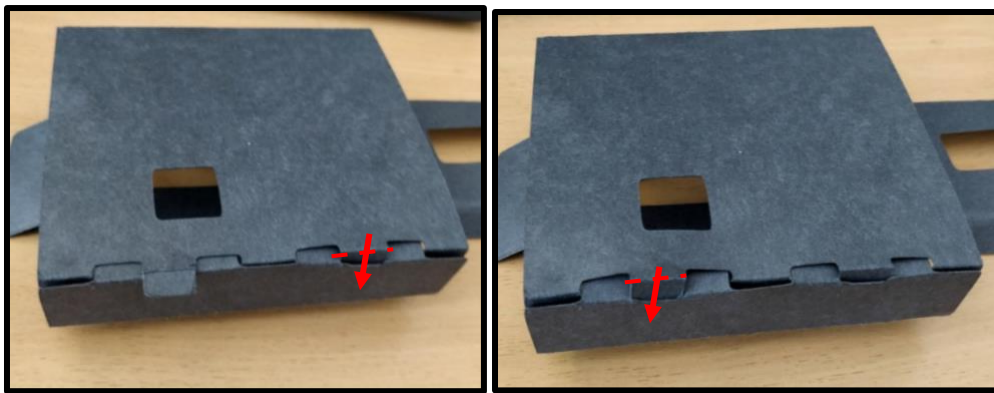


3.8 Push the tabs in further until they're fully secure.

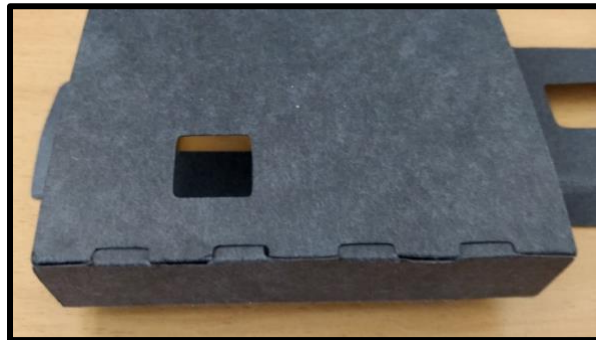


3.9 With the viewing window facing upright and the filter holder out to the left, fold the top and bottom creases on the filter holder. Take the yellow acrylic from the kit and slide it underneath the new top and bottom flaps on the filter holder, as shown below.

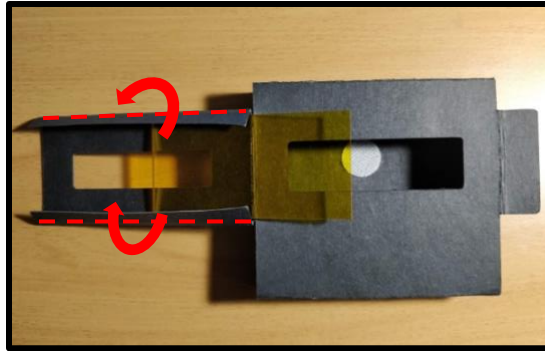

3.10 With the filter fully inserted, flip the filter holder over the viewing window, as shown in the image at lower left. Then insert the side tab into the filter holder in the space front of the acrylic.

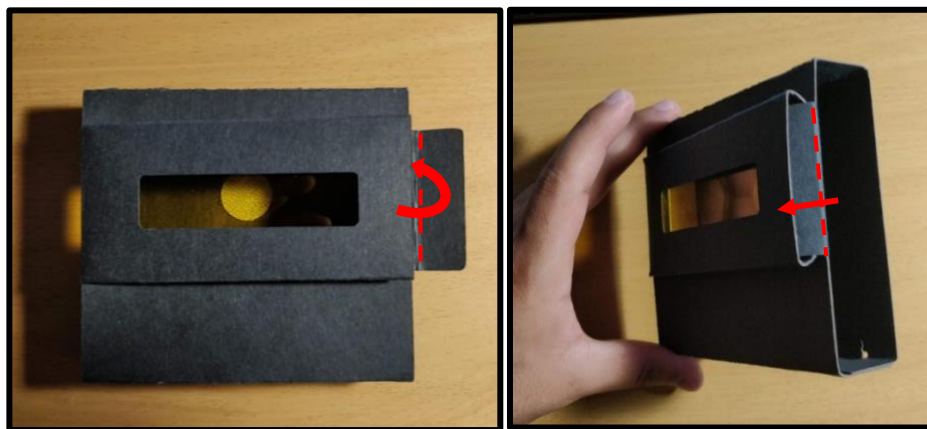

3.11 Pinch along the folds of the filter holder and push the filter further to the left until it sits firmly in place.

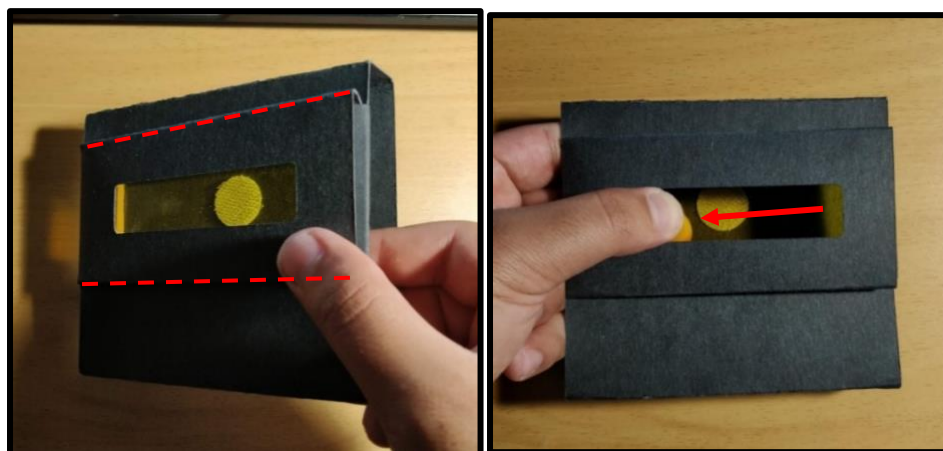

## 4. Electrical Circuit Assembly

4.1 Take all remaining components out of kit, which should include the 9-Volt battery, battery pack, LED strip, LED to wire connector, and two Velcro dot pairs.

4.2 Ensure the “ON/OFF” slider is on “OFF”. Remove cover from battery pack, insert the 9-Volt battery with the proper terminal orientation as shown. It may take some force to snap the battery into place.




4.3 Remove the red backing from the adhesive tape from underneath the LED strip.

\*\*\* Beware of the sharp corners of LED strip. \*\*\*

Orient the battery case so the power button is facing away from you and the wires are coming out of the bottom right side. Place the adhesive of the LED strip on the top of the battery pack as shown, with the positive (+) side of the LED strip aligned with the back edge of the battery case (side with the power switch) and the end of the strip aligned with the left side (side without the wires).

\*\*\*Ensure the strip does not block the removable battery lid. Once you confirm that it's not blocked, slide in the battery holder cover.\*\*\*

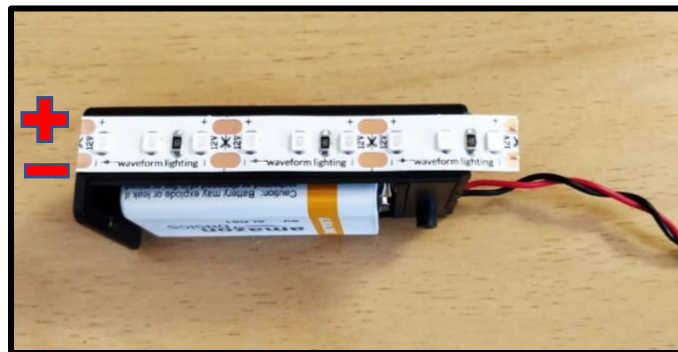




4.4 Use your nails to scratch off adhesive from the hanging portion of LED strip. Remove enough of the adhesive (about 1 cm) so there isn't any under the copper leads of the strip.



4.5 Flip the cap on the LED to wire connector up until you can completely see the sharp metal leads on the LED strip side. The side with two semicircular indentations in the base is for the wires, and the side with the flat base is for the LED strip, which is shown below.




4.6 Insert the hanging end of the LED strip into the connector's LED side, positioning the shiny copper terminals on the LED strip over the metal pins in the connector. This is important, as the pin and LED copper terminal connection will provide battery power to the lights. The pins in the connector should create indentations in the copper LED terminals.

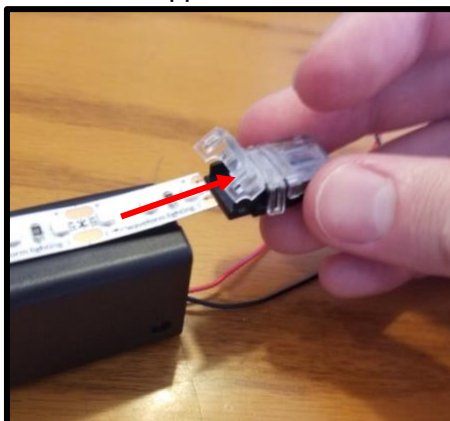


4.7 Ensure that the strip is not too far into the connector and the last LED is clear of the tab on the connector cap before slowly closing the cap. Ideally, the clear cap should snap into place once closed.



4.8 Turn the opposing white cap up vertically until you see the metallic “V” wire connectors.

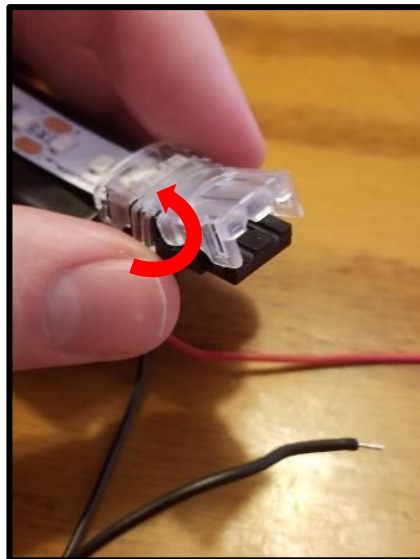

4.9 Insert wires into connector opening so that they rest on the metallic “V” grooves inside the connector. Make sure that the red wire is on the same side of the LED strip that indicates a positive (+) sign (RIGHT). Similarly, the black wire should be on the side of the negative (-) sign on the LED (LEFT).

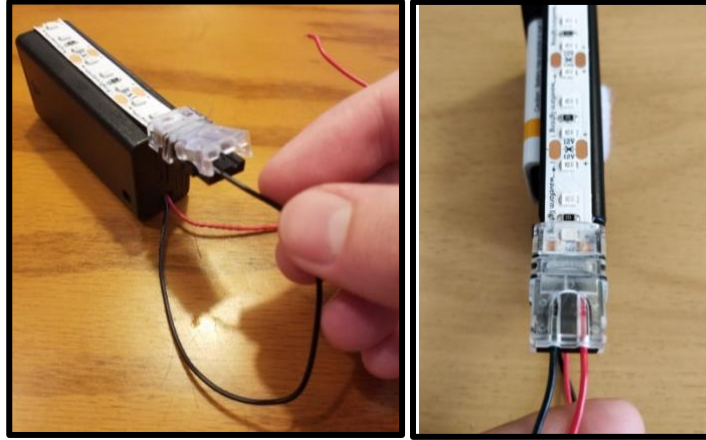

4.10 Once wires are lined up within their respective grooves, close the cap until it snaps into place.



4.11 Once wires are lined up within their respective channel, make sure the metal part of the wire will come into contact with the metal in the channel, or else the lights will not work. When in place, snap the cap down over the wires.

4.12 Turn on the power button at the back of the battery case to test the lighting.

NOTE: To avoid discomfort due to bright LEDs, point the LEDs away from your eyes when turning them on.



**TROUBLESHOOTING:** In case the lights do not turn on, do the following

1. Redo the connection between the LED strip and Connector
2. Check the wires and LED strip polarity. Ensure that (+) lines up with the Red wire and (-) lines up with Black.
3. Check the battery connection and polarity. Ensure that the leads properly snap into the leads of the battery housing.

4.13 Attach a Velcro dot with “loops” (soft) behind the switch on the side of the battery pack with the switch. Then place a Velcro dot with “hooks” (scratchy) on top of it, as shown. Hook and loop tape can be used as well.



4.14 Line up the power switch on the battery with the cut-out hole at the bottom of the box. Then attach the battery pack and test tube rack to the inside of the box as shown.



4.15 Finally, slide the box into the sheath. The Illuminator is complete!

