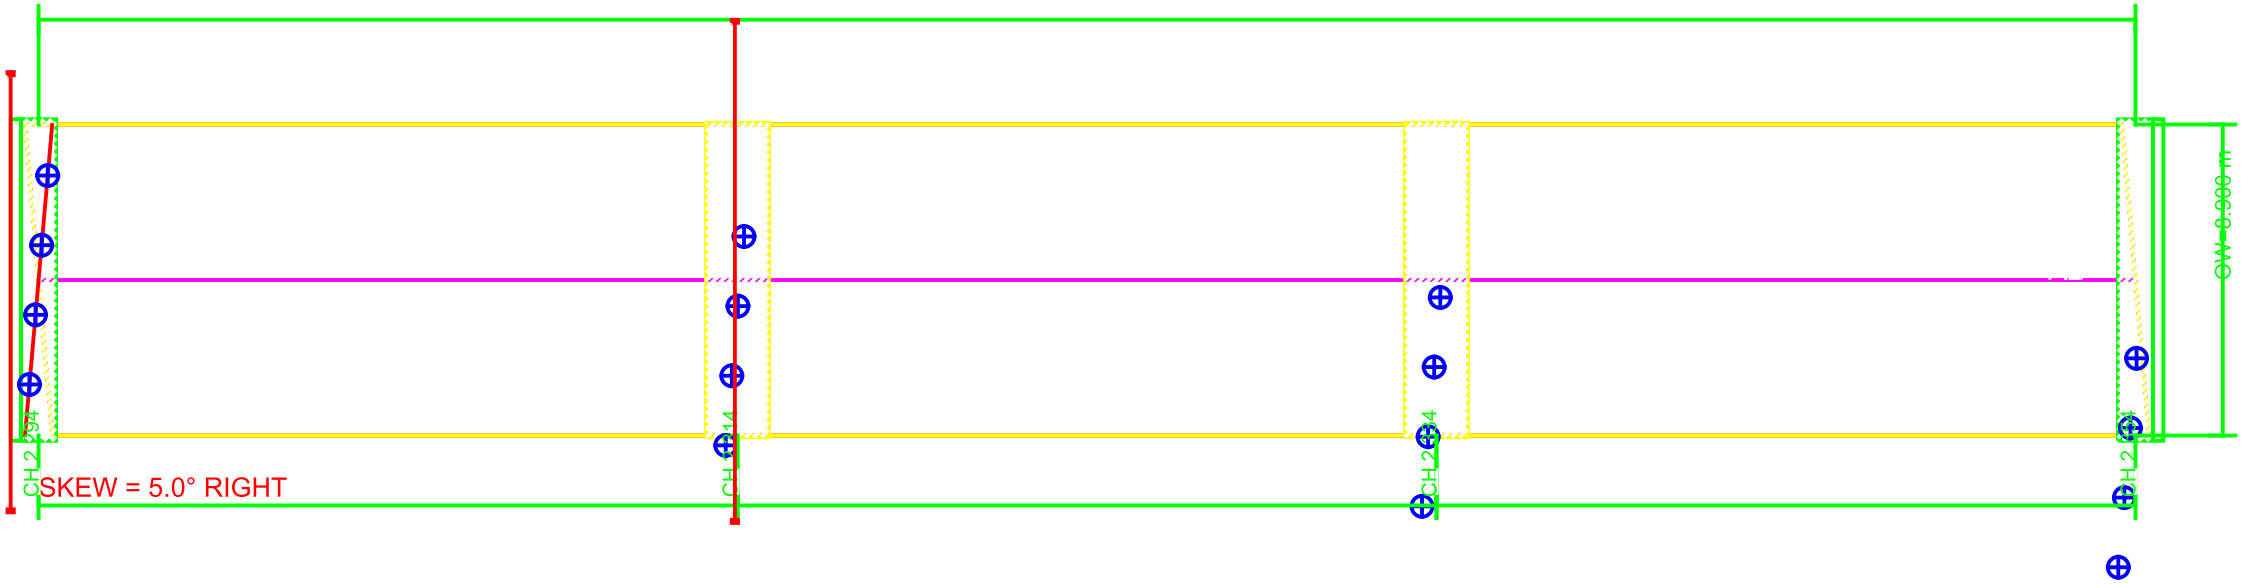

B-B

(Not to Scale – Indicative 1:100)

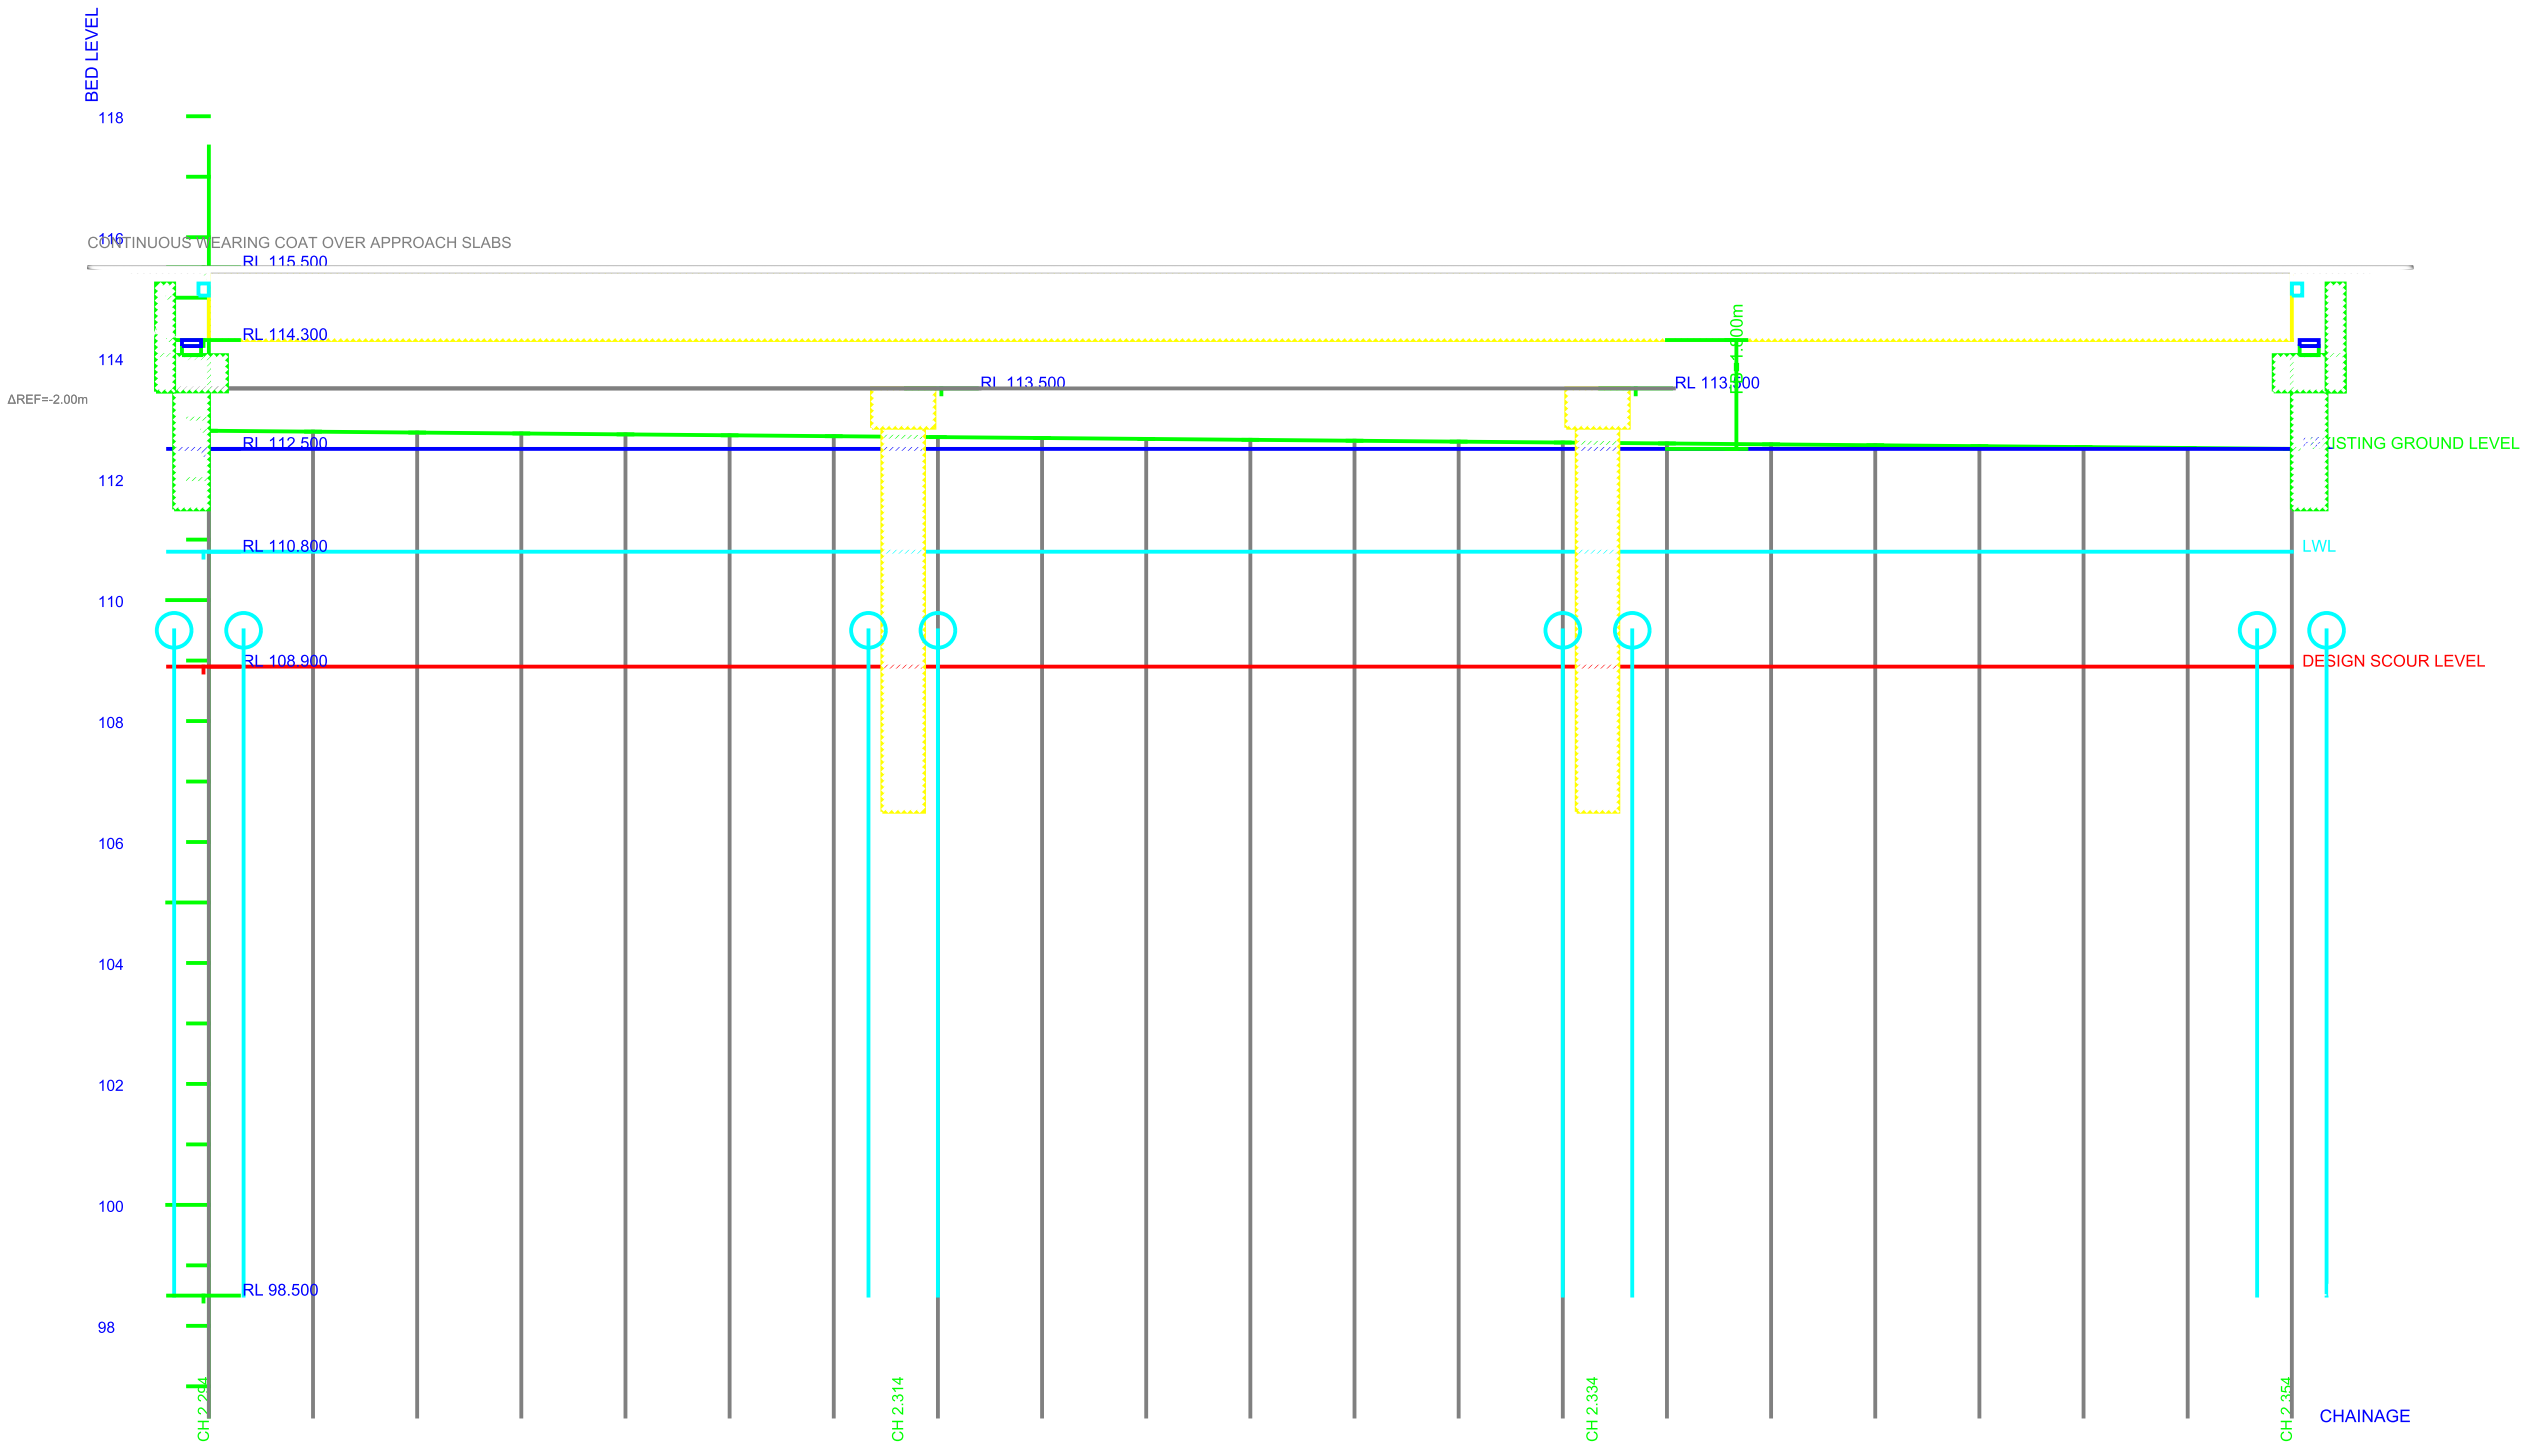

(Not to Scale — indicative)

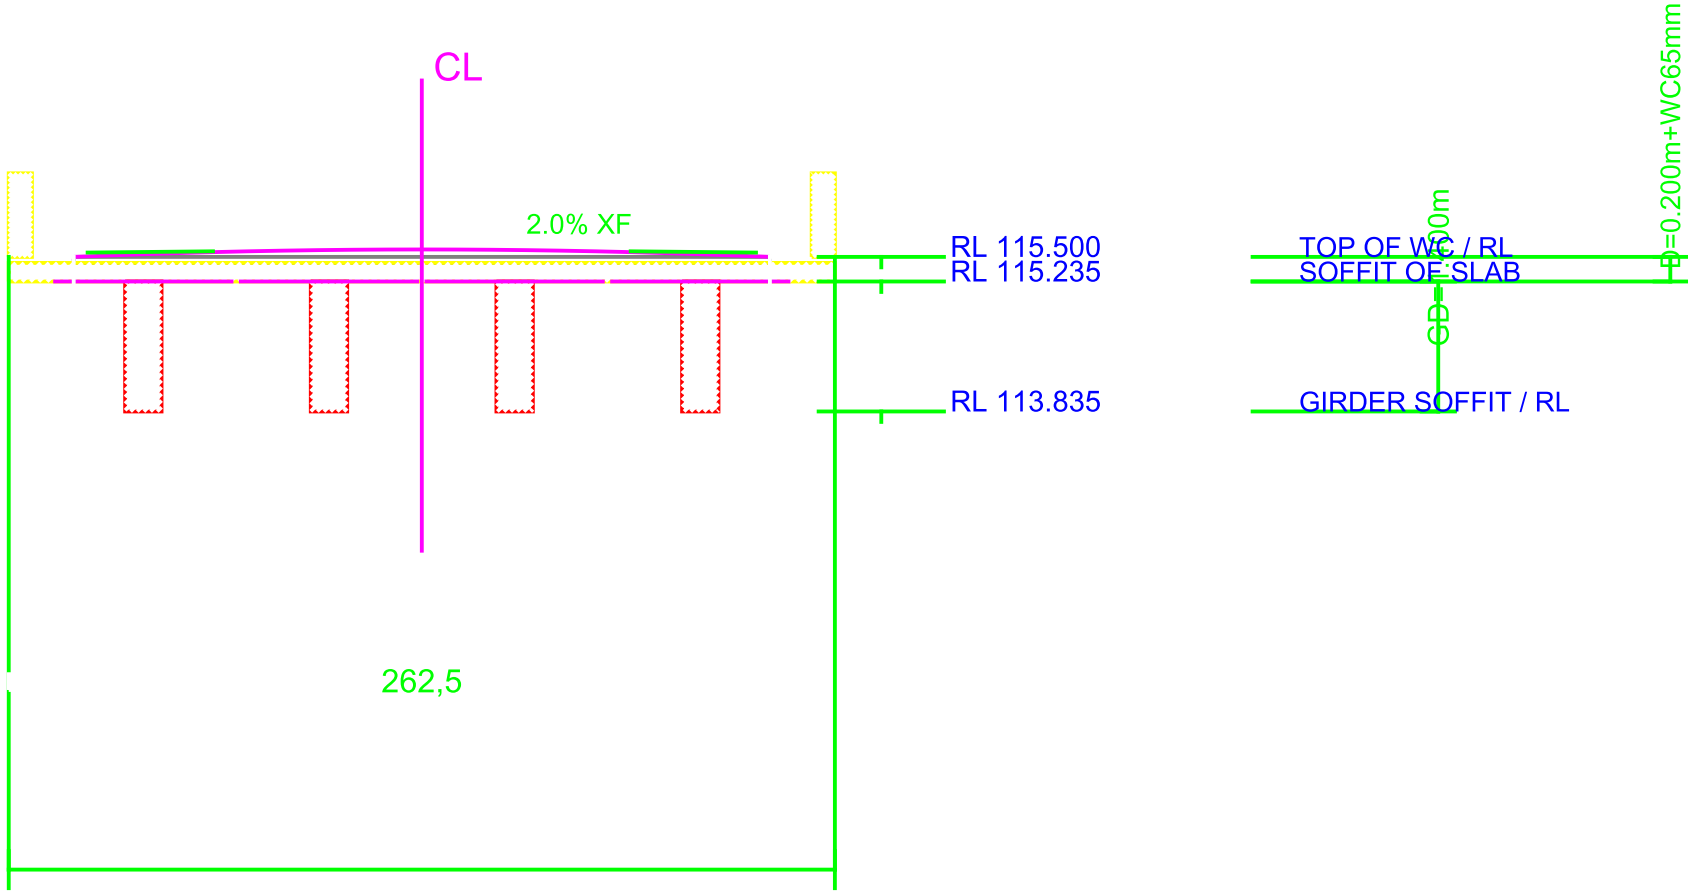

[illegible] mm (IRC:112 Cl.6.5)

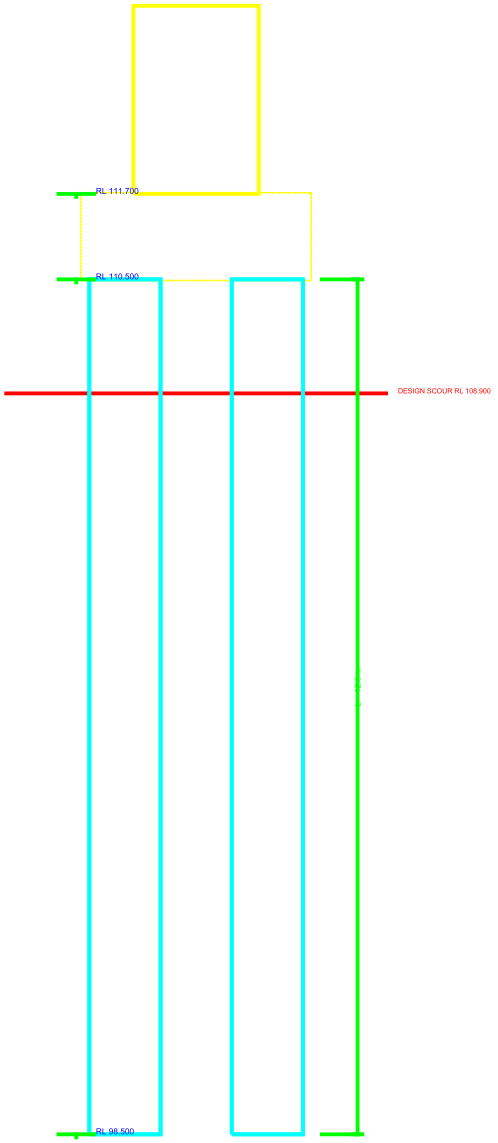
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
RL 98.500











QA-ABT-CAP-DEF	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PRO	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK



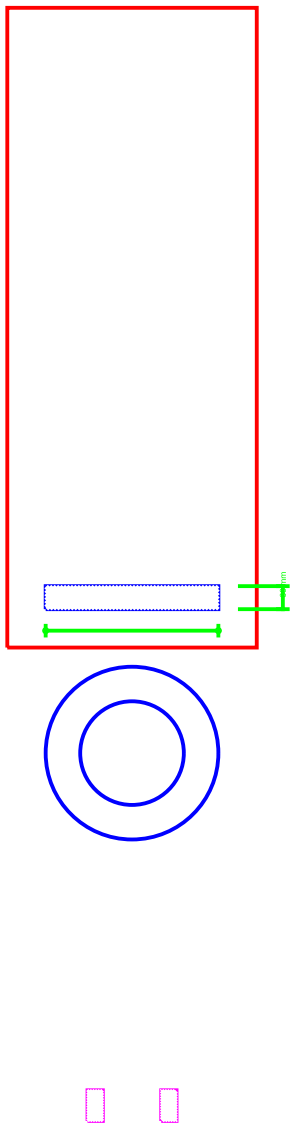
GAP

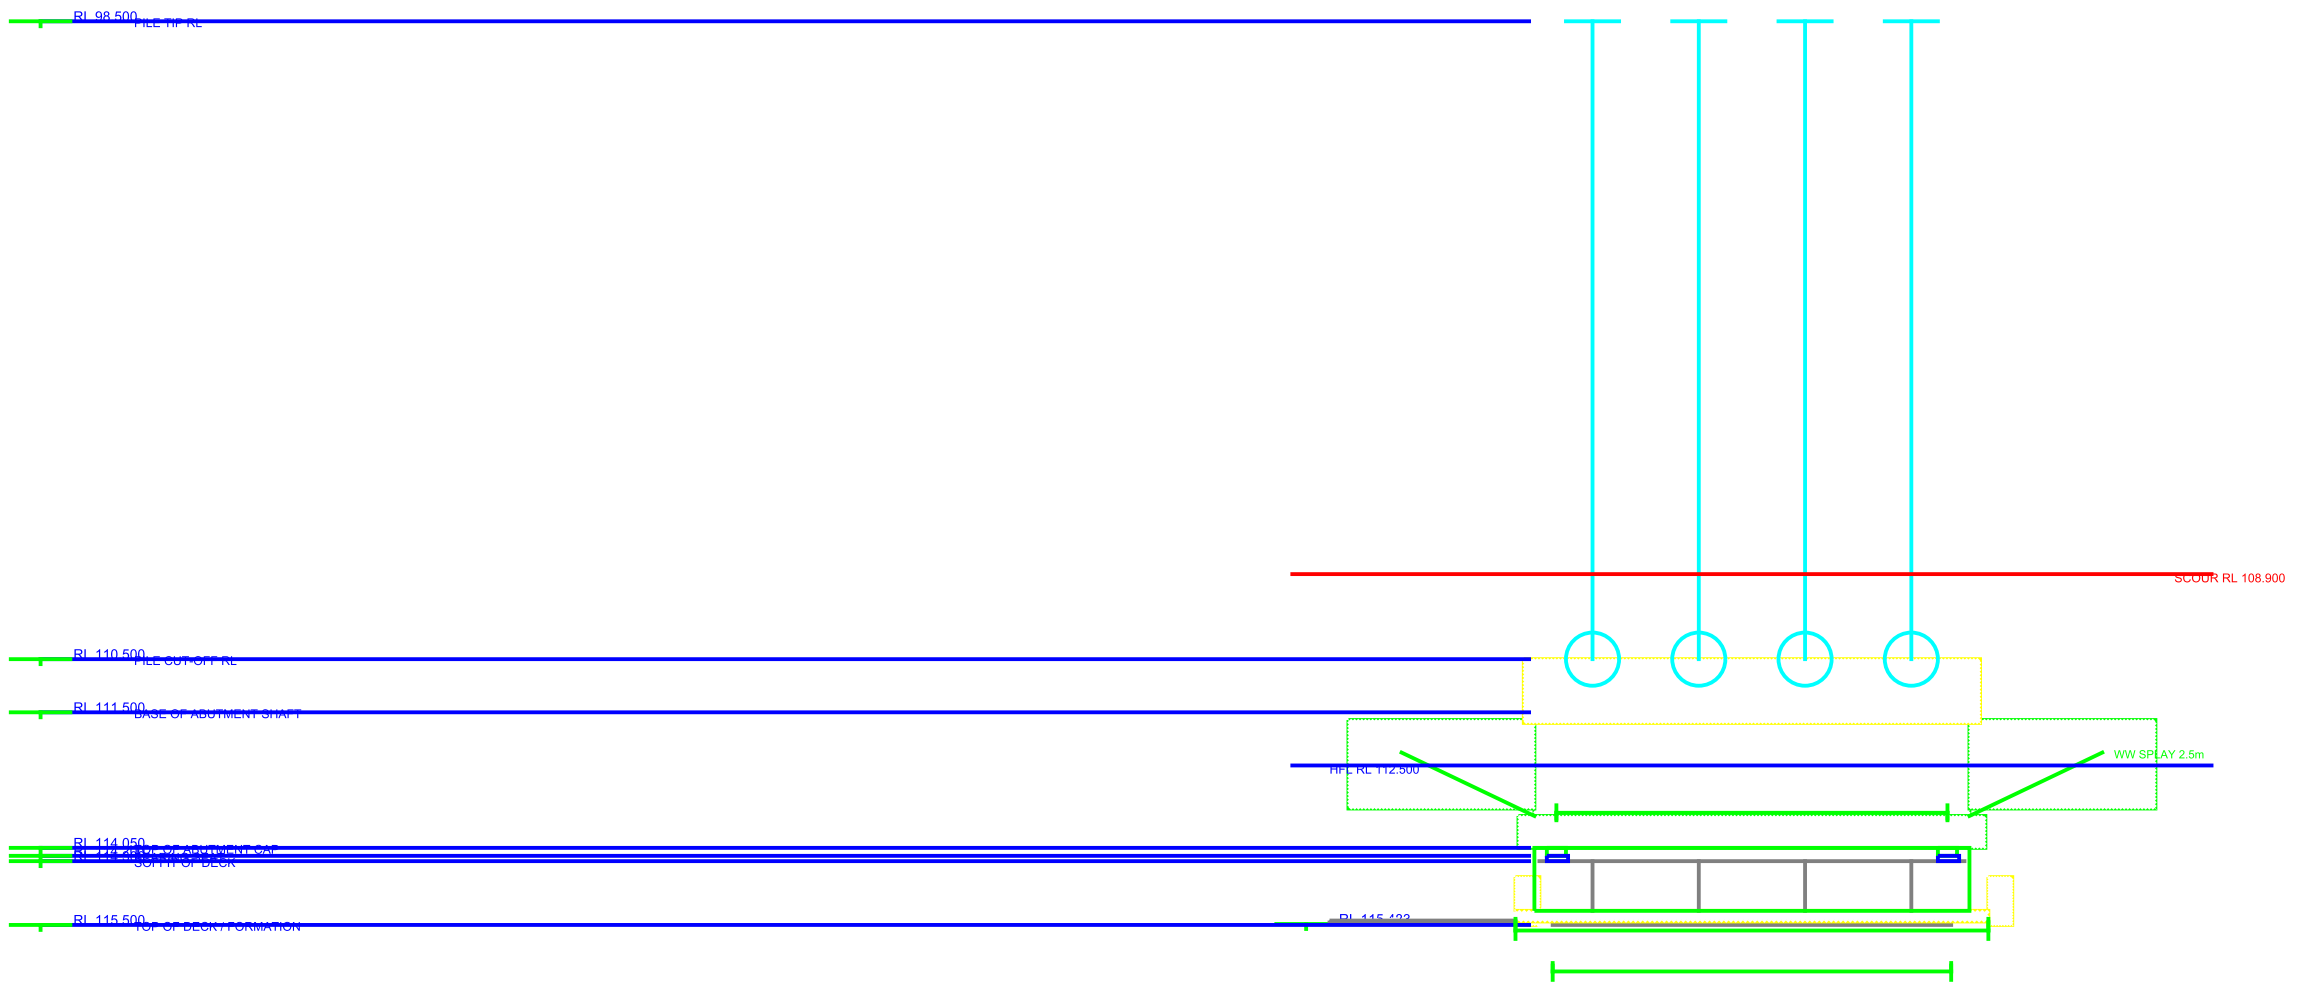

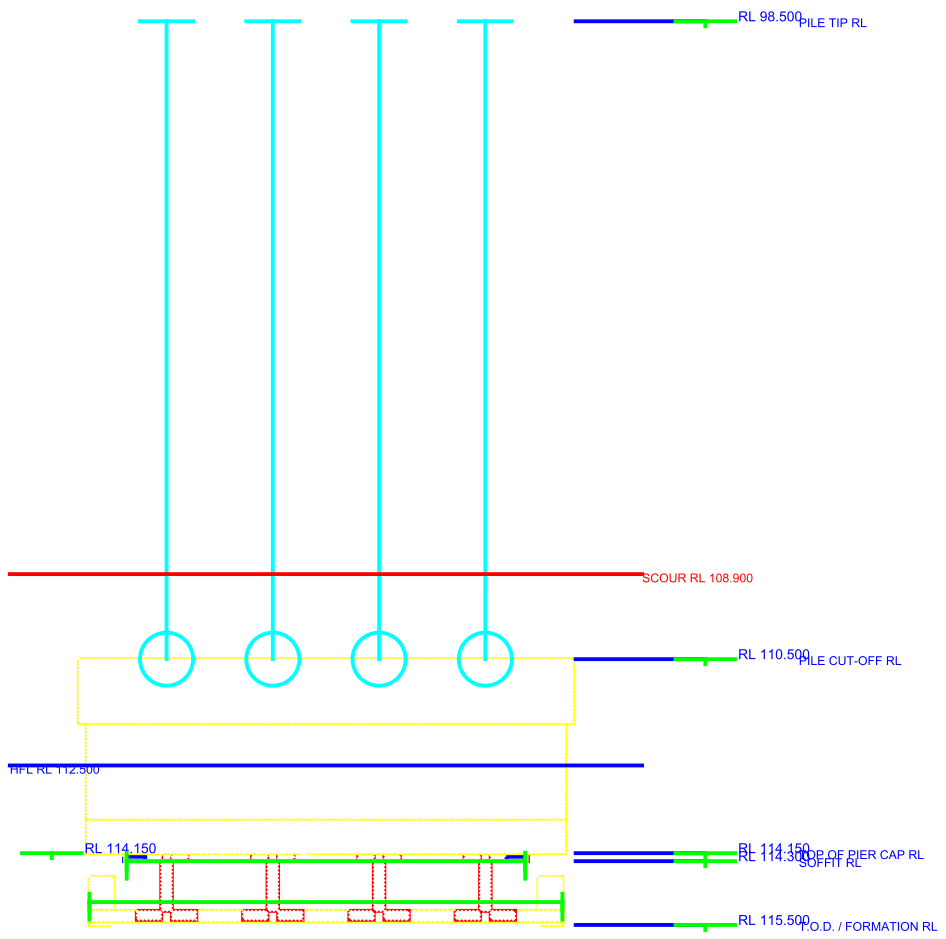

QA-ABT-C	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-C	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-TI	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-T(	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-W	Weep holes provided	4	1 per 3 m	OK
QA-ABT-C	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-S	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-B	Base pressure	159.91 kPa	<= 350.00 kPa	OK

(Not to Scale — indicative) PIER (BEYOND)