

B-B (Scale 1:100)

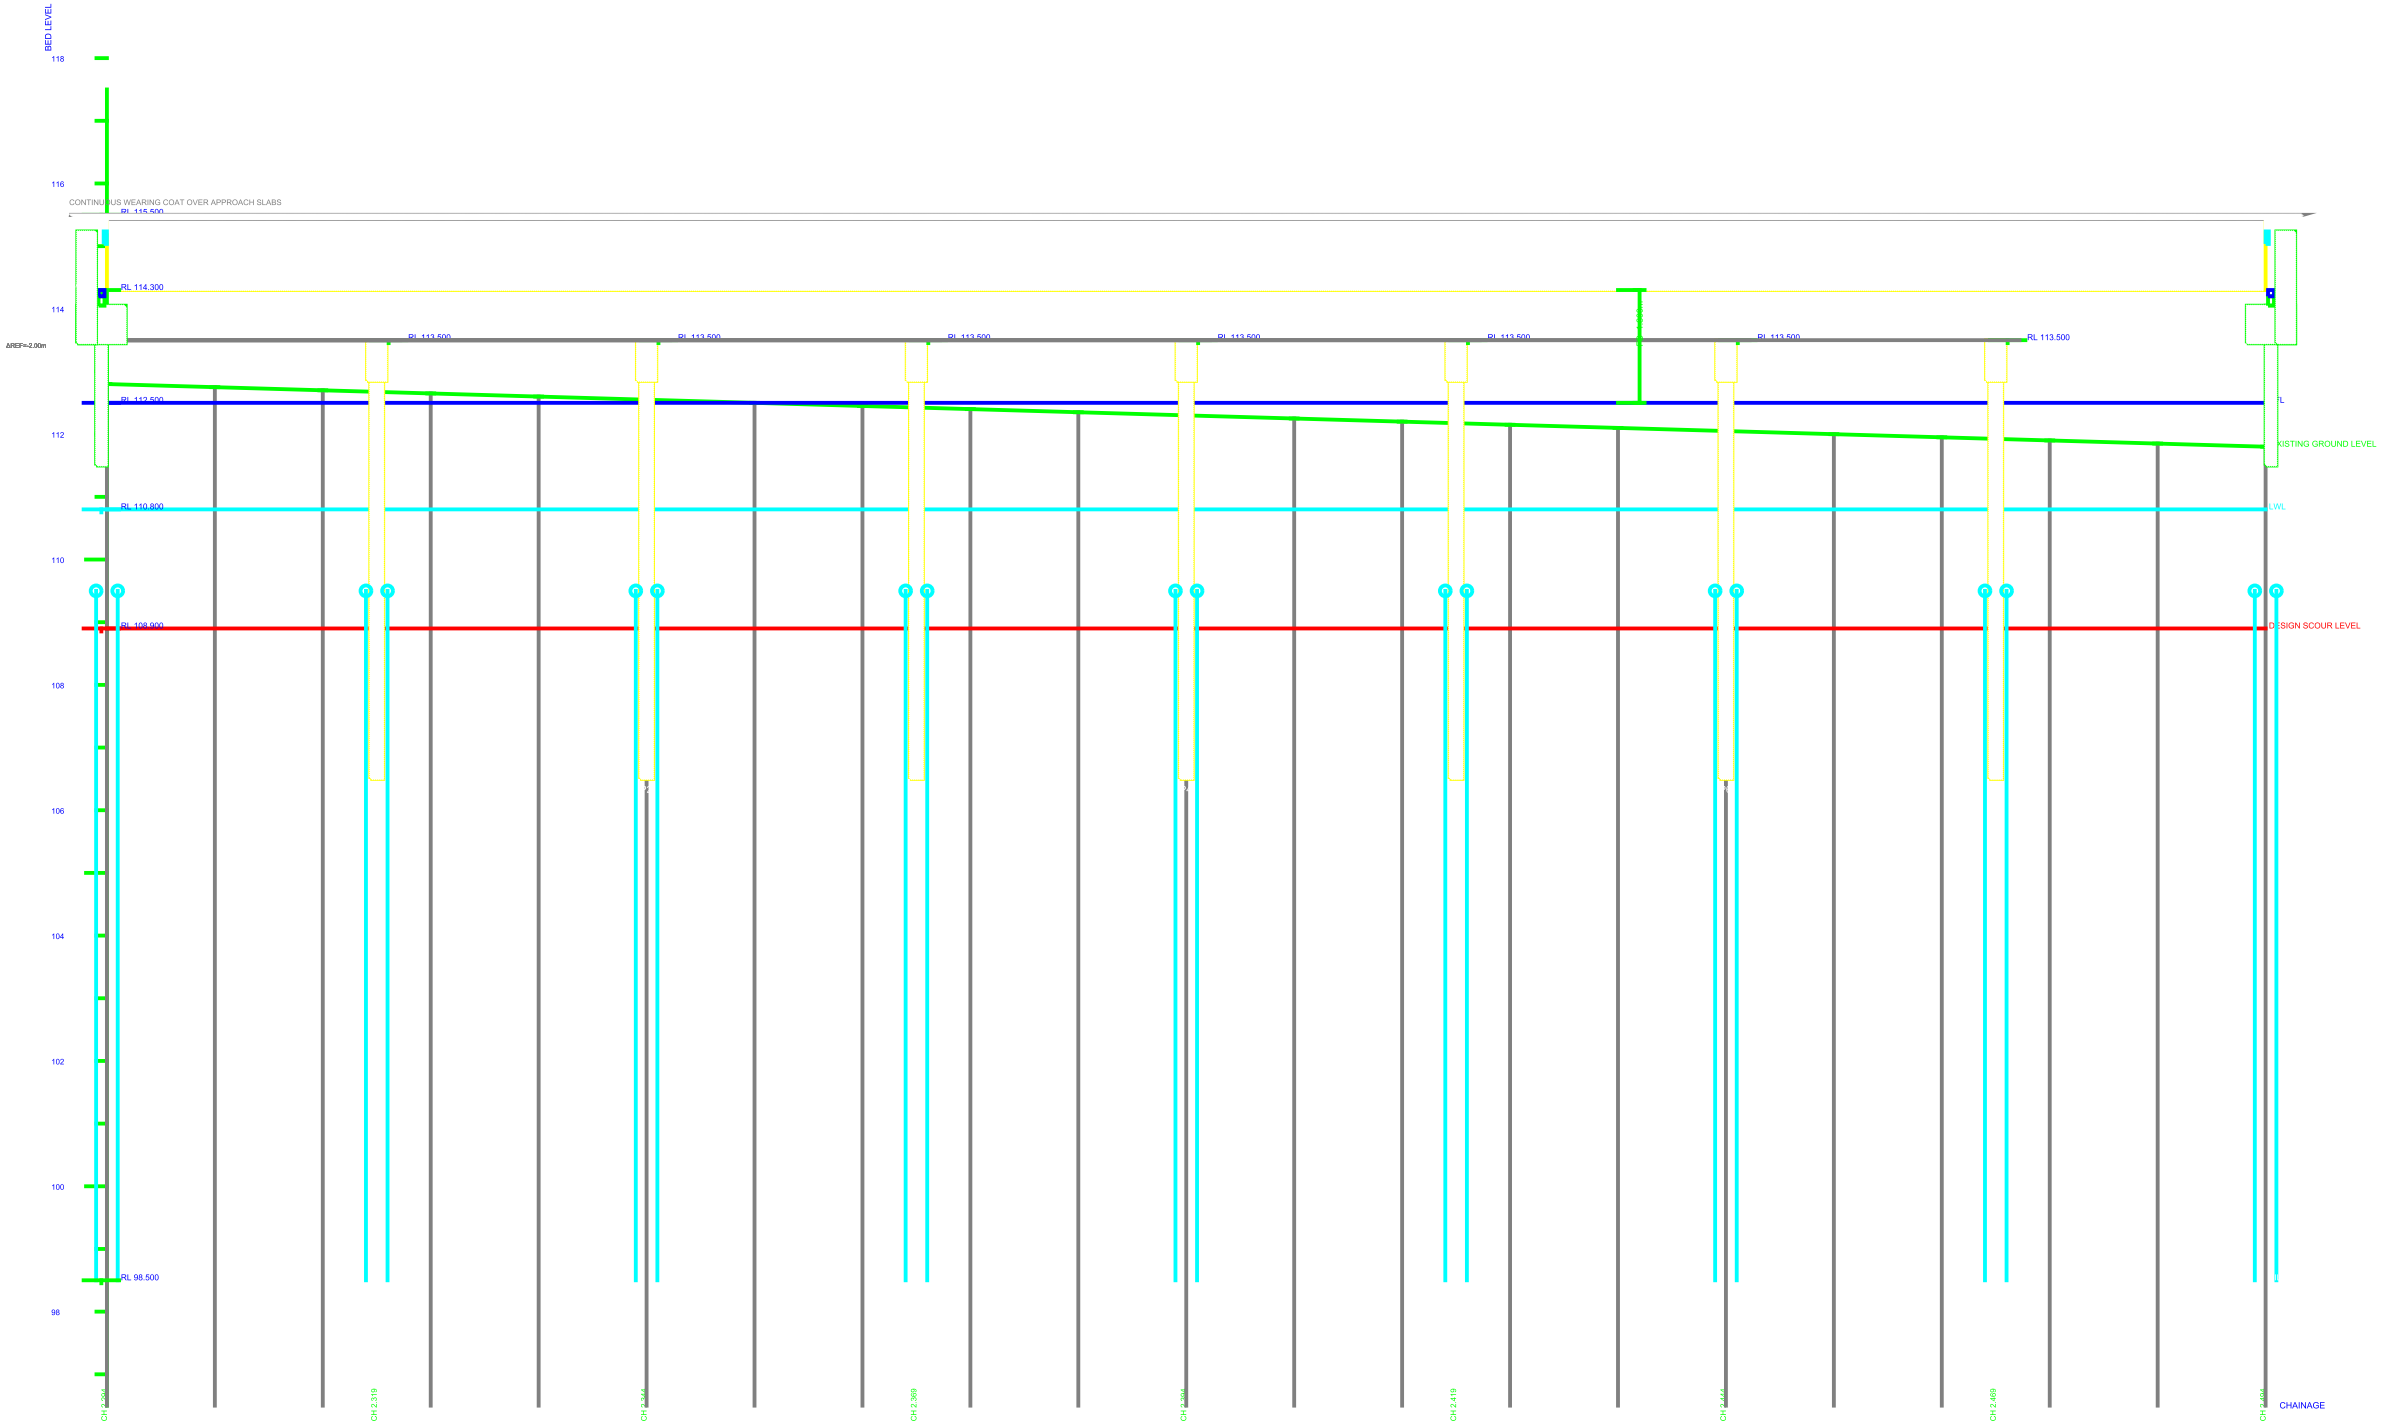

(Not to Scale — indicative)

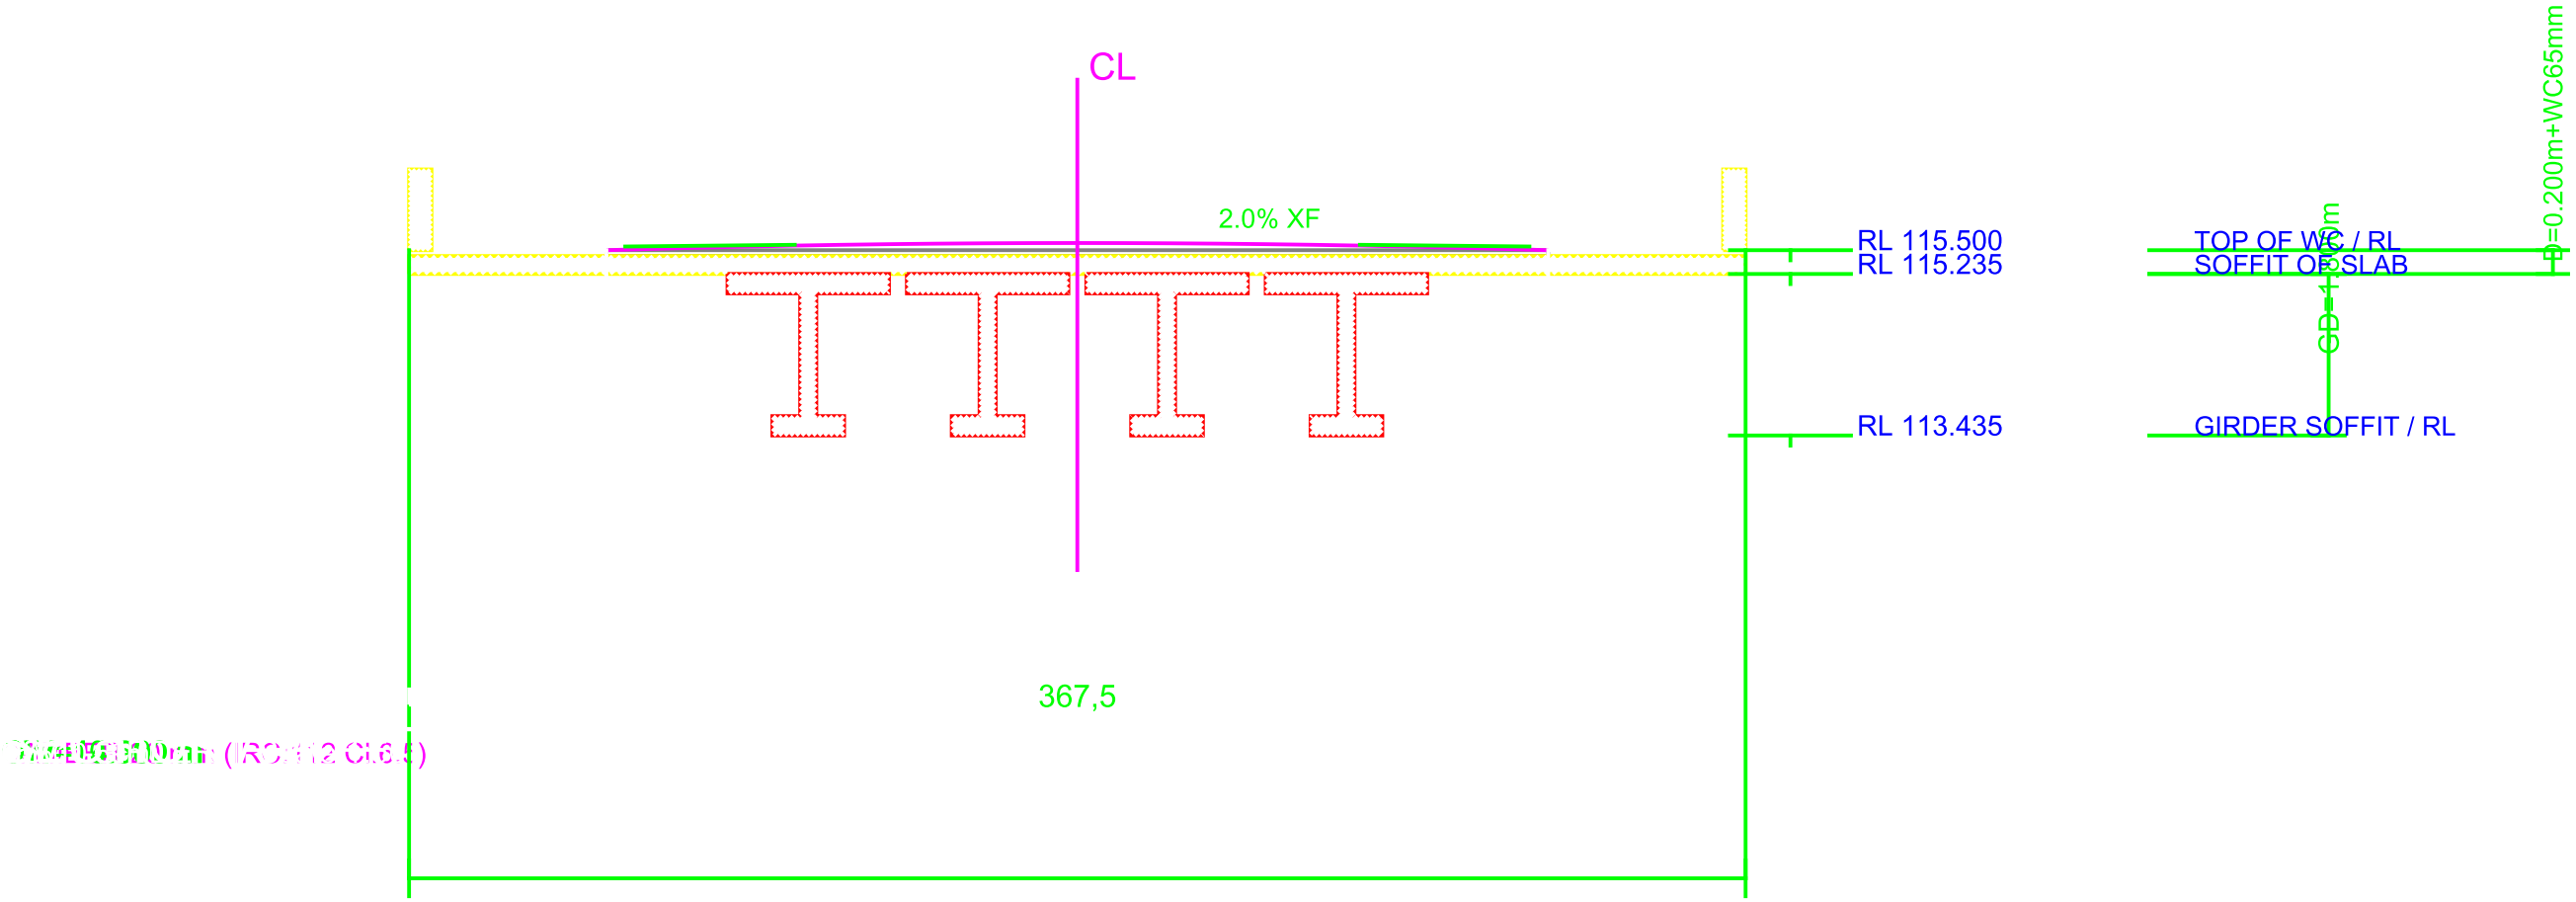
CL
2.0% XF
RL 115.500
RL 115.235
RL 113.435
TOP OF WC / RL
SOFFIT OF SLAB
GIRDER SOFFIT / RL
GD=1.800m
D=0.200m+WC65mm
367,5
(IRC:112 Cl.6.5)



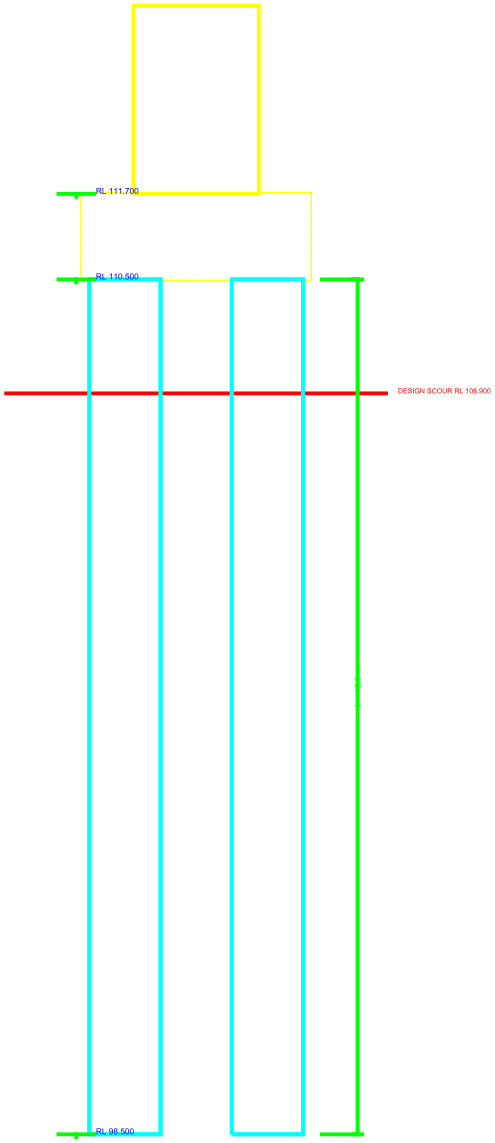
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
RL 98.500


c
c
c
c


c
c
c
c







QA-ABT-CAP-DE	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PR	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK



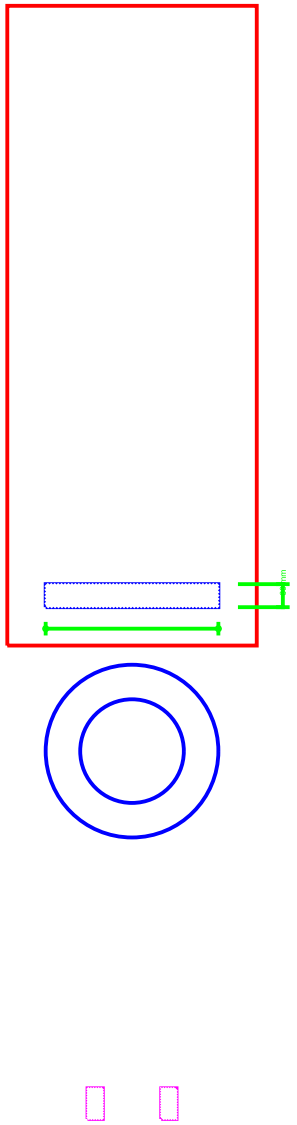

GAP

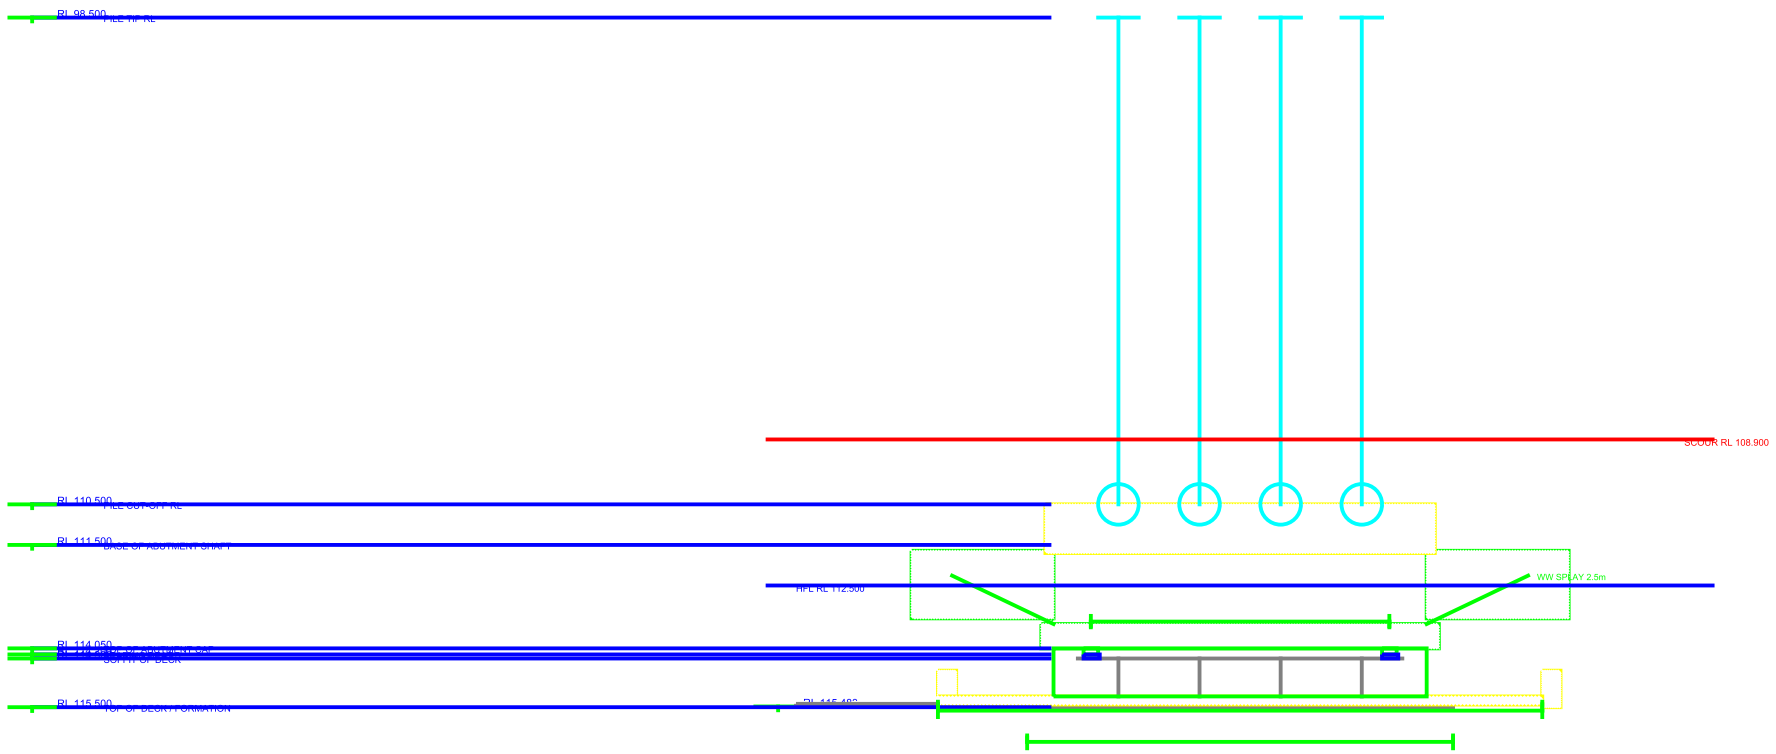
RL 98.500 PILE TIP RL
SCOUR RL 108.900
RL 110.500 PILE CUT-OFF RL
RL 111.500 BASE OF ABUTMENT SHAFT
HFL RL 112.500
WW SPLAY 2.5m
RL 114.050 TOP OF ABUTMENT CAP
SOFFIT OF DECK
RL 115.482
RL 115.500 TOP OF DECK / FORMATION

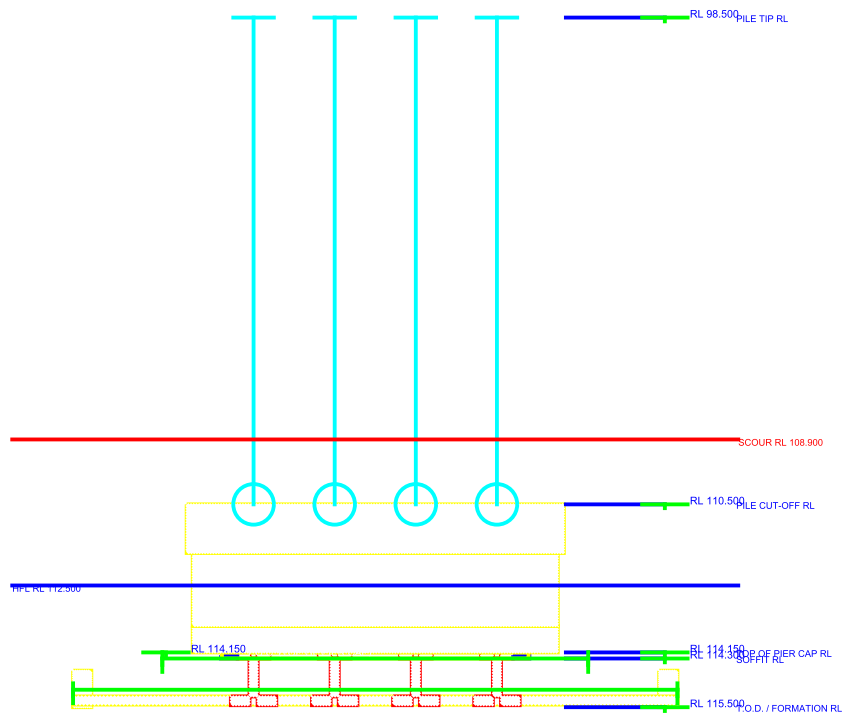
RL 98.500 PILE TIP RL
SCOUR RL 108.900
RL 110.500 PILE CUT-OFF RL
HFL RL 112.500
RL 114.150
RL 114.150 TOP OF PIER CAP RL
RL 114.300 SOFFIT RL
RL 115.500 T.O.D. / FORMATION RL

QA-ABT-CAP DEPTH	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP PROJ	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEE	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK

(Not to scale - indicative) [N] = 18.000 m PIER (BEYOND)