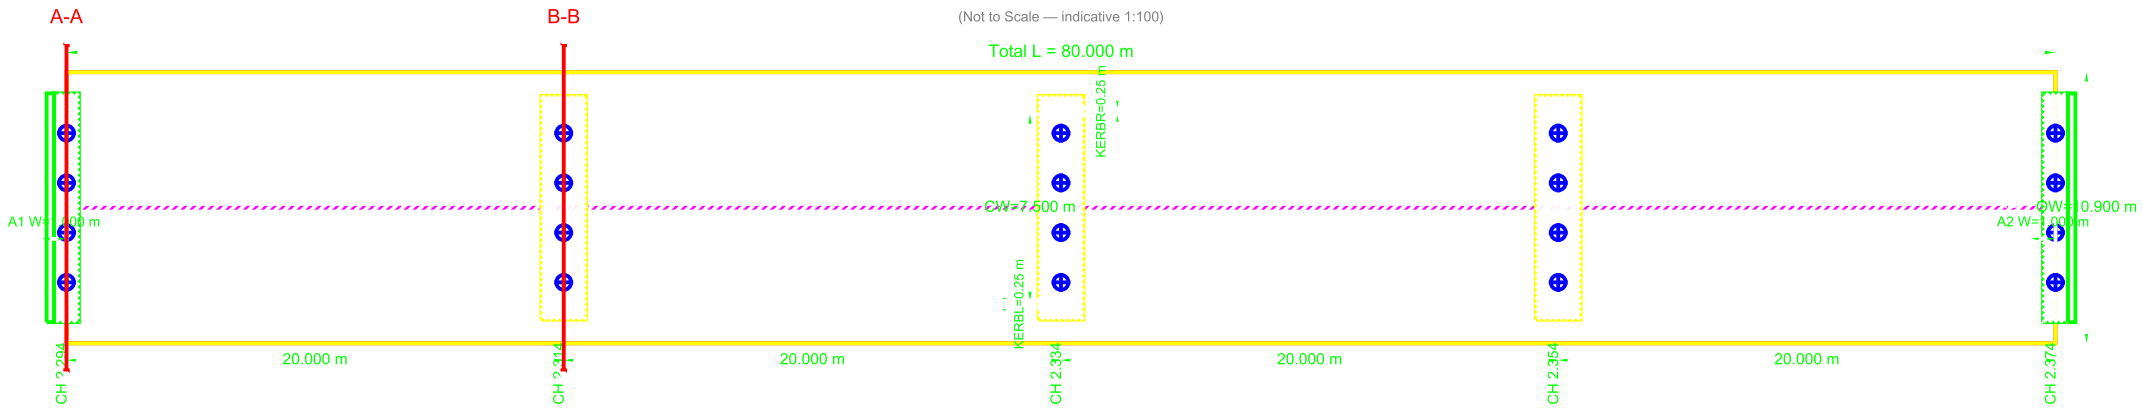

(Not to Scale — indicative 1:100)

A-A
B-B
Total L = 80.000 m
KERBR=0.25 m
A1 W=1.000 m
CW=7.500 m
OW=10.900 m
A2 W=1.000 m
KERBL=0.25 m
CH 2.294
20.000 m
CH 2.314
20.000 m
CH 2.334
20.000 m
CH 2.354
20.000 m
CH 2.374

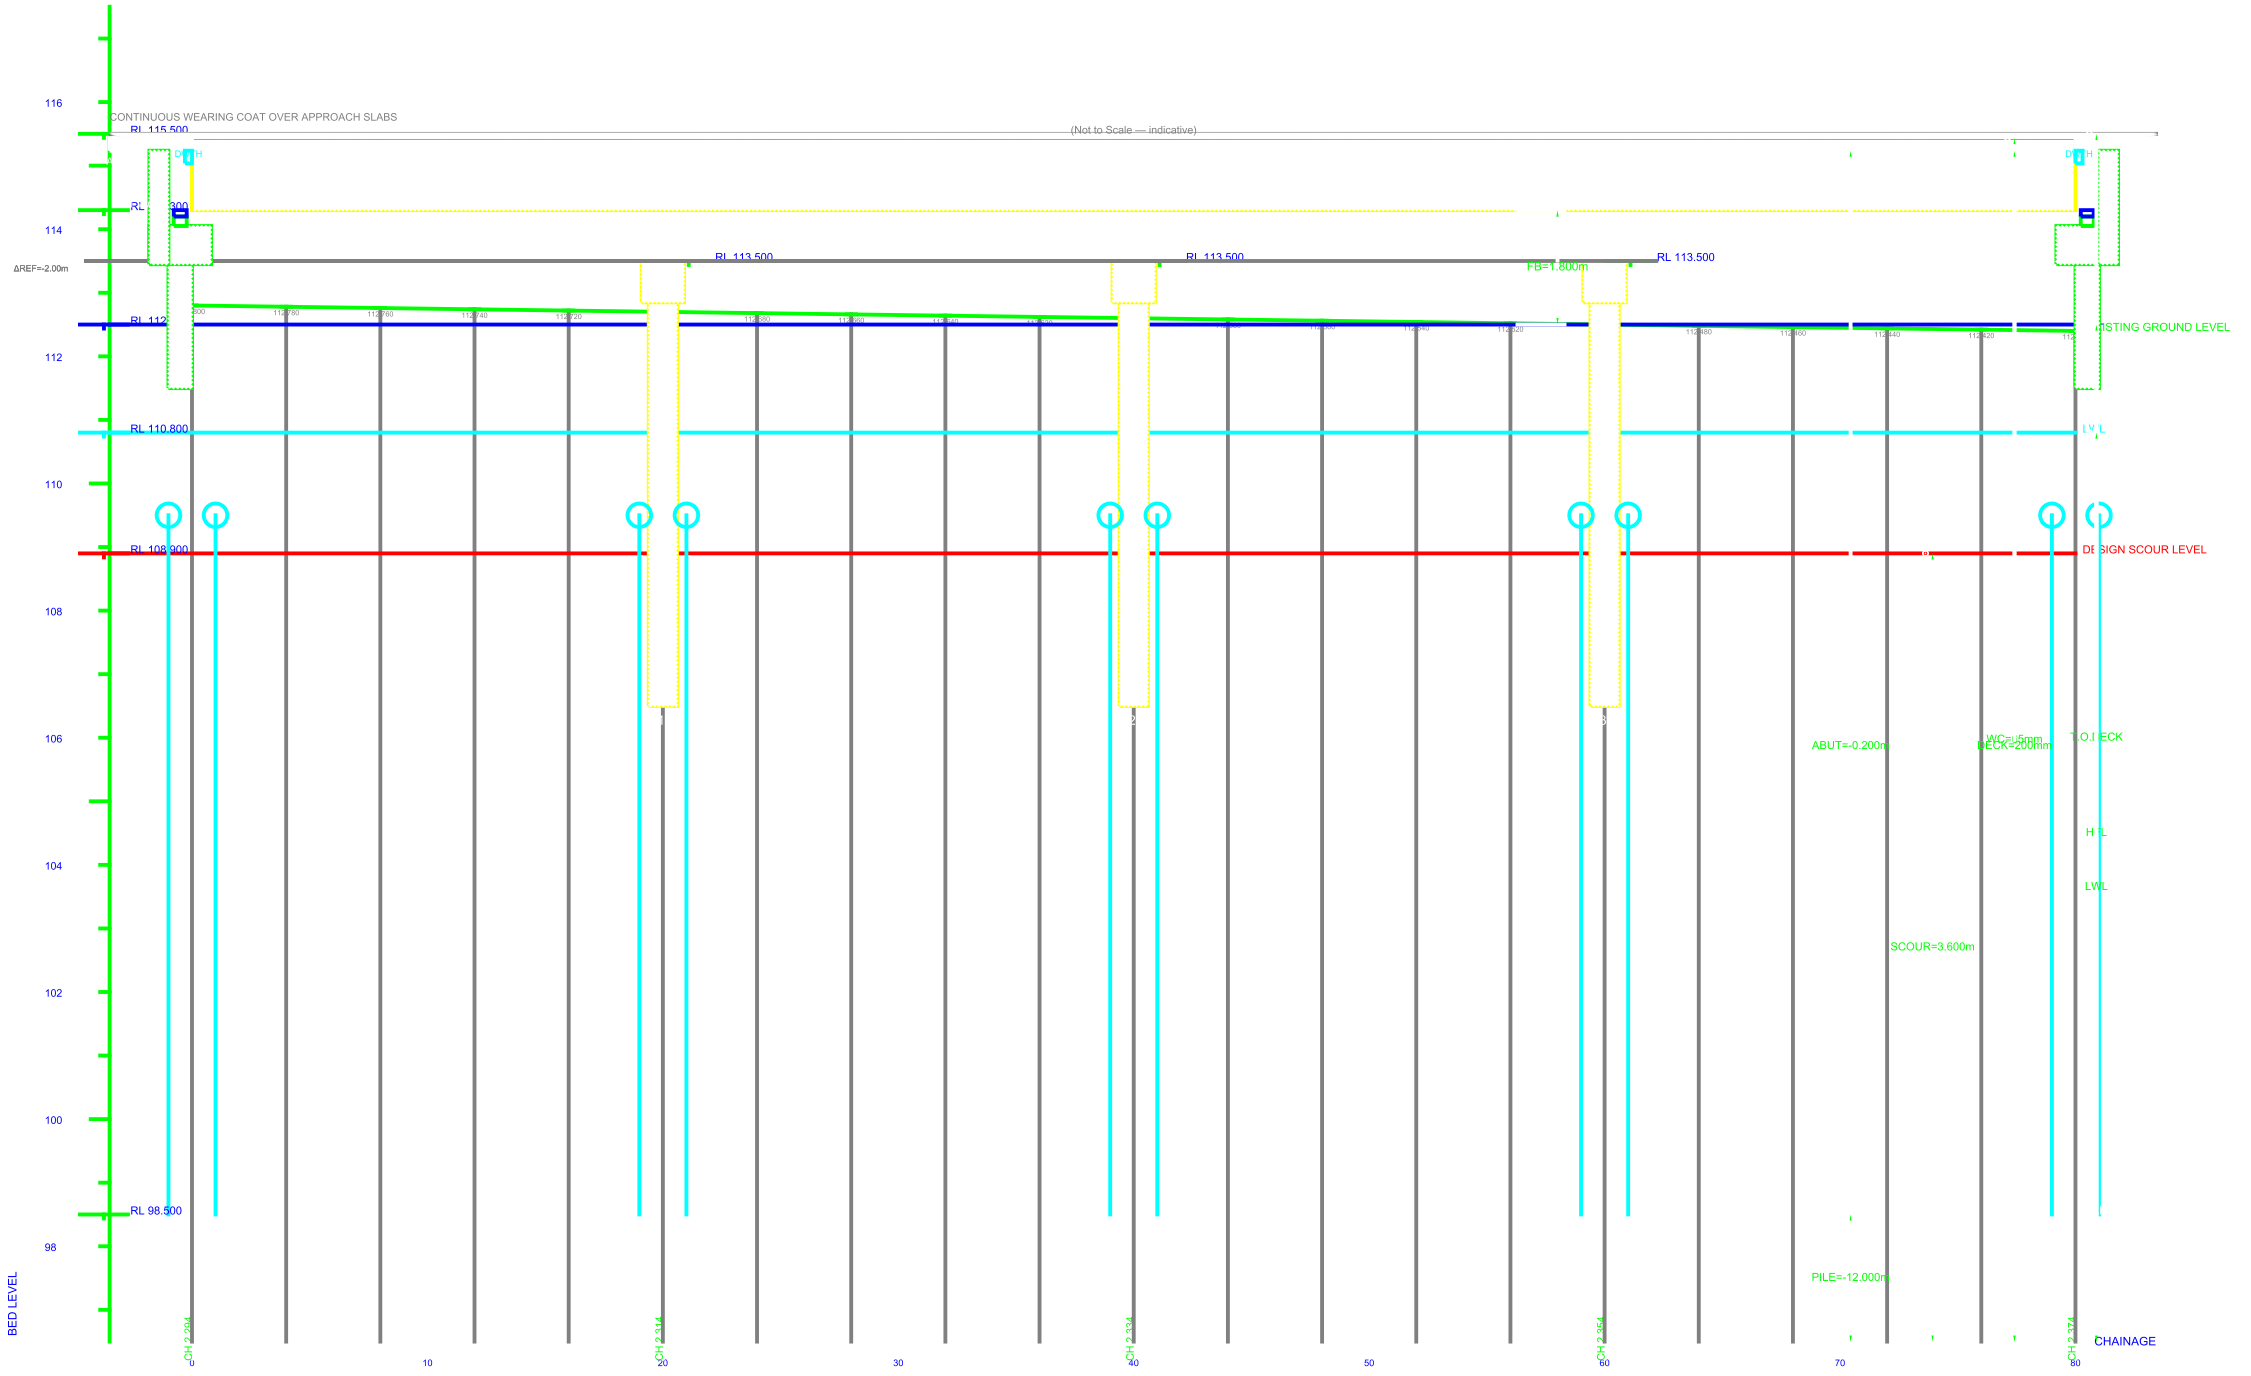
116
114
112
110
108
106
104
102
100
98
BED LEVEL
CONTINUOUS WEARING COAT OVER APPROACH SLABS
RL 115.500
(Not to Scale — indicative)
DWTH
RL 300
ΔREF=-2.00m
RL 113.500
RL 113.500
RL 113.500
FB=1.800m
RL 112
112.780
112.760
112.740
112.720
112.680
112.660
112.640
112.520
112.480
112.460
112.440
112.420
EXISTING GROUND LEVEL
RL 110.800
LWL
RL 108.900
DESIGN SCOUR LEVEL
ABUT=-0.200m
WC=65mm
DECK=200mm
T.O.DECK
HFL
LWL
SCOUR=3.600m
RL 98.500
PILE=-12.000m
CH 2.294
CH 2.314
CH 2.334
CH 2.354
CH 2.374
0
10
20
30
40
50
60
70
80
CHAINAGE

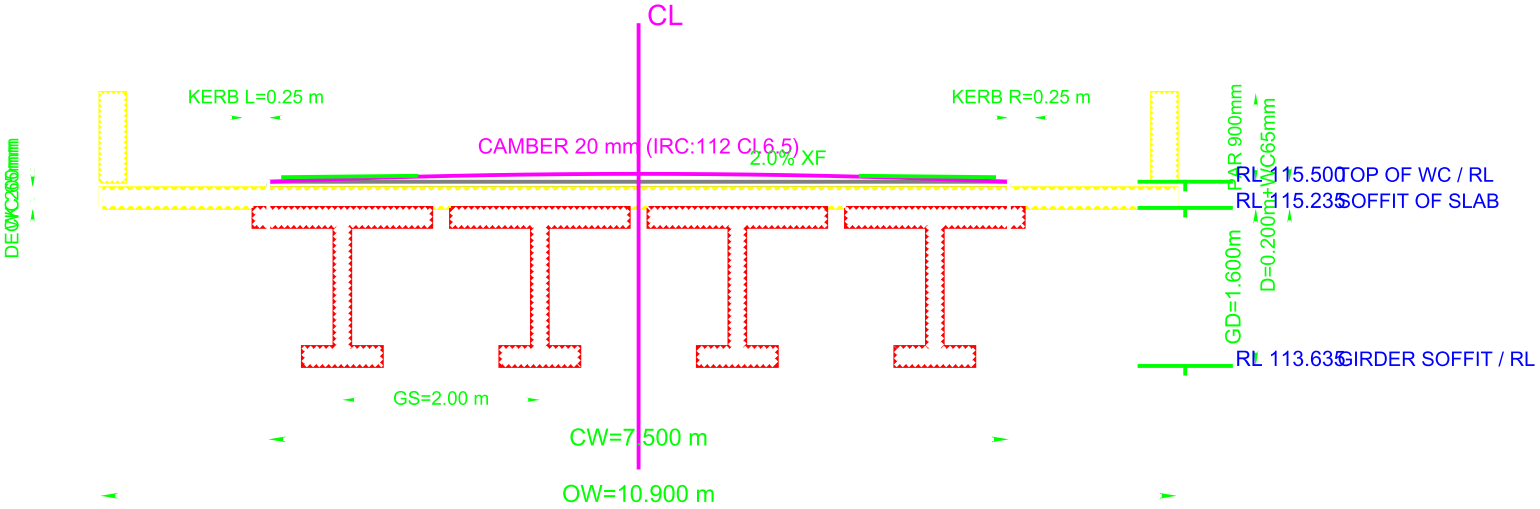
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 20 mm (IRC:112 Cl.6.5)
2.0% XF
DECK 200mm
WC 65mm
PAR 900mm
D=0.200m+WC65mm
RL 115.500 TOP OF WC / RL
RL 115.235 SOFFIT OF SLAB
GD=1.600m
RL 113.635 GIRDER SOFFIT / RL
GS=2.00 m
CW=7.500 m
OW=10.900 m


Cap L = 3.200 m
Cap W = 3.200 m

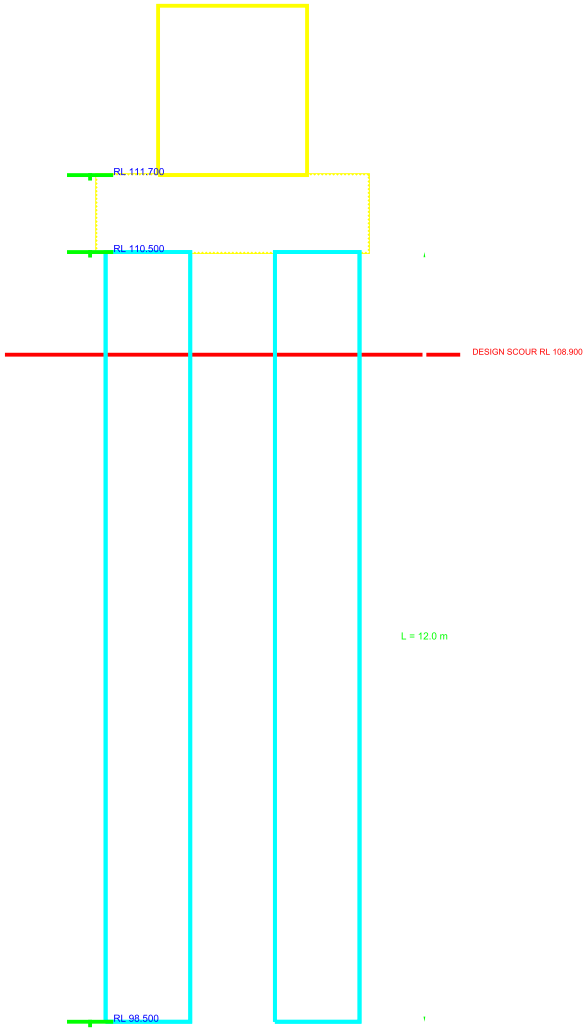
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
L = 12.8 m
RL 98.500


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


H=6.00m
Shaft=1.20m
HFL RL 112.500
Cap=1.80m


DW 200
H=2.80m
L=9.20m
WW=2.5m

L=9.00m
THK=1.20m

QA-ABT-CAP-	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK


APP THK=0.20m
THK=1.00m


60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▾ GAP ▾
DEPTH 80 mm
JOINT 160 mm

(Not to Scale — indicative)

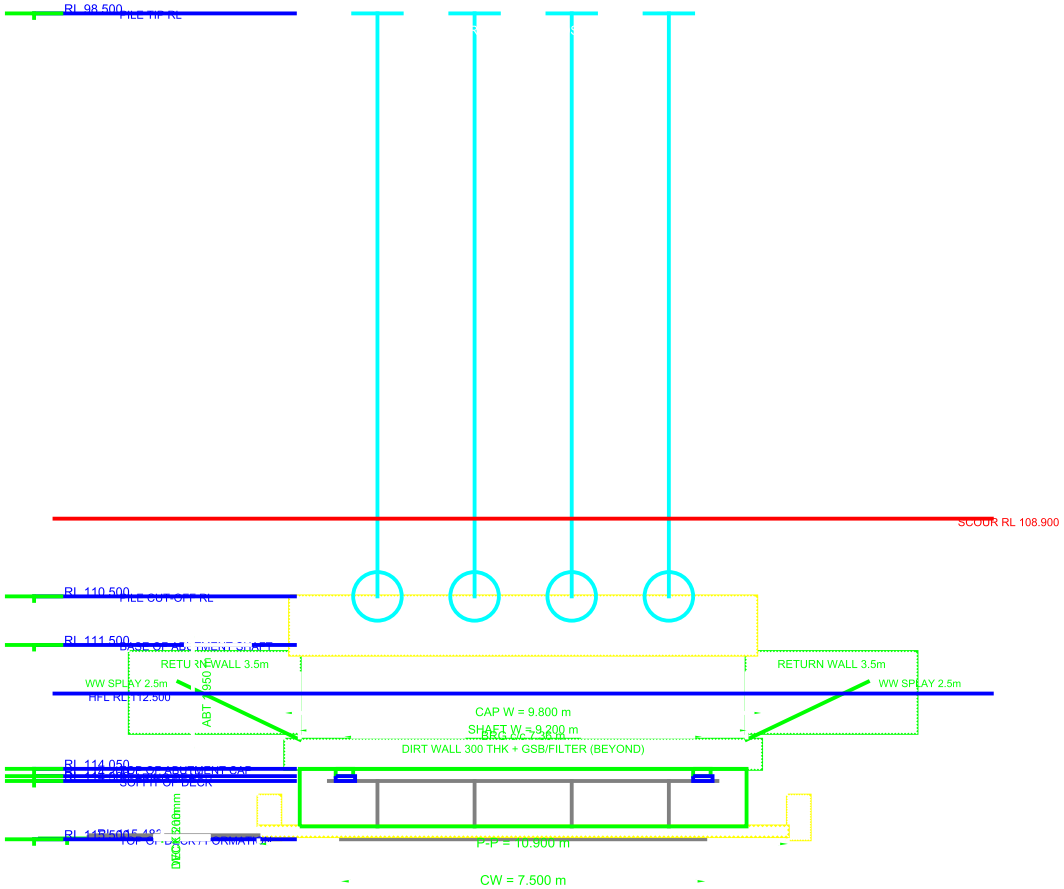
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
BASE OF ABUTMENT SHAFT
RETURN WALL 3.5m
RETURN WALL 3.5m
WW SPLAY 2.5m
WW SPLAY 2.5m
HFL RL 112.500
ABT 1950 mm
CAP W = 9.800 m
SHAFT W = 9.200 m
BRG c/c 7.36 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 114.050
BASE OF ABUTMENT CAP
SOFFIT OF DECK
RL 115.500
TOP OF DECK / FORMATION
DECK 1200mm
P-P = 10.900 m
CW = 7.500 m

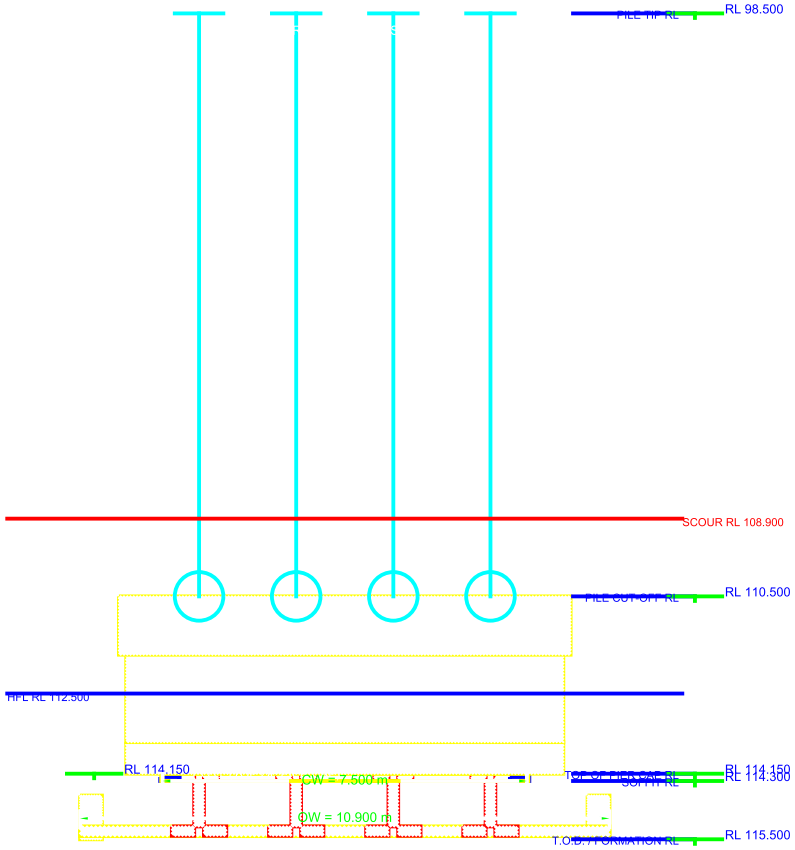
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
HFL RL 112.500
RL 114.150
CW = 7.500 m
TOP OF PIER CAP RL
SOFFIT RL
RL 114.150
RL 114.300
OW = 10.900 m
T.O.D. / FORMATION RL
RL 115.500

QA-ABT-C	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-C	Cap projection front/rear	0/0 mm	100-250 / 250-600 m	OK
QA-DW-TH	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TO	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WE	Weep holes provided	4	1 per 3 m	OK
QA-ABT-O	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-B	Base pressure	159.91 kPa	<= 350.00 kPa	OK