


WEEK 10 PRAC

REFILOE SESELINYANE

02 Oct. 26

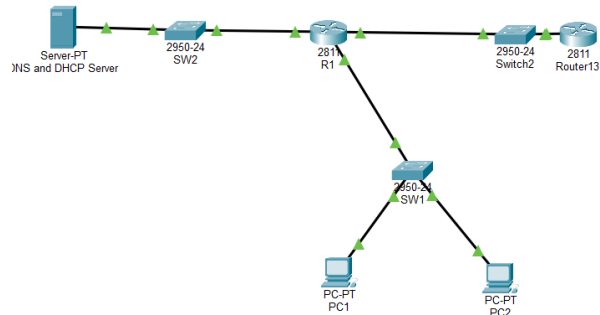

97)

```
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface f1/0
Router(config-if)#ip address 10.10.20.1 255.255.255.0
Router(config-if)#no shut
Router(config-if)#interface f0/1
Router(config-if)#ip address 10.10.10.1 255.255.255.0
Router(config-if)#no shut
Router(config-if)#
```

98) on R1:

```
Router>ena
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface f0/1
^
% Invalid input detected at '^' marker.

Router(config)#interface f1/0
Router(config-if)#ip address dhcp
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#
```

On Server:

```
Router>ena
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface f0/0
Router(config-if)#ip address 203.0.113.0 255.255.255.0
Bad mask /24 for address 203.0.113.0
Router(config-if)#ip address 203.0.113.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#ip dhcp pool TO_R1
Router(dhcp-config)#network 203.0.113.0 255.255.255.0
Router(dhcp-config)#default-router 203.0.113.1
Router(dhcp-config)#dns-server 10.30.20.20
Router(dhcp-config)#exit
Router(config)#
```

99) 1

IP Configuration

IP Configuration

☐ DHCP
☒ Static

IPv4 Address

10.10.20.10

Subnet Mask

255.255.255.0

Default Gateway

10.30.20.1

DNS Server

0.0.0.0

2)

Interface

FastEthernet0

Service

☒ On
☐ Off

Pool Name

LAN_POOL

Default Gateway

10.10.10.1

DNS Server

10.30.20.10

Start IP Address :

10

10

10

10

Subnet Mask:

255

255

255

0

Maximum Number of Users :

50

TFTP Server:

0.0.0.0

WLC Address:

0.0.0.0

Add

Save

Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
LAN_POOL	10.10.10.1	10.30.20.10	10.10.10.10	255.255.255.0	50	0.0.0.0	0.0.0.0
serverPool	0.0.0.0	0.0.0.0	10.10.20.0	255.255.255.0	512	0.0.0.0	0.0.0.0

3)

DNS

DNS Service

☒ On
☐ Off

Resource Records

Name

Type

A Record

Address

Add

Save

Remove

No.	Name	Type	Detail
0	www.ctu.ac.za	A Record	10.10.10.10

B)

```
Router>ena
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface f1/0
Router(config-if)#ip address 10.10.10.1 255.255.255.0
% 10.10.10.0 overlaps with FastEthernet0/1
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#interface f0/1
Router(config-if)#ip address 10.10.10.1 255.255.255.0
Router(config-if)#ip helper-address 10.30.20.10
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#
```

100)

IP Configuration	
Interface	FastEthernet0
IP Configuration	
☒ DHCP	☐ Static
DHCP failed. APIPA is being used.	
IPv4 Address	169.254.104.0
Subnet Mask	255.255.0.0
Default Gateway	0.0.0.0
DNS Server	0.0.0.0

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.30.20.10

Pinging 10.30.20.10 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.30.20.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.10.10.1

Pinging 10.10.10.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.10.10.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>nslookup www.ctu.ac.za
|
```