


Lower case | R21 technical drawing

FILE: p4x-eye-base-r21.stl

Quantity: 1 | Units: mm | Existing STL geometry; dimensions nominal

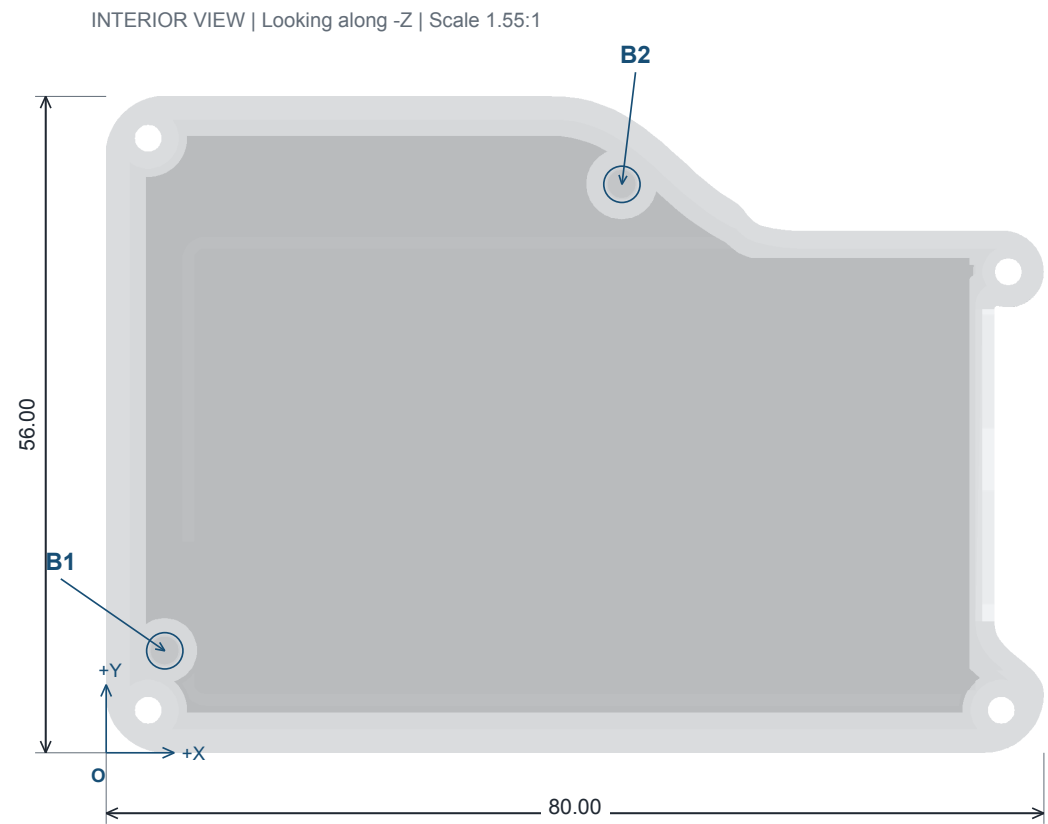

Envelope: 80.00 x 56.00 x 22.83

O / coordinates refer to the exported STL bounding box.

STL SHA-256: f19430f9aaa5f246a8e07a59c4b8288e024deea481c8ded9723ba4e58b0bcf14

2x M2 x 0.4 BONDED INSERTS

ID	X	Y	Entry Z
B1	5.00	8.70	13.00
B2	44.00	48.50	13.00

Insert from interior along -Z; seat flush.

EXISTING PILOT GEOMETRY

DIA 2.70 x 3.40 deep; lead-in DIA 3.10 x 0.25. DIA 2.40 tip relief to 7.00 total depth from entry face.

INSERT FIT TO BE CONFIRMED

Reference insert: DIA 3.00 x 3.20 long. Current pilots are not adhesive-fit pockets for this insert. Confirm insert, adhesive and revised pocket dimensions before printing. Do not heat-set into cured resin.

Fasteners: M2 x 8 nylon, measured under head. Keep thread and screw-tip space free of adhesive.

B1 boss DIA 5.50; B2 DIA 6.00. Four other case fixings: DIA 2.30 clearance, underside DIA 4.50 x 10.20 head wells. Closed well rim 0.75; screw-tip gap 0.50. Preserve closed floor.