
AUTOMATIC TRANSAXLE OUTLINE [EW6A-EL]

id0517I2350000

Outline


Contribution to low fuel economy	• Wide TCC range • Clutch/brake resistance reduction
Realized direct feel and quick shifting	• Oil passage resistance reduction and improved clutch/brake response by optimizing clutch rigidity • Improved solenoid valve response
Smooth and powerful start-up	• Torque converter characteristics when accelerating and optimized range
Smooth shifting	• Control valve body integrated with TCM adopted • Direct linear solenoid valve has been adopted to improve shift accuracy

Construction
Cross-sectional view

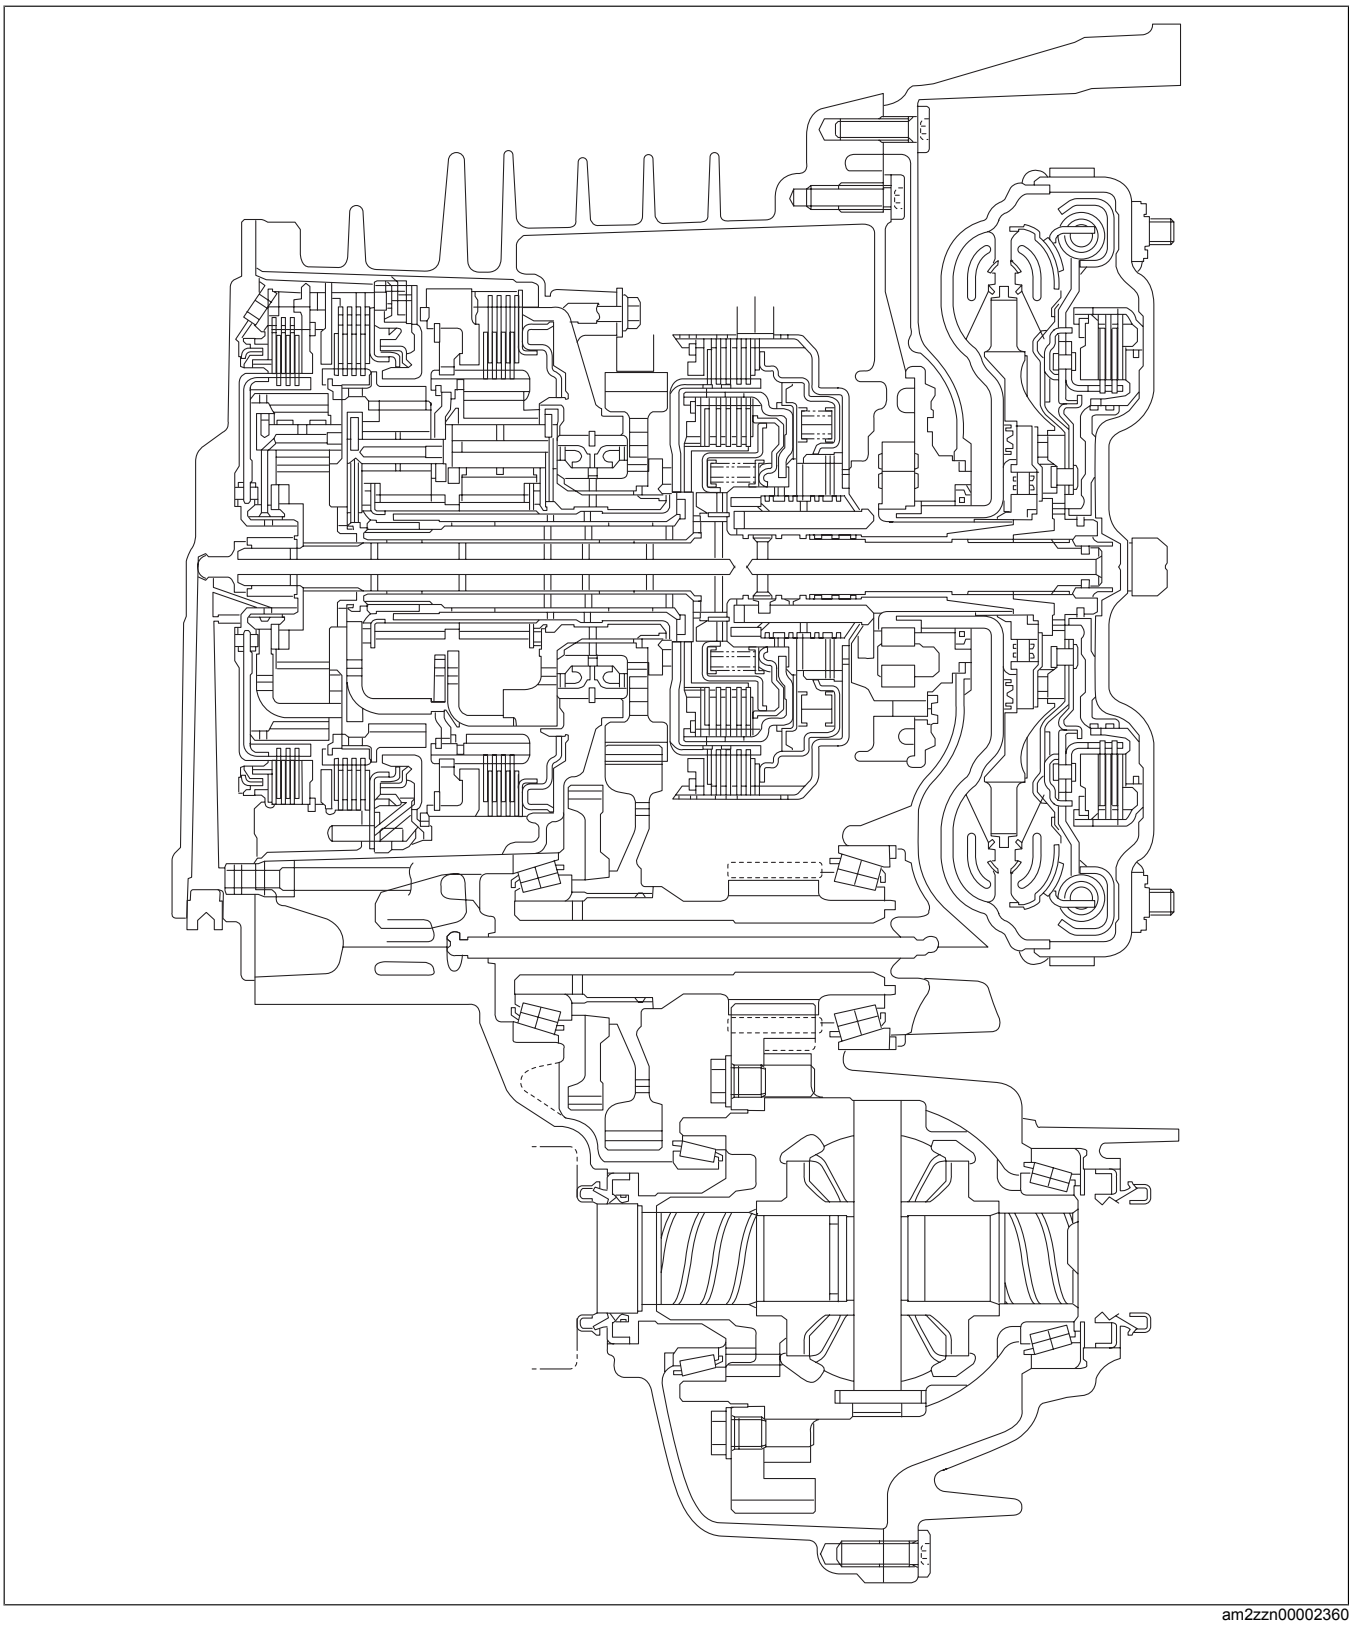

am2zzn00002360

- The electronic control automatic transaxle consists of three systems which are divided into the powertrain with a torque converter, the hydraulic control mechanism, and the electronic control mechanism.

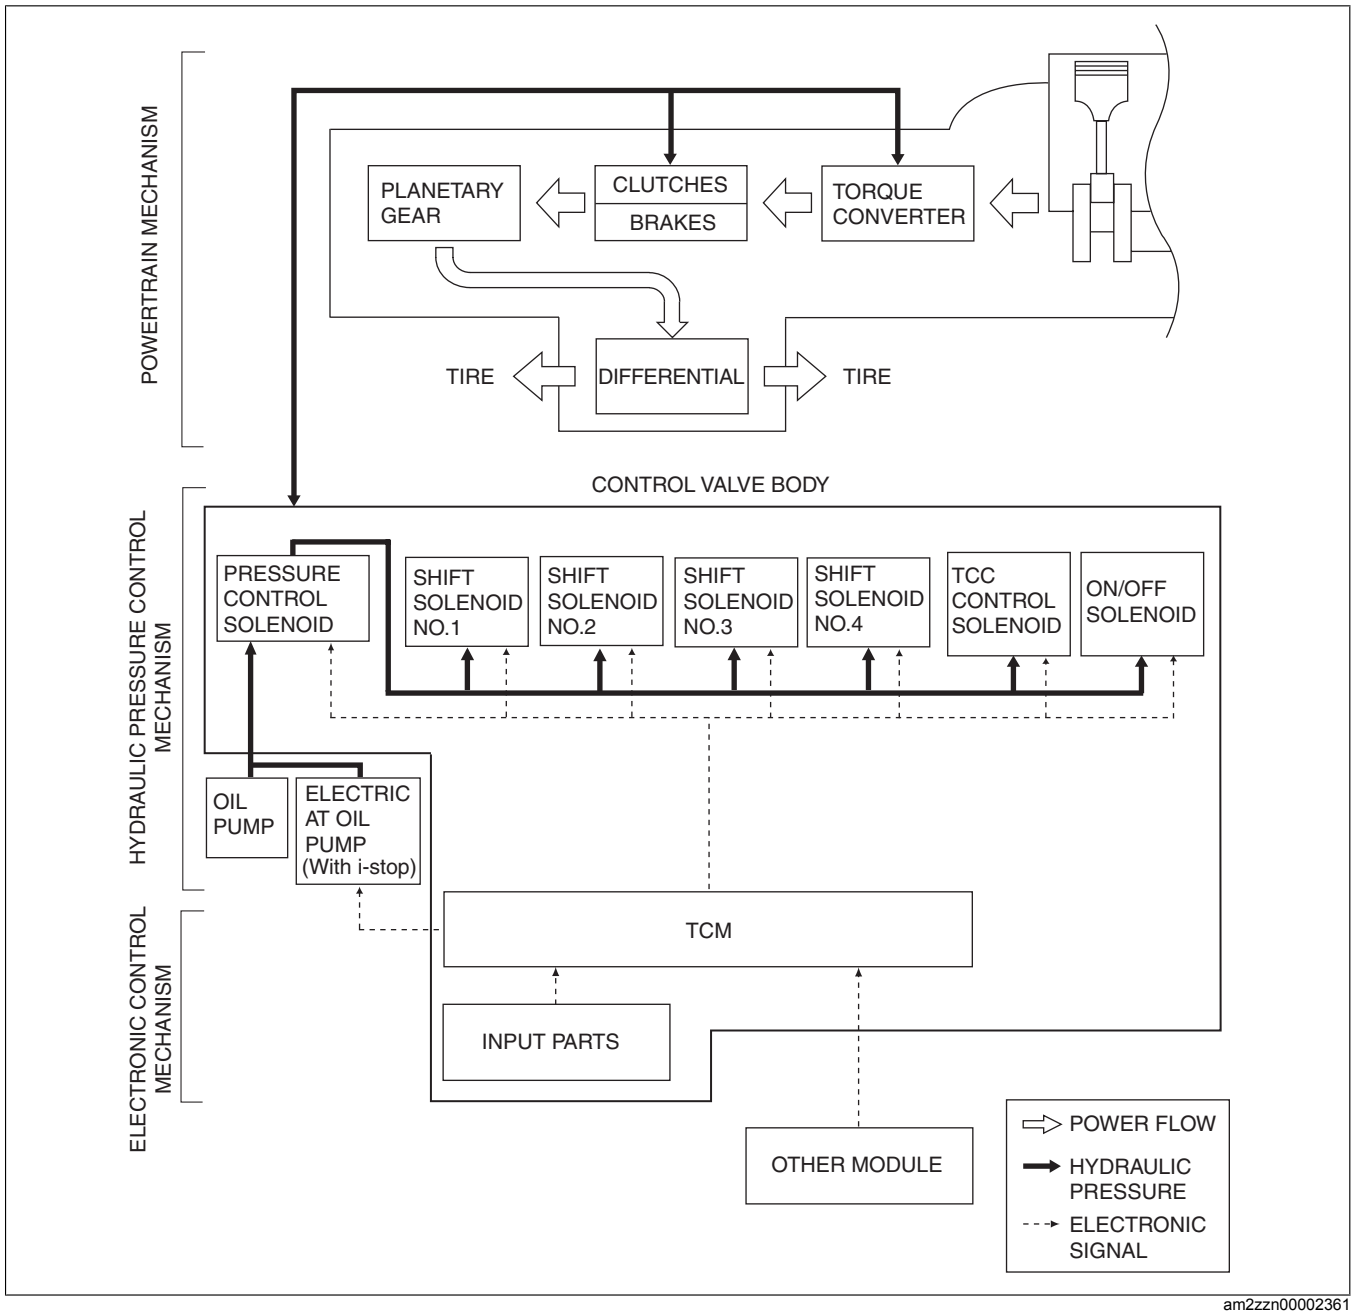

am2zzn00002361

Operation
Automatic transaxle operation chart

Position	Mode	Gear position	Gear ratio	TCC	Operation of powertrain parts						Operation of shift solenoid					
					Low clutch	High clutch	Low and reverse brake	2-6 brake	R-3-5 brake	One-way clutch	Shift solenoid No.1	Shift solenoid No.2	Shift solenoid No.3	Shift solenoid No.4	TCC control solenoid	ON/OFF solenoid
P	—	—	—				×				CLOSE	CLOSE	CLOSE	OPEN	CLOSE	DRAIN
R	—	Reverse	3.893				×		×		CLOSE	CLOSE	OPEN	OPEN	CLOSE	DRAIN
N		—	—				×				CLOSE	CLOSE	CLOSE	OPEN	CLOSE	DRAIN
D/M	NORMAL	1GR	3.552	×	×		×			⊗	OPEN	CLOSE	CLOSE	OPEN	OPEN	DRAIN
		2GR	2.022	×	×			×			OPEN	OPEN	CLOSE	CLOSE	OPEN	SUPPLY
		3GR	1.452	×	×				×		OPEN	CLOSE	OPEN	CLOSE	OPEN	SUPPLY
		4GR	1.000	×	×	×					OPEN	CLOSE	CLOSE	OPEN	OPEN	SUPPLY
		5GR	0.708	×		×			×		CLOSE	CLOSE	OPEN	OPEN	OPEN	SUPPLY
		6GR	0.599	×		×		×			CLOSE	OPEN	CLOSE	OPEN	OPEN	SUPPLY

× : Operating
⊗ : Transmits torque only during driving operation
— : Not applicable
OPEN: Engages the line pressure to the clutch pressure
CLOSE: Drains the clutch pressure
SUPPLY: Engages the output port and the supply port
DRAIN: Engages the output port and the drain port (Drains the output port)

am2zzn00003936