
ACCESSORY SOCKET INSPECTION

id092100899900

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION.)
2. Remove the following parts:
   (1) Center console tray (See CENTER CONSOLE TRAY REMOVAL/INSTALLATION.)
   (2) Shift bezel (See SHIFT BEZEL REMOVAL/INSTALLATION.)
   (3) Upper panel (See UPPER PANEL REMOVAL/INSTALLATION.)
   (4) Shift lever knob (MTX) (See MANUAL TRANSAXLE SHIFT MECHANISM REMOVAL/INSTALLATION [F66M-R].)
   (5) Selector lever knob (ATX) (See AUTOMATIC TRANSAXLE SHIFT MECHANISM REMOVAL/INSTALLATION.)
   (6) Shift panel (See SHIFT PANEL REMOVAL/INSTALLATION.)
   (7) Console side panel (See CONSOLE SIDE PANEL REMOVAL/INSTALLATION.)
   (8) Front console box (See FRONT CONSOLE BOX REMOVAL/INSTALLATION.)
   (9) CD player (See CD PLAYER REMOVAL.) (See CD PLAYER INSTALLATION.)
   (10) Front console (See FRONT CONSOLE REMOVAL/INSTALLATION.)
   (11) Accessory socket (See ACCESSORY SOCKET REMOVAL/INSTALLATION.)
3. Connect the tester probe to the position shown in the figure and verify that there is continuity.
   - If it cannot be verified, replace the accessory socket. (See ACCESSORY SOCKET REMOVAL/INSTALLATION.)

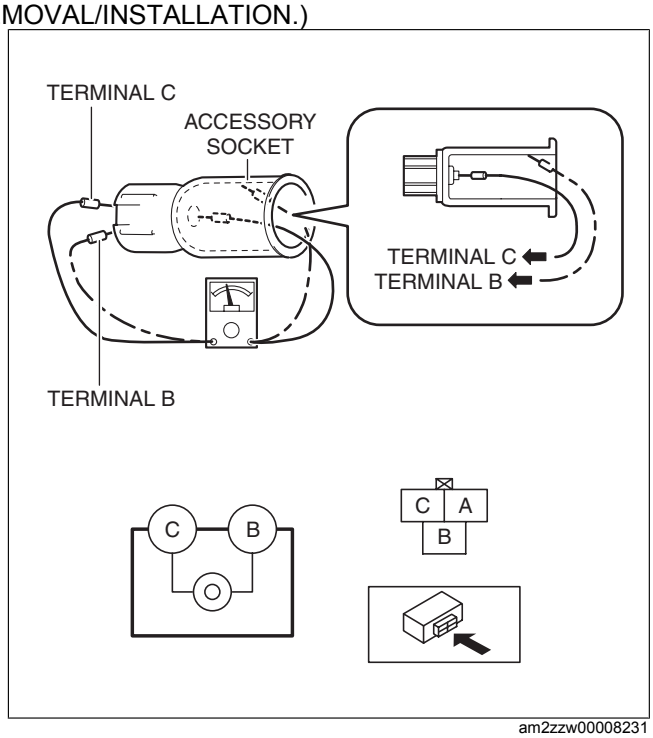

am2zzw00008231