
UNDERBODY DIMENSIONS [DIMENSIONS]

id098010990000


- The following figures are bottom and side views.

4SD


STRAIGHT-LINE DIMENSIONS

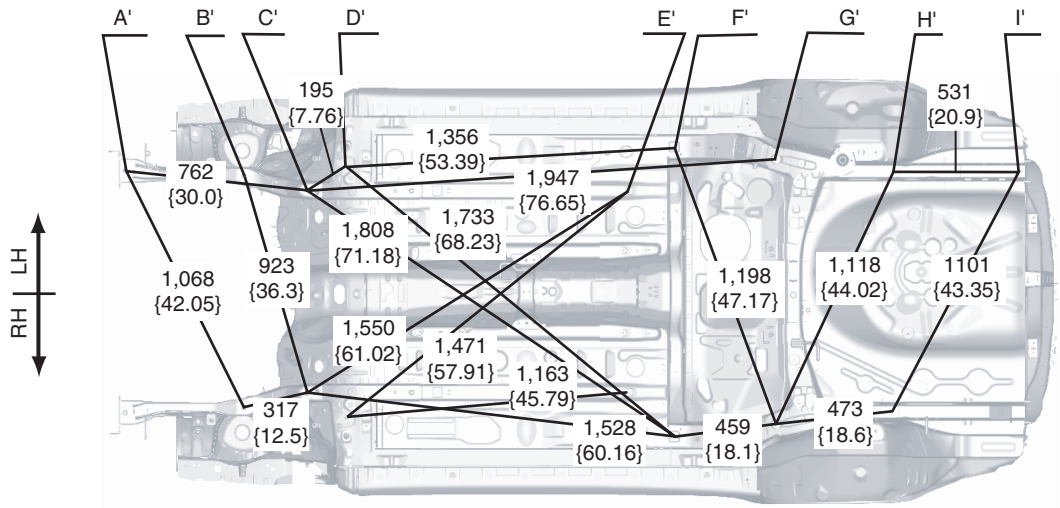

FLAT-PLANE DIMENSIONS

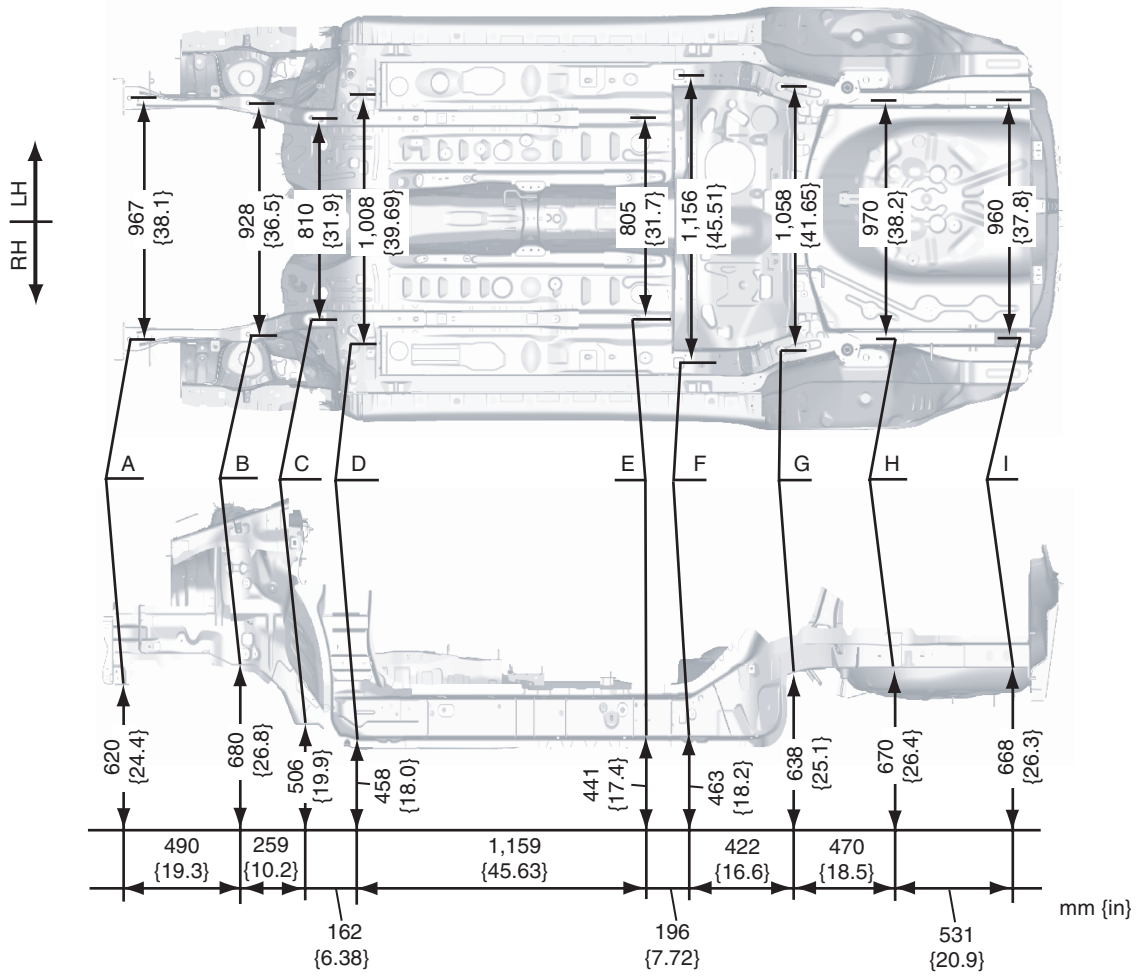

am2zzb00000672

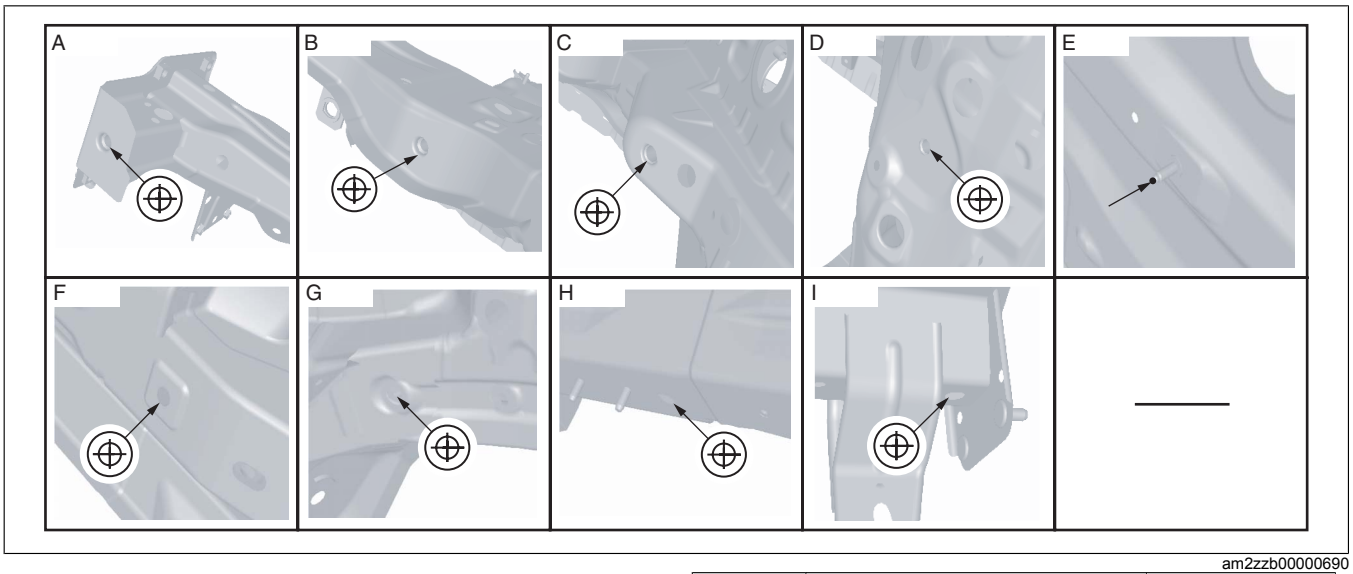


am2zzb00000690


Point symbol	Designation	Hole diameter or bolt or nut size (mm {in})
A	Front side frame outer datum hole	φ16 {0.63}
B	Suspension mount bolt installation hole	φ16 {0.63}
C	Suspension member installation nut	M14
D	Front suspension bracket installation hole	M10
E	Floor under cover installation bolt	—

Point symbol	Designation	Hole diameter or bolt or nut size (mm {in})
F	Rear frame reinforcement datum hole	φ16 {0.63}
G	Rear side frame rear datum hole	φ16 {0.63}
H	Rear side frame rear datum hole	φ12 {0.47}
I	Rear side frame datum hole	16 X 20 {0.63 X 0.79}

STRAIGHT-LINE DIMENSIONS

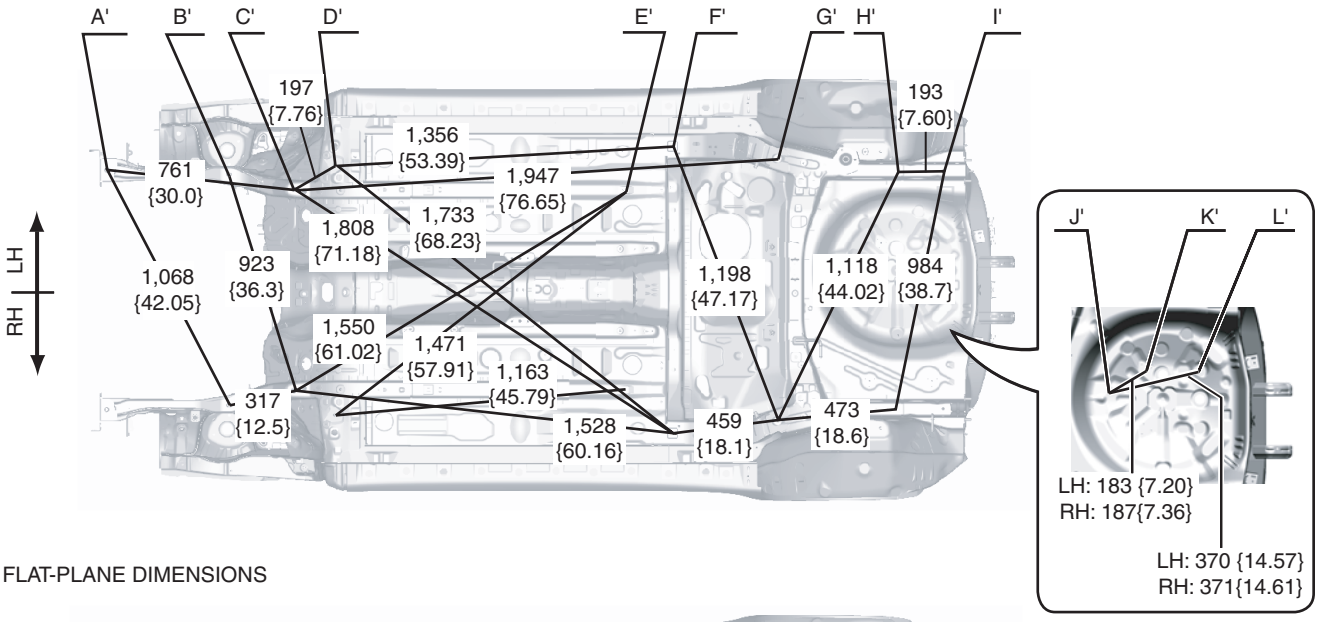


FLAT-PLANE DIMENSIONS

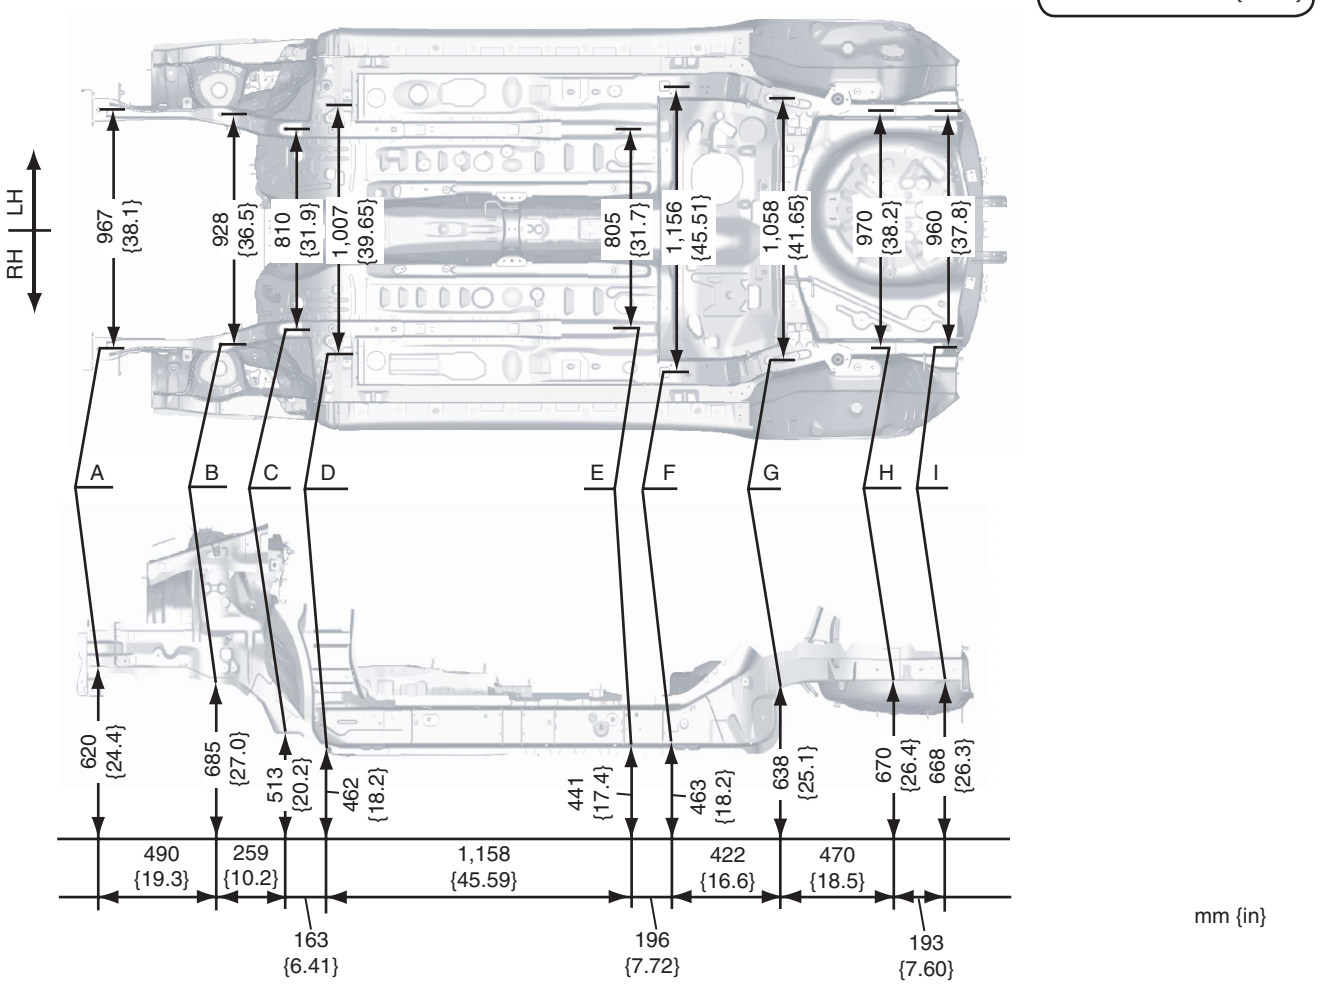

mm {in}

am2uub00000165

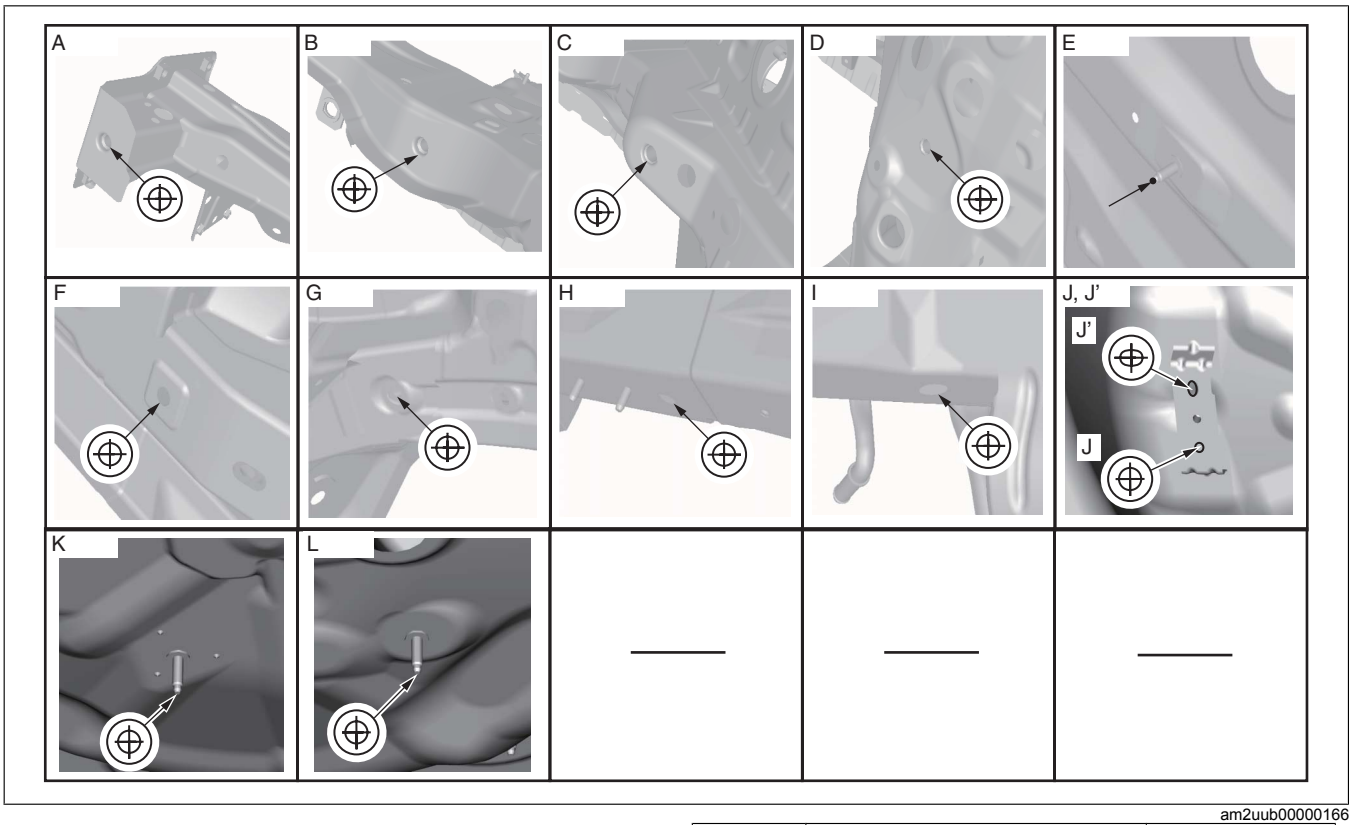

am2uub00000166

Point symbol	Designation	Hole diameter or bolt or nut size (mm {in})
A	Front side frame outer datum hole	φ16 {0.63}
B	Suspension mount bolt installation hole	φ16 {0.63}
C	Suspension member installation nut	M14
D	Torque box installation hole	M10
E	Front floor panel installation bolt	—
F	Rear side frame datum hole	φ16 {0.63}
G	Rear frame reinforcement datum hole	φ16 {0.63}

Point symbol	Designation	Hole diameter or bolt or nut size (mm {in})
H	Rear side frame rear datum hole	φ12 {0.47}
I	Rear side frame rear datum hole	16 X 20 {0.63 X 0.79}
J	Fuel tank installation hole	φ7 {0.3}
K	Air component box installation bolt	M6
L	Air component box installation bolt	M6