12-1/4” CR713-XR+(K)(BR)

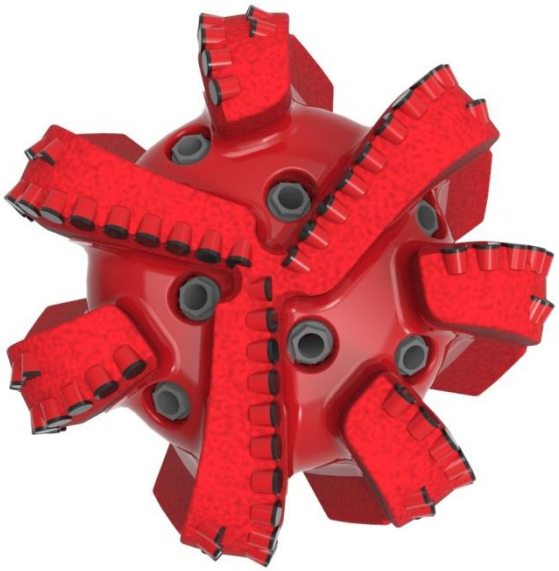

Drill Bit Specifications:

Cutter Size (Primary, Sec)	5/8”,1/2”
Cutter Count (Total, Gage)	87,11
Blade Count	7
Gage Length (Inches)	3.00
Nozzle Count (Primary, Sec.)	7
Nozzle Series (Primary, Sec.)	60
JSA (Sq. Inches)	32.92
Max. TFA (Sq. Inches)	3.34

Operating Parameters:

Max. Weight on Bit (1,000 Lbs.)	60
Make-up Torque (ft/lbs)	40,563

Nominal Dimensions:

Overall Length (Inches)	17.87
Make Up Length (Inches)	13.00
Bit Breaker	SKB-21011
Connection	Ø6-5/8" API Reg.
Approx. Weight (Lbs.)	*220

*Long tool joint available upon request (adds 6” to fishing neck, makeup and overall length, and 64 lbs to approximate weight).

Tailor-Made Features:

- Premium grade cutters maximize ROP and Life
- Optimized 3” gage: 2” full / 1" tapered
- Nozzle configuration and large open face volume optimize blade cleaning and cuttings removal

713-XR+(K)(BR) Nomenclature Explained:

- 7 = Number of Blades
- 13 = Primary Cutter Size (13mm)
- XR = Backup Cutters
- 7 = Number of Nozzles
- K = Bullets
- BR = Back Reamers

3446 S. Main
Pearland, TX 77581
1-866-470-4202