

Suggestions and tips for printing the Lighthouse by CapybaraHackster.

PLA – 0,2 mm layers. 15% infill. 2 wall loops. Top shell 5 layers, bottom shell 3 layers.
The overall layout suggestion, to make everything fit onto six plates.


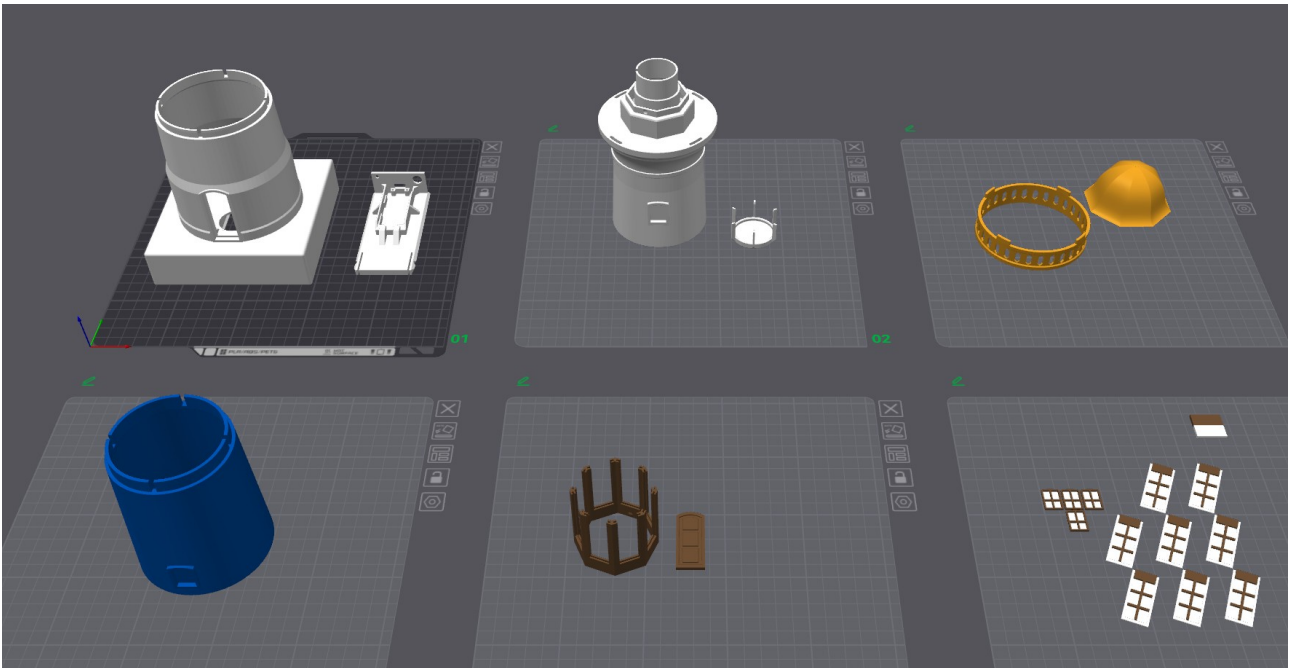


Plate 1 – make sure you use supports for lower body. Especially the very outer edge of the opening – then it will fit together nicely after.

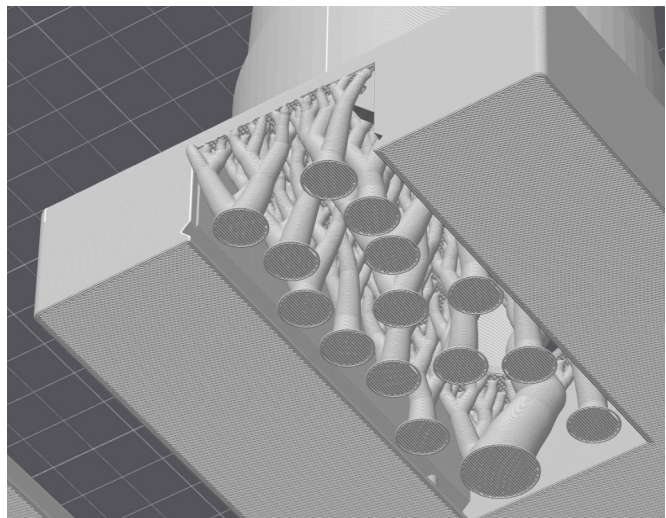

The Pico holder/hatch does not need support
And will print flat on surface.

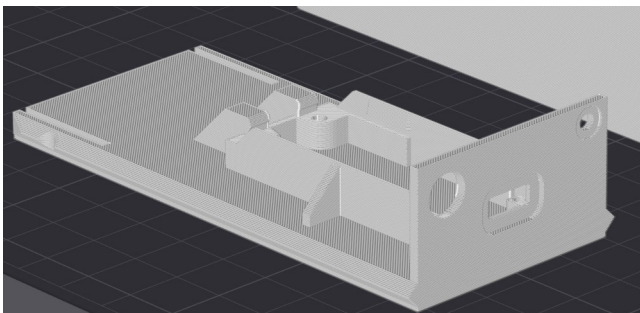


Plate 2 – use brim (the skirt around the part on the plate – that you remove after the printing) for the towers top part – otherwise the contact are to the print bed can be very small and it might brake loose during print. I print it without supporting – all the angels should make it possible to print without support.

Print the holder cap upside down, flat surface on bed (this item is only needed when using the lighthouse as functional lamp or deco later).

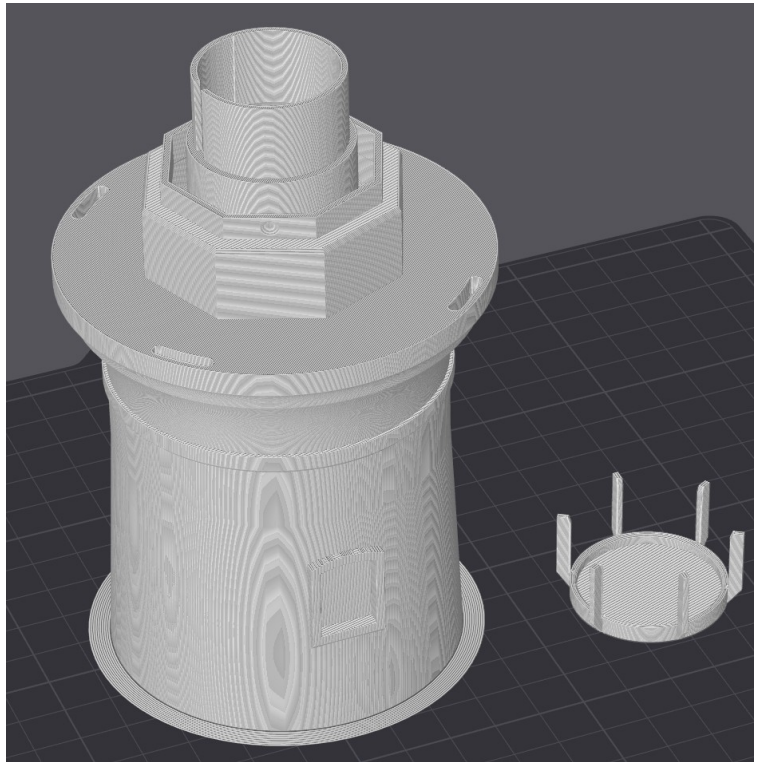


Plate 3 – activate supports for the dome, the outer areas of the dome need to be supported.

Activate brim for the railing and turn the railing upside town – flat surface onto the bed.

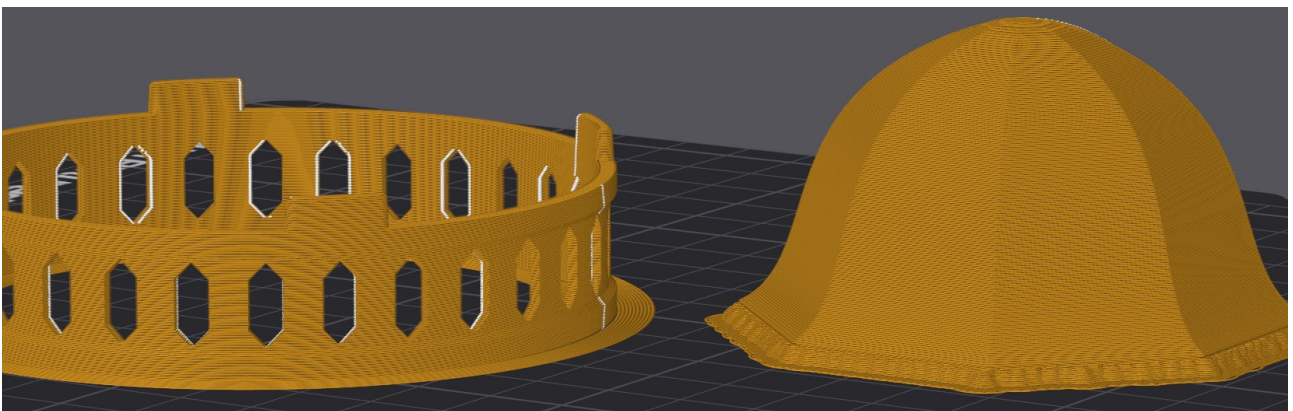


Plate 4 – use brim (the skirt on the plate around the contact area. Otherwise it might brake loose thanks to little contact are with the print bed.

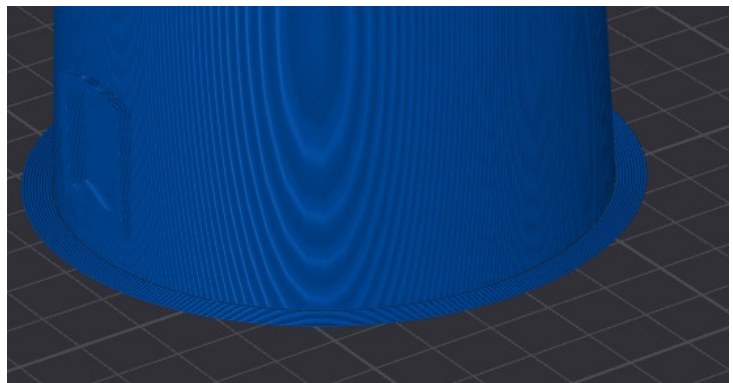


Plate 5 – place the door on its back, flat to the print bed. Use brim on the bed for the wooden structure that holds the light tank window frames.

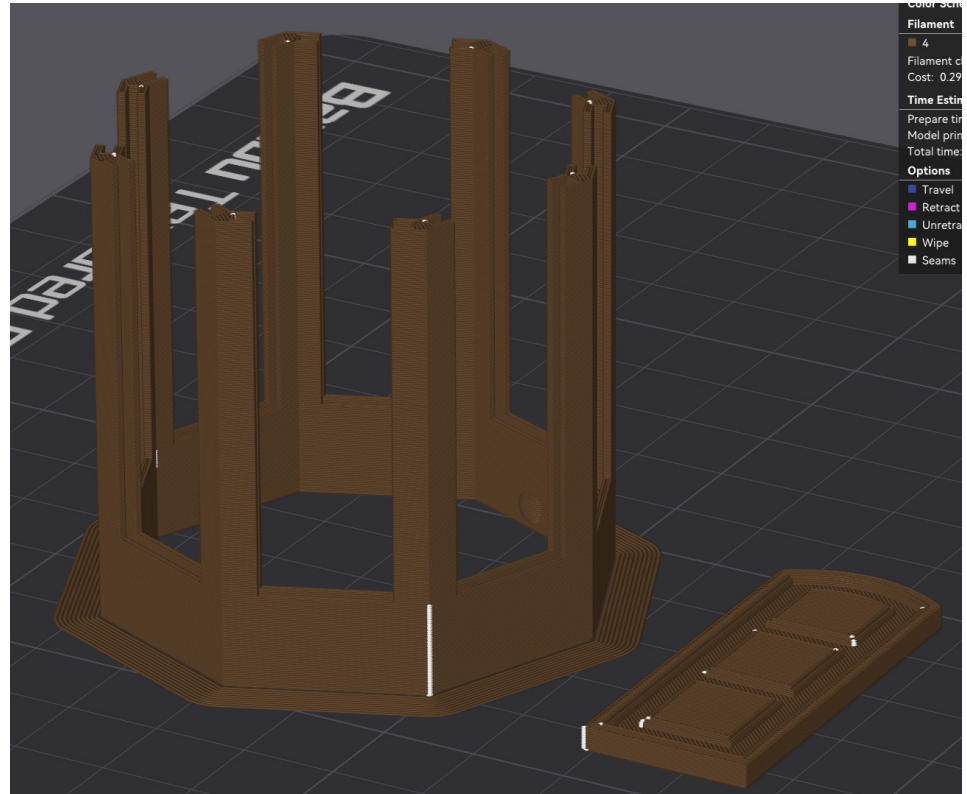


Plate 6 – but all the windows, the 4 small ones and the 8 large ones onto one bed. Their back – the flat surface, on the bed. They all use 4 layers (0,2mm layers x 4 times) with one color (white in this case) then pause – and rest with another color (brown in this case).

