


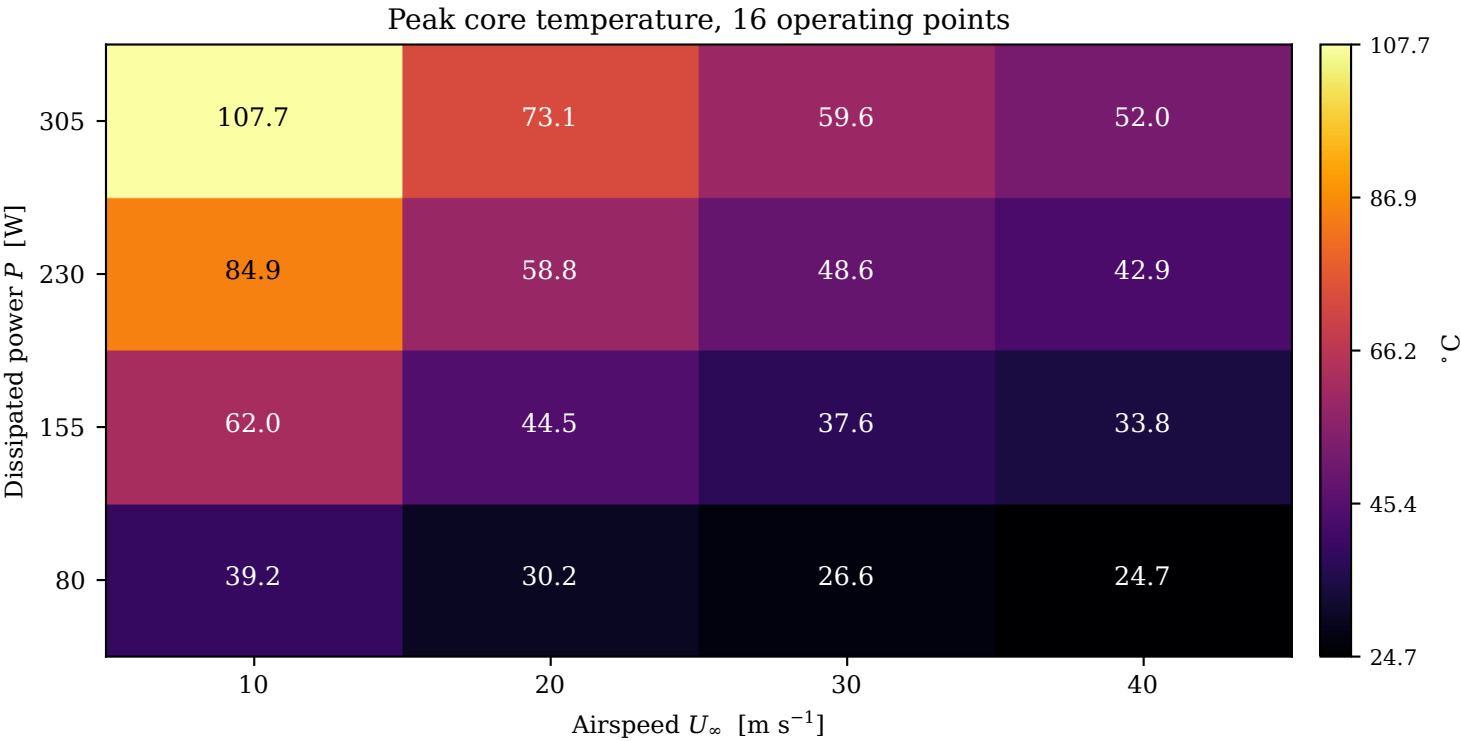

The sixteen solved points, with units

Power [W]	Airspeed [m s^{-1}]	Peak core [$^{\circ}\text{C}$]	Peak housing [$^{\circ}\text{C}$]	Core above housing [K]	Rise above inlet [K]	Margin to 200 $^{\circ}\text{C}$ on the core [K]	Numerical uncertainty [K]
80	10	39.2	38.1	+1.1	24.4	+160.8	not available
80	20	30.2	29.1	+1.1	15.3	+169.8	not available
80	30	26.6	25.5	+1.1	11.8	+173.4	not available
80	40	24.7	23.6	+1.1	9.8	+175.3	not available
155	10	62.0	60.0	+2.1	47.2	+138.0	not available
155	20	44.5	42.4	+2.1	29.6	+155.5	not available
155	30	37.6	35.5	+2.1	22.8	+162.4	not available
155	40	33.8	31.7	+2.1	18.9	+166.2	not available
230	10	84.9	81.8	+3.1	70.0	+115.1	not available
230	20	58.8	55.7	+3.1	43.9	+141.2	not available
230	30	48.6	45.5	+3.1	33.7	+151.4	not available
230	40	42.9	39.8	+3.1	28.0	+157.1	not available
305	10	107.7	103.6	+4.1	92.8	+92.3	not available
305	20	73.1	69.0	+4.1	58.3	+126.9	not available
305	30	59.6	55.4	+4.1	44.7	+140.4	not available
305	40	52.0	47.8	+4.1	37.1	+148.0	not available

Core peak shaded; the table carries both solid peaks and the margin computed on the core.