NYATI

Building: YUCCA · Tank: Overhead Tank

Society	NYATI	**Building**	YUCCA
Tank name	Overhead Tank	**Generated**	Wed, Oct 14, 2026, 14:34
Period	Last 7 days, Oct 07, 2026 - Oct 14, 2026	**Device**	ESP32, firmware 3.0.0
Usage	Domestic, overhead (roof)	**Tank**	200.0 × 100.0 × 120.0 cm, 1,000 L
Compartments	Left half 78%, Right half 64% · report: Whole tank	**Settings ID**	DC133C6C (see Settings used for this report)

SUMMARY

NOW
71%
motor off

LAST FILL
+141 L
Wed 06:00 · 36 min

EMPTY -> FULL TAKES
~ 3 h 36 min
average of 14 fills


MOTOR TODAY
36 min
1 fill(s) · 7-day avg 1 h 07 min

USED TODAY
211 L
yesterday 365 L


BUSIEST HOUR
08:00–09:00
33 L per day

LAST NIGHT
Possible leak
-35 L between 01:00–05:00

LEVEL HISTORY, LAST 7 DAYS · WHOLE TANK

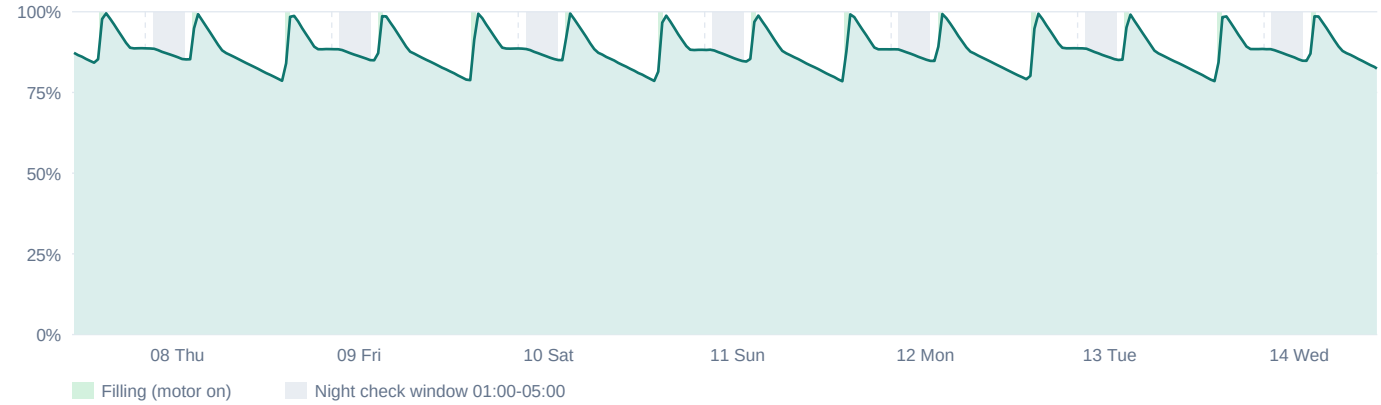


MOTOR RUN TIME PER DAY

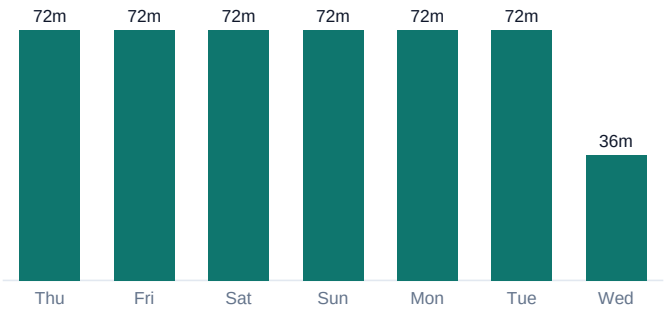

Total 7 h 48 min in 14 fills

WATER USED PER DAY

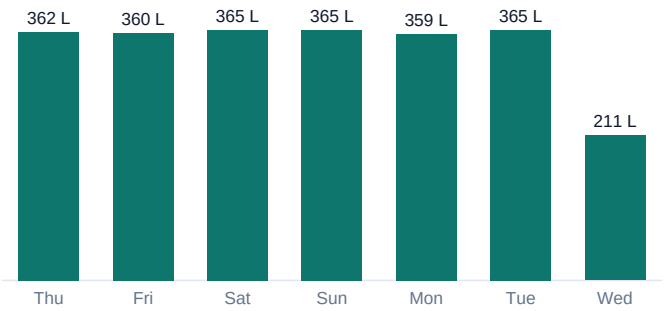

Total 2,387 L, average 341 L per day


© 2026 Chanchal Sakarde. All Rights Reserved.

Tank Analytics Report

YUCCA - Overhead Tank

woodyouloveit.com

USAGE BY HOUR OF DAY

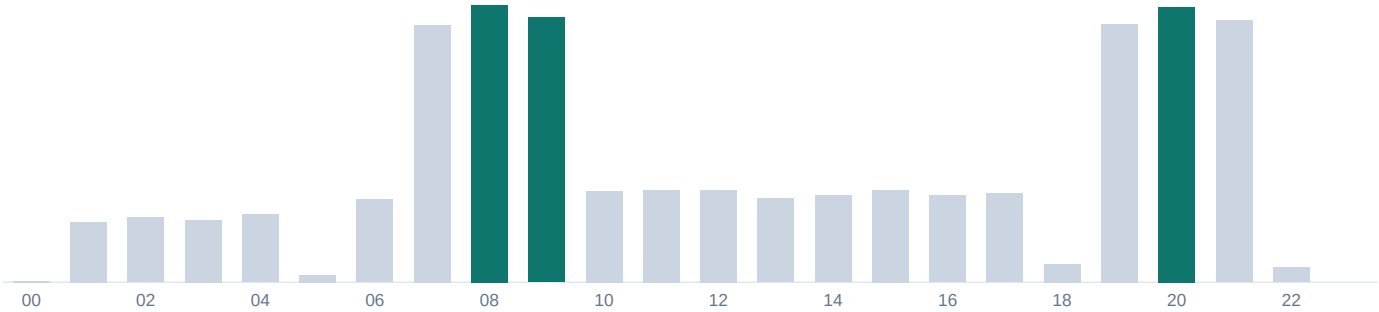

Average per day over 8 days. Busiest hours: 08:00-09:00 (10%), 20:00-21:00 (10%), 09:00-10:00 (10%).

NIGHT LEAK CHECK

Night	Change	Per hour	Result
Wed, Oct 14	-35 L	9 L	Possible leak
Tue, Oct 13	-33 L	8 L	Possible leak
Mon, Oct 12	-35 L	9 L	Possible leak
Sun, Oct 11	-33 L	8 L	Possible leak
Sat, Oct 10	-34 L	9 L	Possible leak
Fri, Oct 09	-34 L	9 L	Possible leak
Thu, Oct 08	-34 L	9 L	Possible leak

Level change between 01:00 and 05:00. Possible leak: a steady drop of 1.5 cm (15 L) or more with no fill running. Water used (one drop): most of the drop within one hour, like a tap or flush.

RECENT FILLS (MOTOR RUNS)

Started	Duration	Added	Rise speed
Wed, Oct 14, 2026, 06:00	36 min	+141 L	0.4 cm/min
Tue, Oct 13, 2026, 18:00	36 min	+202 L	0.6 cm/min
Tue, Oct 13, 2026, 06:00	36 min	+133 L	0.4 cm/min
Mon, Oct 12, 2026, 18:00	36 min	+202 L	0.6 cm/min
Mon, Oct 12, 2026, 06:00	36 min	+139 L	0.4 cm/min
Sun, Oct 11, 2026, 18:00	36 min	+200 L	0.6 cm/min
Sun, Oct 11, 2026, 06:00	36 min	+140 L	0.4 cm/min
Sat, Oct 10, 2026, 18:00	36 min	+202 L	0.6 cm/min
Sat, Oct 10, 2026, 06:00	36 min	+137 L	0.4 cm/min
Fri, Oct 09, 2026, 18:00	36 min	+205 L	0.6 cm/min

HOW THESE NUMBERS ARE CALCULATED

- Level is measured by the ultrasonic sensor and recorded every 2 minutes.
- Filling (motor on): the level rises faster than 0.5 cm/min. Fills under 3 minutes or 3 cm are ignored. Every fill is counted as the motor.
- Water used: level drops outside fills, ignoring changes smaller than the sensor noise.
- Litres use the tank capacity of 1,000 L and assume straight tank walls.

© 2026 Chanchal Sakarde. All Rights Reserved.

SETTINGS USED FOR THIS REPORT

Setting	Value
Settings ID	DC133C6C (matches the exported settings file with the same ID)
Society / building / tank	NYATI / YUCCA / Overhead Tank
Usage and location	Domestic, overhead (roof)
Tank	200.0 × 100.0 × 120.0 cm
Rated capacity	1,000 L (Left half 500 L, Right half 500 L)
Water depth when full	Left half 110.0 cm, Right half 110.0 cm
Calibration: sensor to water	Left half: empty 140.0 cm, full 30.0 cm; Right half: empty 138.0 cm, full 28.0 cm
Sensors	Left half TRIG D15 / ECHO D2, Right half TRIG D32 / ECHO D35 · LED strip: split per compartment
Figures in this report	Whole tank
Resolution	per compartment, see the dashboard
Units in this report	centimetres
Low water alarm	20% of full
Night leak check	01:00-05:00, possible leak above 1.5 cm
Fill (motor) detection	rise faster than 0.5 cm/min
Recording	level saved every 2 min, fill detection from 10 s samples
Sensor reading	every 5 s (eco profile), median of 5, trigger pulse 100 microseconds
Power and radio	power saving, transmit power medium (13 dBm), hotspot automatic
Device	ESP32, firmware 3.0.0, tank-yucca-oht.local

© 2026 Chanchal Sakarde. All Rights Reserved.