

## RGB LED Common Anode

### X-LED-RGBCA



Produced By China Young Sun LED Technology Co.LTD

Model No.: YSL-R596AR3G4B5C-C10

RED/GREEN/BLUE Triple Colour LED

### LED Chipset Absolute Maximum ratings: (Ta = 25°C)

Parameter	Symbol	Red	Green	Blue	Unit
Forward current	I <sub>F</sub>	20	20	20	mA
Peak forward current (Duty Cycle = 10, 10KHz )	I <sub>PF</sub>	30	30	30	mA
Reverse current (V <sub>R</sub> = 5V)	I <sub>R</sub>	10	10	10	μA
Operating temp	T <sub>OPR</sub>	-25~85	-25~85	-25~85	°C
Storage temp	T <sub>STG</sub>	-30~85	-30~85	-30~85	°C
Peak Emission Wavelength	λ <sub>PH</sub>	625	520	467.5	nm

\* Solder Bath : not more than 5 seconds @260 °C. The bottom ends of the plastic reflector should be at least 2mm above the solder surface

Soldering Iron: not more than 3 seconds @300 °C under 30W

### LED Chip Typical Electrical & Optical Characteristics : (Ta = 25°C)


ITEMS	Colour	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	Red	V <sub>F</sub>	I <sub>F</sub> = 20mA	1.8	2.0	2.2	V
	Green			3.0	3.2	3.4	
	Blue			3.0	3.2	3.4	
Luminous Intensity	Red	I <sub>v</sub>	I <sub>F</sub> = 20mA	---	---	800	mcd
	Green			---	---	4000	
	Blue			---	---	900	
Wavelength	Red	Δλ	I <sub>F</sub> = 20mA	620	623	625	nm
	Green			515	517.5	520	
	Blue			465	466	467.5	
Light Degredation after 1000 Hours	Red	-4.68% ~ -8.27%					
	Green	-11.37% ~ -15.30%					
	Blue	-8.23% ~ -16.81%					

## Light Degredation in mcd: ( $I_F = 20\text{mA}$ )

Hours Colours	Light Degredation in mcd after Diferent Hours					
	216 Hrs	360 Hrs	792 Hrs	1104 Hrs	1992 Hrs	2328 Hrs
Red	1.52%	-1.22%	-3.10%	-4.68%	-5.72%	-8.27%
Green	-8.02%	-9.78%	-10.25%	-11.37%	-13.79	-15.30%
Blue	3.13%	-0.33%	-3.84%	-8.23%	-14.32%	-16.81%

## Mechanical Dimensions

- All dimensions are in mm, tolerance is  $\pm 0.2\text{mm}$  unless otherwise noted
- An epoxy meniscus may extend about 1.5mm down the leads
- burr around bottom of epoxy may be 0.5mm maximum

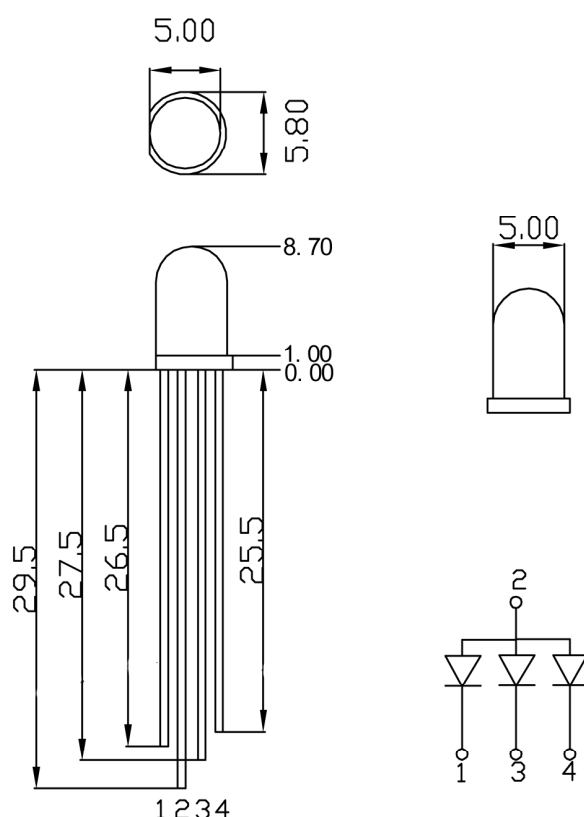

Unit: mm

Viewing Angle Drawing

