Flashover: top panel drilling template (1:1)

Looking down at the pedal. Jack wall at the top. Hammond 1590BB, 119.5 x 94 mm.
Cut along the outline, tape it to the panel, and centre-punch each cross before drilling.

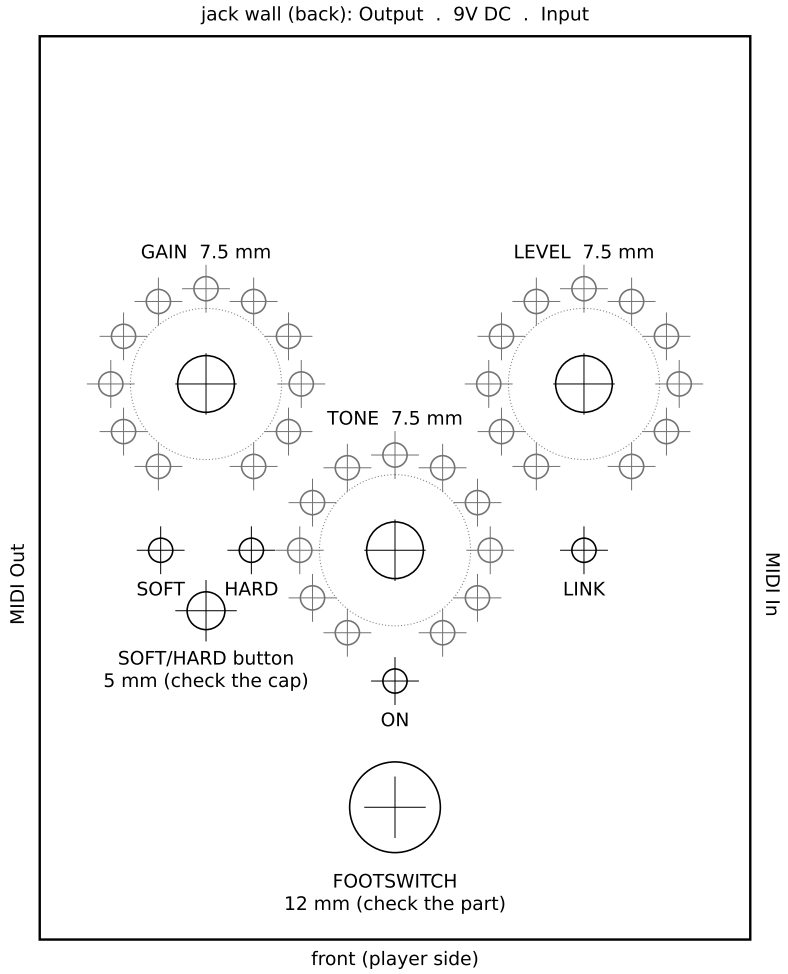

- Black circles: holes to drill, at the size written beside them. The cross marks the centre.
- Grey circles: the 33 ring LEDs, 11 around each knob. Panel holes (3.2 mm) or light pipes: not decided yet.
- Dotted circles: the largest knob (20 mm across) that still leaves the LED ring visible.
- Small LEDs (Soft, Hard, Link, On): 3.2 mm holes for 3 mm LEDs.
- Positions come from the control board file. Check them against the real board before drilling.



This line must measure exactly 100 mm. If it doesn't, reprint at 100% ("Actual size", not "Fit to page").

Flashover: jack wall drilling templates (1:1)

Each wall is drawn as you see it from OUTSIDE the box, with the panel (top) face of the box at the top.
Note the corner labels: left and right swap when you walk round the box.

Back (jack) wall: stand behind the pedal

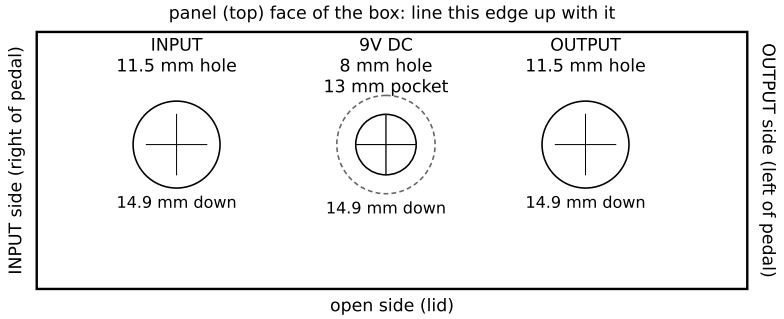

Left wall: stand at the pedal's left side

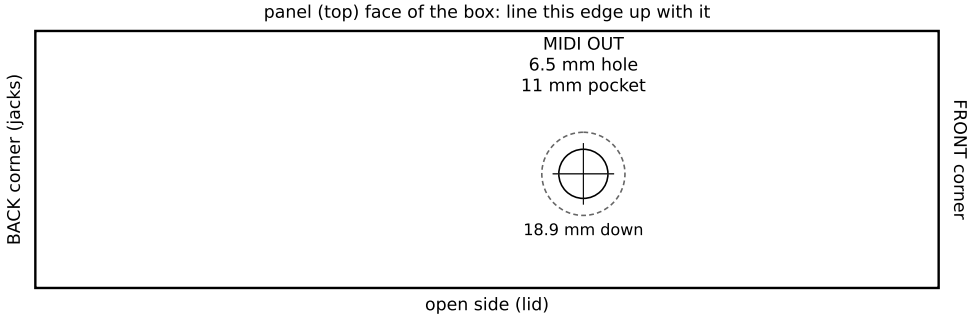

Right wall: stand at the pedal's right side

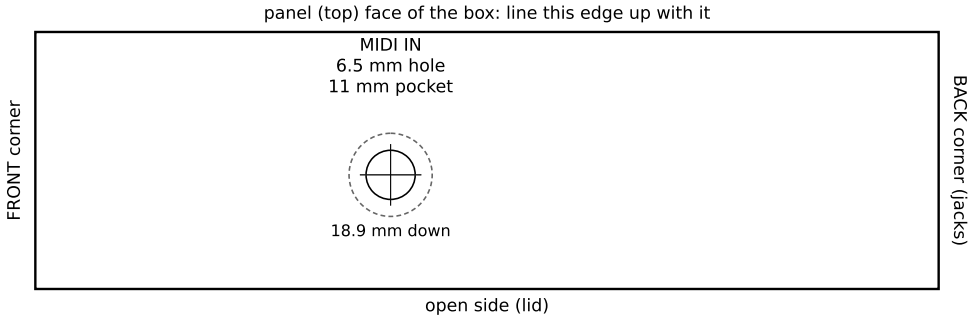

- Solid circle: the hole. Dashed circle: a shallow, flat-bottomed pocket on the OUTSIDE of the wall (DC about 2.3 mm deep, MIDI about 1.9 mm), so the plug can push fully into the jack through the thick wall. The 1/4" jacks need no pocket.
- Depths are measured from the panel (top) face of the box. The box's height and the lid are drawn approximately.
- Hole positions are from the drilling guide in FLASHOVER_STATUS.md. Check them against the real boards before drilling.



This line must measure exactly 100 mm. If it doesn't, reprint at 100% ("Actual size", not "Fit to page").