

深 圳 市 宏 盛 威 电 机 有 限 公 司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠 州 市 宏 盛 威 电 机 有 限 公 司


HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK
- 卷发棒CURLING IRON
- 家用电器HOUSEHOLD APPLIANCES
- 金融医疗FINACIAL MEDICAL
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR


06P-26

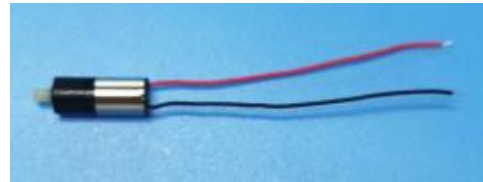

➤电机曲线图 MOTOR CURVE DIAGRAM

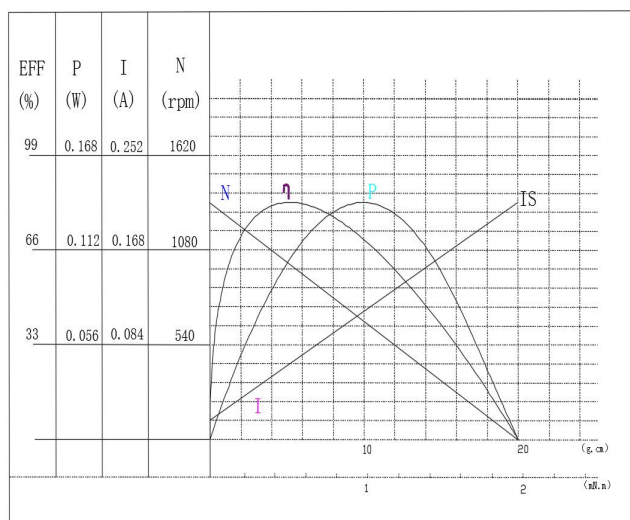

➤电机外形图 MOTOR OUTLINE DRAWING

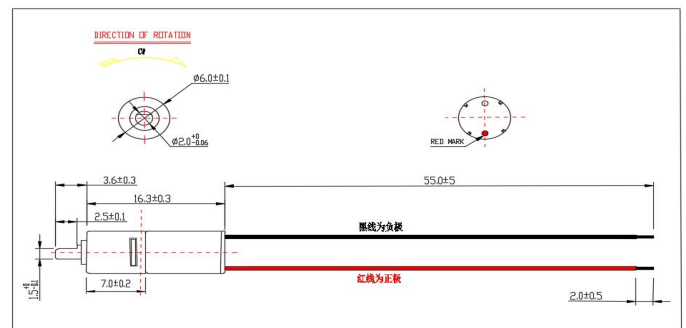

减速比: REDUCTION RATIO: 1:4.4 1:26 1:136 1:700

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE、TORQUE、CURRENT、POWER、AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR


型号 MOTEL	减速比 REDUCTION RATIO	06P-26	06P-136	06P-700
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	2.0~4.5
	额定电压 RATED VOLTAGE (V)	3.0	3.0	3.0
空载 UNLOADED	电流CURRENT (A)	0.06	0.06	0.06
	转速SPEED (rpm)	1350	260	48
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.14	0.14	0.14
	效率EFFICIENCY (%)	82.5	75	70
堵转 STALL	电流CURRENT (A)	0.21	0.21	0.21
	转矩TORQUE (g.cm)	20	90	250

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE,

LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUIDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,

QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠州市宏盛威电机有限公司


HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK
- 卷发棒CURLING IRON
- 家用电器HOUSEHOLD APPLIANCES
- 金融医疗FINACIAL MEDICAL
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR


06P-136

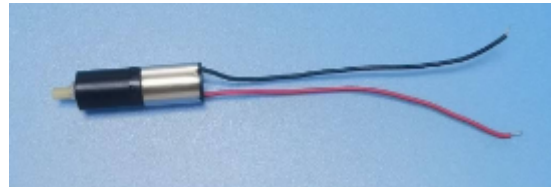

➤电机曲线图 MOTOR CURVE DIAGRAM

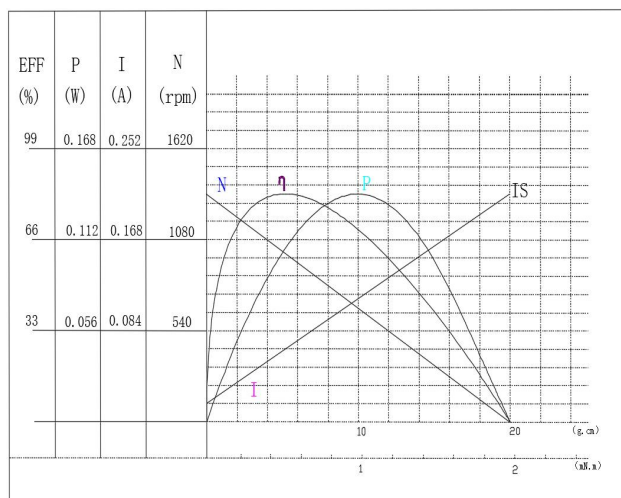

➤电机外形图 MOTOR OUTLINE DRAWING

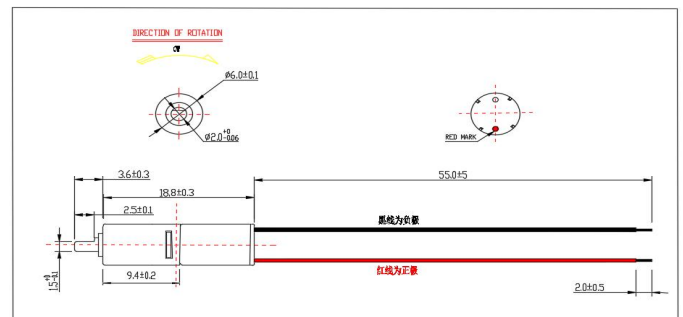

减速比: REDUCTION RATIO:

1:4.4 1:26 1:136 1:700

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE、TORQUE、CURRENT、POWER、AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR


型号 MOTEL	减速比 REDUCTION RATIO	06P-26	06P-136	06P-700
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	2.0~4.5
	额定电压 RATED VOLTAGE (V)	3.0	3.0	3.0
空载 UNLOADED	电流CURRENT (A)	0.06	0.06	0.06
	转速SPEED (rpm)	1350	260	48
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.14	0.14	0.14
	效率EFFICIENCY (%)	82.5	75	70
堵转 STALL	电流CURRENT (A)	0.21	0.21	0.21
	转矩TORQUE (g.cm)	20	90	250

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BULDING B2B, YINGZHANG INDUSTRIAL ZONE,

LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUIDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,

QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深 圳 市 宏 盛 威 电 机 有 限 公 司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠 州 市 宏 盛 威 电 机 有 限 公 司


HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK
- 卷发棒CURLING IRON
- 家用电器HOUSEHOLD APPLIANCES
- 金融医疗FINACIAL MEDICAL
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR


06P-700

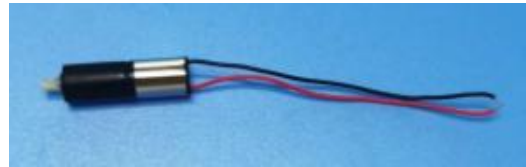

➤电机曲线图 MOTOR CURVE DIAGRAM

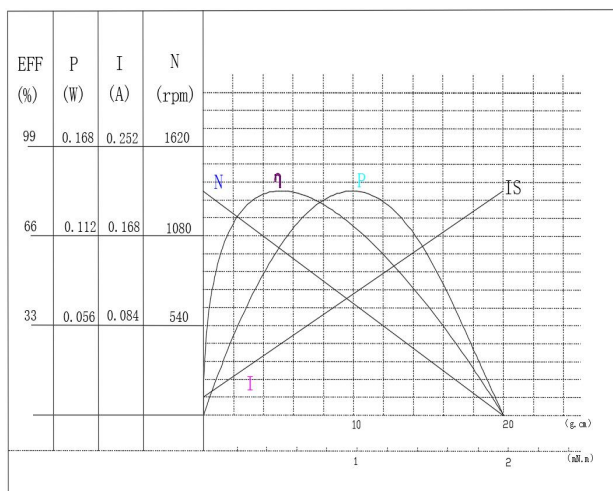

➤电机外形图 MOTOR OUTLINE DRAWING

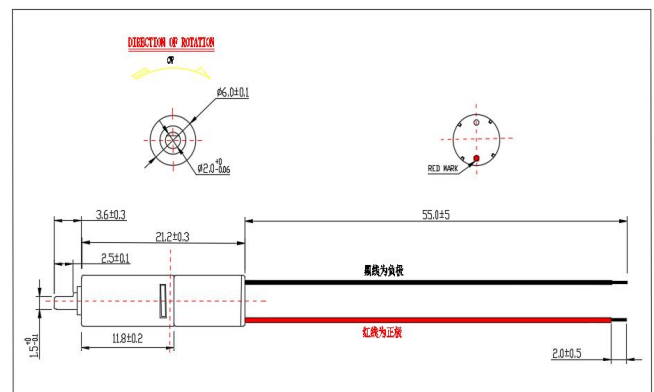

减速比: REDUCTION RATIO: 1:4.4 1:26 1:136 1:700

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE、TORQUE、CURRENT、POWER、AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 MOTEL	—— 减速比 REDUCTION RATIO	06P-26	06P-136	06P-700
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	2.0~4.5
	额定电压 RATED VOLTAGE (V)	3.0	3.0	3.0
空载 UNLOADED	电流CURRENT (A)	0.06	0.06	0.06
	转速SPEED (rpm)	1350	260	48
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.14	0.14	0.14
	效率EFFICIENCY (%)	82.5	75	70
堵转 STALL	电流CURRENT (A)	0.21	0.21	0.21
	转矩TORQUE (g. cm)	20	90	250

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE,

LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUIDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,

QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR


10GP-M10



➤电机曲线图 MOTOR CURVE DIAGRAM

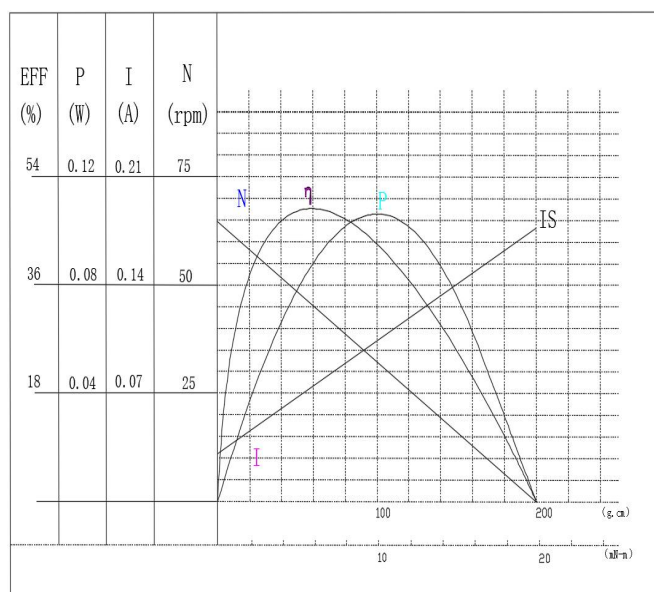

➤电机外形图 MOTOR OUTLINE DRAWING

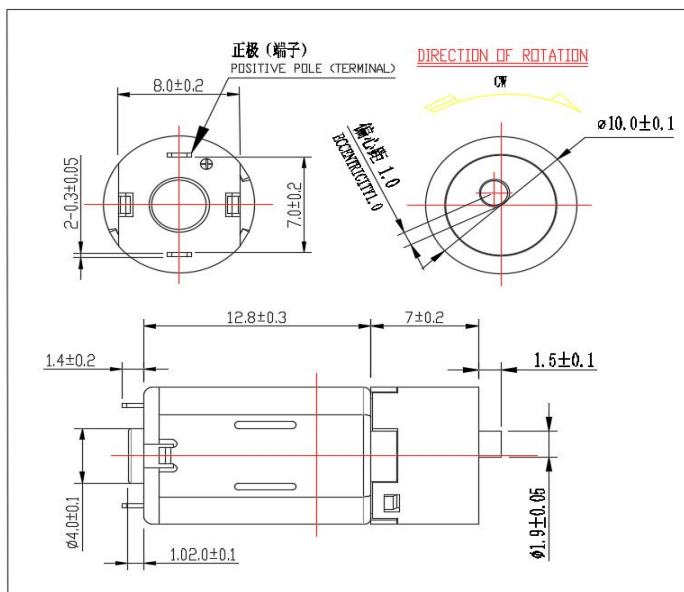

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE、TORQUE、CURRENT、POWER、AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 MOTEL	减速比 REDUCTION RATIO	06230-171	07220-171	09165-171
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	2.0~4.5
	额定电压 RATED VOLTAGE (V)	3.0	3.0	3.0
空载 UNLOADED	电流CURRENT (A)	0.035	0.04	0.08
	转速SPEED (rpm)	65	72	95
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.11	0.17	0.34
	效率EFFICIENCY (%)	49.4	54.3	58.1
堵转 STALL	电流CURRENT (A)	0.18	0.27	0.57
	转矩TORQUE (g.cm)	200	260	460

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BULDING B2B, YINGZHANG INDUSTRIAL ZONE, LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUIDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE, QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA

深 圳 市 宏 盛 威 电 机 有 限 公 司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠 州 市 宏 盛 威 电 机 有 限 公 司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT

直流減速电机 DC DECELERATION MOTOR


10GP-M10



➤ 电机曲线图 MOTOR CURVE DIAGRAM

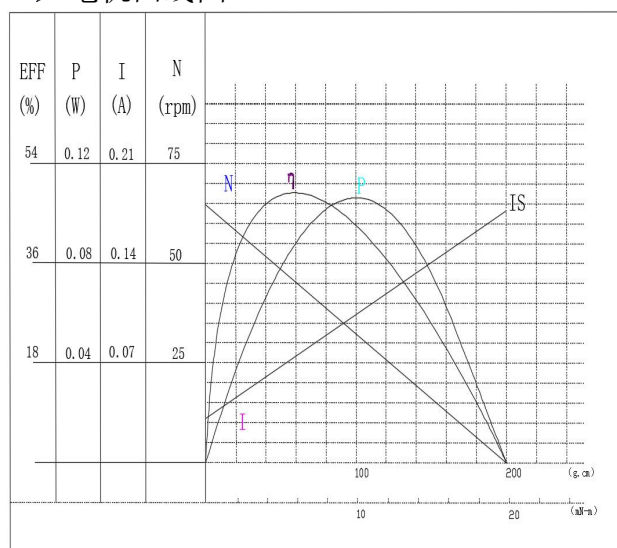

► 电机外形图 MOTOR OUTLINE DRAWING

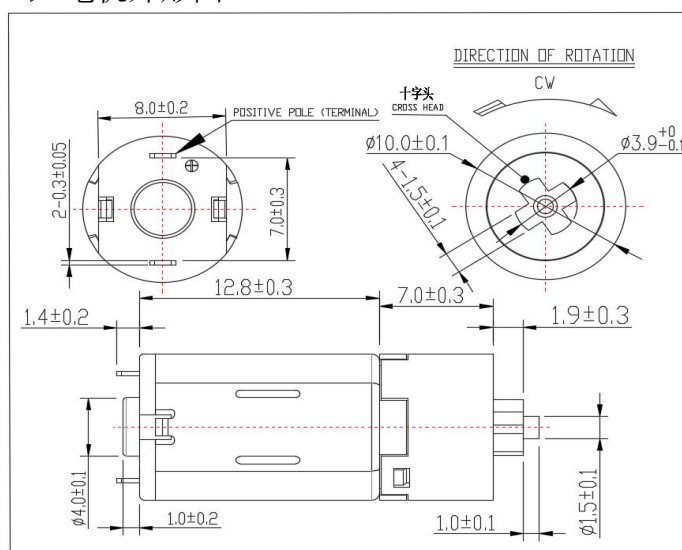

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

► 减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 — 减速比 MOTEL — REDUCTION RATIO		06230-171	07220-171	09165-171
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	2.0~4.5
	额定电压 RATED VOLTAGE (V)	3.0	3.0	3.0
空载 UNLOADED	电流CURRENT (A)	0.035	0.04	0.08
	转速SPEED (rpm)	65	72	95
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.11	0.17	0.34
	效率EFFICIENCY (%)	49.4	54.3	58.1
堵转 STALL	电流CURRENT (A)	0.18	0.27	0.57
	转矩TORQUE (g. cm)	200	260	460

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BULDING B2B, YINGZHANG INDUSTRIAL ZONE,
LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUILDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,
QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV. CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR


10GP-M20



电机曲线图 MOTOR CURVE DIAGRAM

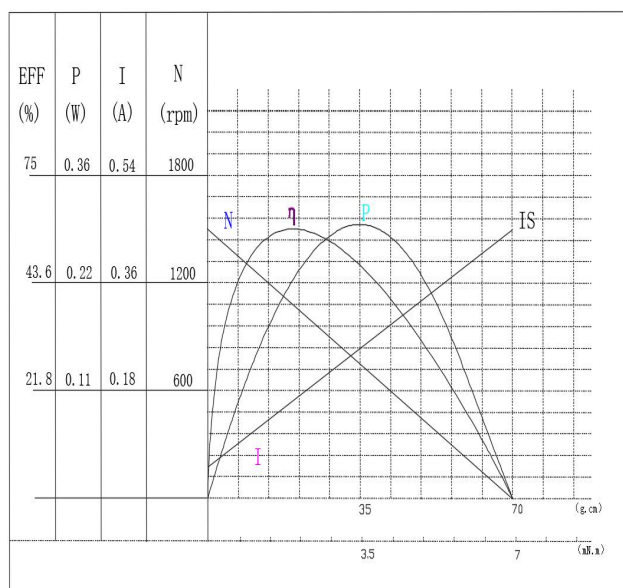

电机外形图 MOTOR OUTLINE DRAWING

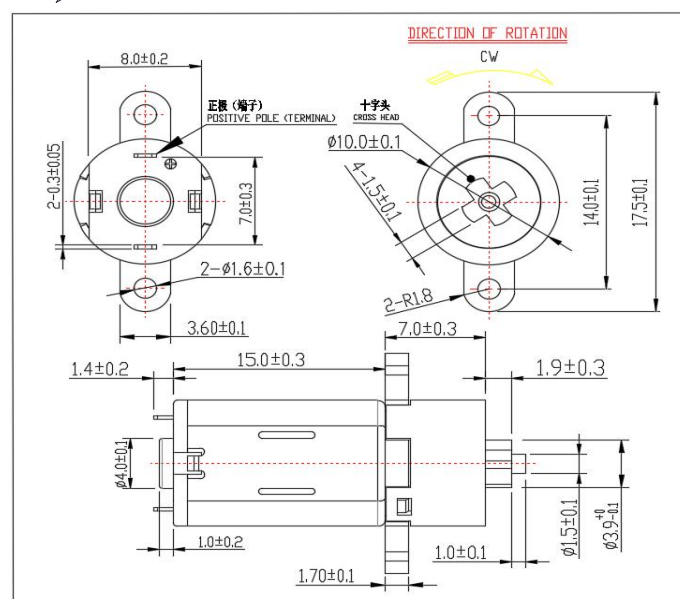

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制


VOLTAGE、TORQUE、CURRENT、POWER、AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 — 减速比 MOTEL REDUCTION RATIO		07152-9.5	07152-171	——
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	——
	额定电压 RATED VOLTAGE (V)	3.7	3.7	——
空载 UNLOADED	电流CURRENT (A)	0.05	0.05	——
	转速SPEED (rpm)	1500	85	——
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.28	0.30	——
	效率EFFICIENCY (%)	54.5	62.8	——
堵转 STALL	电流CURRENT (A)	0.45	0.45	——
	转矩TORQUE (g. cm)	70	400	——

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BULDING B2B, YINGZHANG INDUSTRIAL ZONE,
LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUIDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,
QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO.,LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO.,LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR


12GB-N10



➤电机曲线图 MOTOR CURVE DIAGRAM

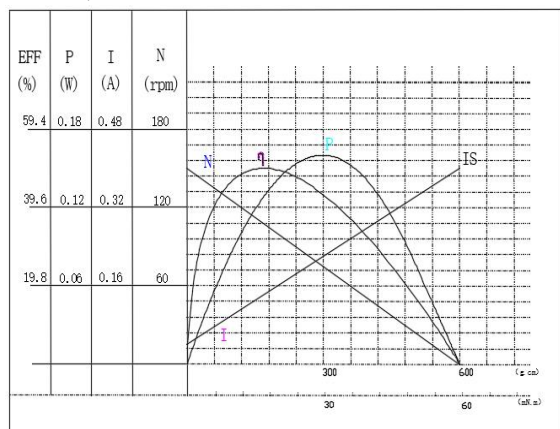

➤电机外形图 MOTOR OUTLINE DRAWING

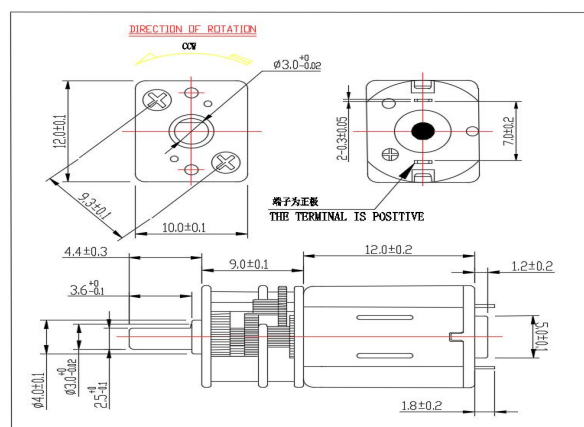

减速比: REDUCTION RATIO:

減速比: REDUCTION RATIO:				1:3	1:5	1:5.3	1:7.5	1:10	1:11	1:15	1:17	1:20	1:25	1:30
1:31	1:35	1:43	1:47	1:50	1:60	1:63	1:65	1:74	1:75	1:77	1:91	1:98	1:99	1:100
1:101	1:106	1:107	1:110	1:113	1:114	1:117	1:130	1:145	1:148	1:150	1:160	1:168	1:174	1:183
1:194	1:196	1:200	1:210	1:216	1:218	1:230	1:233	1:240	1:247	1:248	1:250	1:255	1:284	1:289
1:299	1:330	1:340	1:379	1:380	1:422	1:439								

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 MOTEL	减速比 REDUCTION RATIO	08230-100	12112-100	1380-100
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	2.0~4.5
	额定电压 RATED VOLTAGE (V)	3.7	3.7	3.7
空载 UNLOADED	电流CURRENT (A)	0.04	0.12	0.18
	转速SPEED (rpm)	150	295	380
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.16	0.81	1.22
	效率EFFICIENCY (%)	49.5	52.5	50.4
堵转 STALL	电流CURRENT (A)	0.4	1.54	2.6
	转矩TORQUE (g. cm)	600	1000	1200

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE,

LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUIDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,

QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠 州 市 宏 盛 威 电 机 有 限 公 司


HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR

12GB-N10

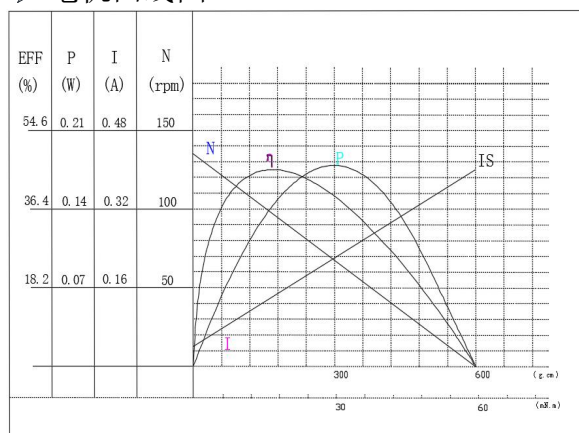

► 电机外形图 MOTOR OUTLINE DRAWING

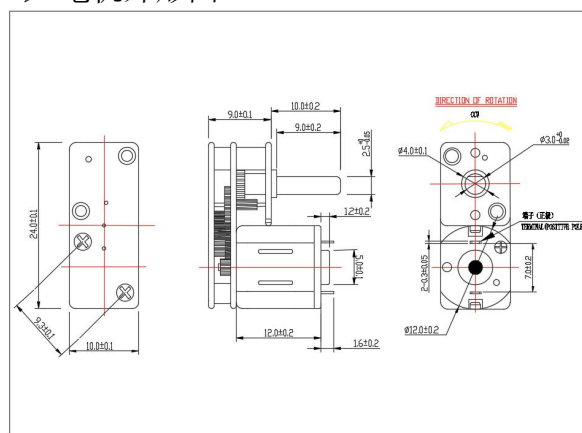

減速比: REDUCTION RATIO:

1:84	1:100	1:103	1:105	1:110	1:111	1:133	1:150	1:156	1:165	1:168	1:183	1:210	1:220	1:231
1:250	1:258	1:298	1:305	1:323	1:350	1:380	1:422	1:482	1:500	1:567	1:691	1:786	1:1000	1:1300
1:2000														

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制


VOLTAGE、 TORQUE、 CURRENT、 POWER、 AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

► 减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 MOTEL	减速比 REDUCTION RATIO	08230-110	12112-110	1380-110
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	2.0~4.5
	额定电压 RATED VOLTAGE (V)	3.7	3.7	3.7
空载 UNLOADED	电流CURRENT (A)	0.04	0.12	0.15
	转速SPEED (rpm)	135	178	350
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.18	0.86	1.2
	效率EFFICIENCY (%)	45.5	53.8	48
堵转 STALL	电流CURRENT (A)	0.4	1.54	2.6
	转矩TORQUE (g. cm)	600	1100	1300

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BULDING B2B, YINGZHANG INDUSTRIAL ZONE,
LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUILDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,
QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV. CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR


12GB-N20



➤电机曲线图 MOTOR CURVE DIAGRAM

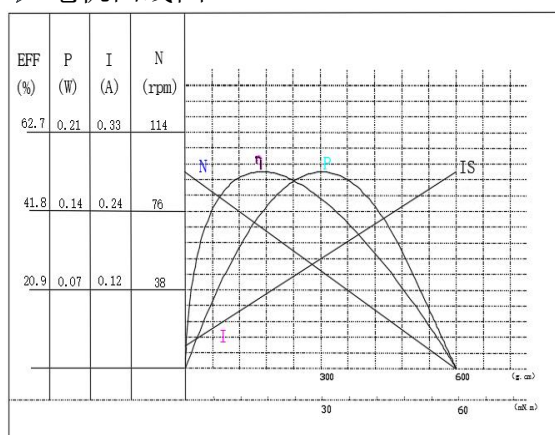

➤电机外形图 MOTOR OUTLINE DRAWING

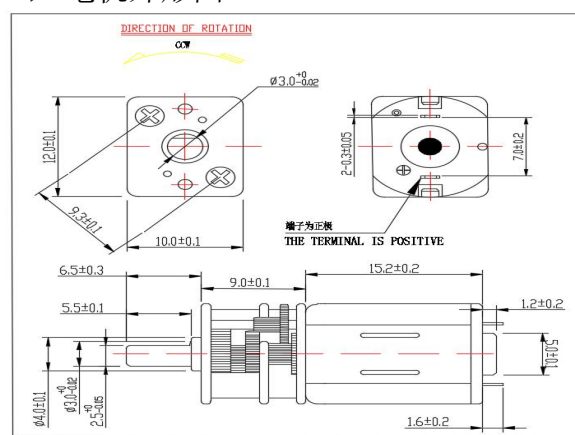

减速比: REDUCTION RATIO:

1:3	1:5	1:5.3	1:7.5	1:10	1:11	1:15	1:17	1:20	1:25	1:30
1:31	1:35	1:43	1:47	1:50	1:60	1:63	1:65	1:74	1:75	1:77
1:91	1:98	1:99	1:100	1:101	1:106	1:107	1:110	1:113	1:114	1:117
1:130	1:145	1:148	1:150	1:160	1:168	1:174	1:183	1:194	1:196	1:200
1:210	1:216	1:218	1:230	1:233	1:240	1:247	1:248	1:250	1:255	1:284
1:289	1:299	1:330	1:340	1:379	1:380	1:422	1:439			

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR


型号 — 减速比 MOTEL REDUCTION RATIO		08230-100	12112-100	1380-100
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	2.0~4.5
	额定电压 RATED VOLTAGE (V)	3.7	3.7	3.7
空载 UNLOADED	电流CURRENT (A)	0.03	0.06	0.1
	转速SPEED (rpm)	95	195	265
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.175	0.59	0.89
	效率EFFICIENCY (%)	52.3	54.3	53.7
堵转 STALL	电流CURRENT (A)	0.3	1.54	2.0
	转矩TORQUE (g. cm)	600	1100	1300

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE,

LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUIDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,

QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR


12GB-N20



电机曲线图 MOTOR CURVE DIAGRAM

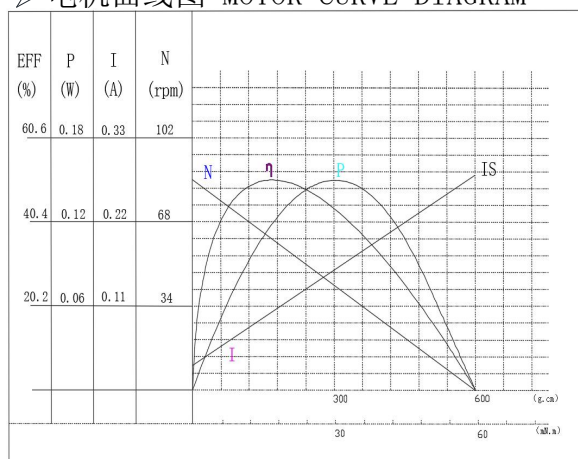

电机外形图 MOTOR OUTLINE DRAWING

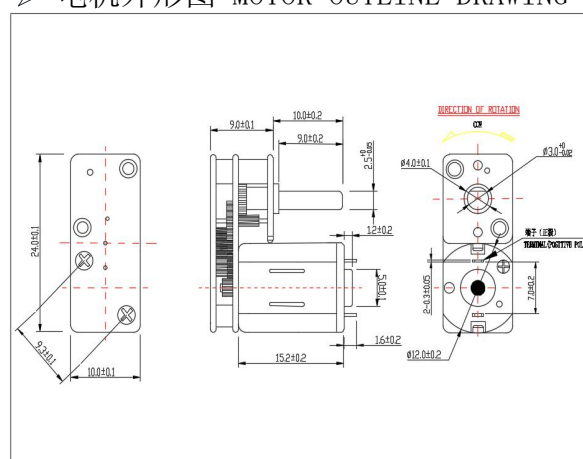

减速比: REDUCTION RATIO:

1:10 1:15 1:20 1:26 1:30 1:34 1:42 1:50 1:63 1:70 1:78

1:84 1:100 1:103 1:105 1:110 1:111 1:133 1:150 1:156 1:165 1:168 1:183 1:210 1:220 1:231

1:250 1:258 1:298 1:305 1:323 1:350 1:380 1:422 1:482 1:500 1:567 1:691 1:786 1:1000 1:1300

1:2000

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 — 减速比 MOTEL REDUCTION RATIO		08230-110	12112-110	1380-110
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	2.0~4.5
	额定电压 RATED VOLTAGE (V)	3.7	3.7	3.7
空载 UNLOADED	电流CURRENT (A)	0.03	0.06	0.09
	转速SPEED (rpm)	85	180	250
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.15	0.5	0.75
	效率EFFICIENCY (%)	50.5	57.2	53.1
堵转 STALL	电流CURRENT (A)	0.28	1.2	2.0
	转矩TORQUE (g. cm)	600	1200	1400

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE,

LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUIDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,

QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA

深 圳 市 宏 盛 威 电 机 有 限 公 司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠 州 市 宏 盛 威 电 机 有 限 公 司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD


——典型应用 TYPICAL APPLICATIONS

- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT


直流减速电机 DC DECELERATION MOTOR



➤ 电机曲线图 MOTOR CURVE DIAGRAM

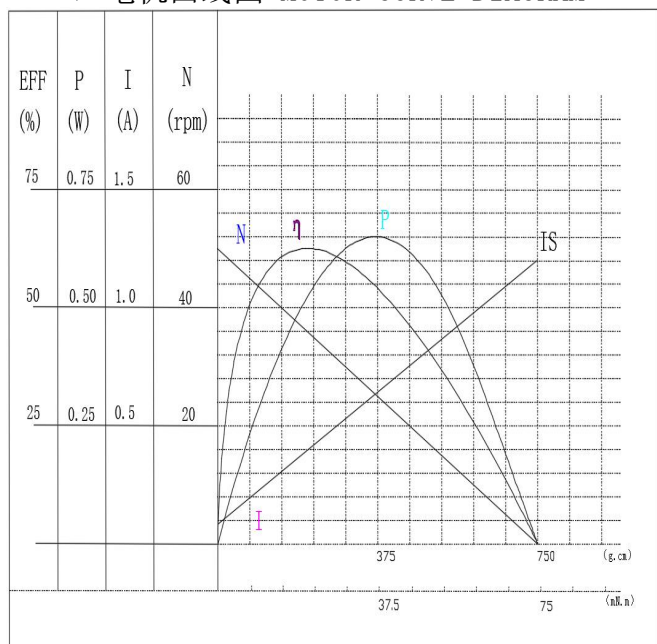

➤ 电机外形图 MOTOR OUTLINE DRAWING

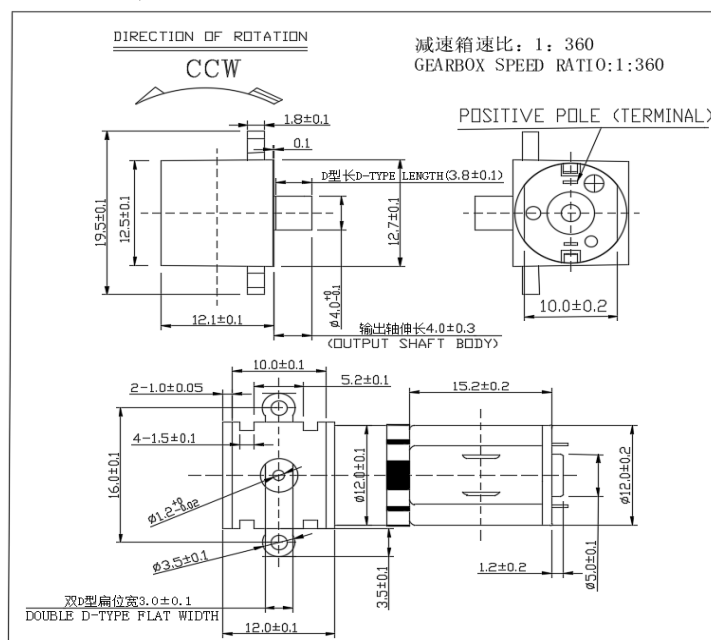

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制


VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIREMENTS

► 減速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 MOTEL		N20-08230	N20-12112	N20-1380
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~5.0	2.0~5.0	2.0~5.0
	额定电压 RATED VOLTAGE (V)	3.7	3.7	3.7
空载 UNLOADED	电流CURRENT (A)	0.04	0.08	0.1
	转速SPEED (rpm)	25	50	65
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.22	0.65	0.77
	效率EFFICIENCY (%)	54.6	62.5	42.9
堵转 STALL	电流CURRENT (A)	0.27	1.25	2.35
	转矩TORQUE (g. cm)	480	750	650

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE,
LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUILDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,
QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV. CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD


——典型应用 TYPICAL APPLICATIONS

- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT


直流减速电机 DC DECELERATION MOTOR



➤电机曲线图 MOTOR CURVE DIAGRAM

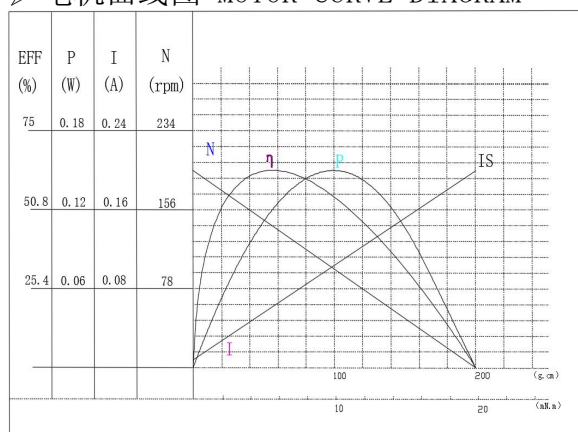

➤电机外形图 MOTOR OUTLINE DRAWING

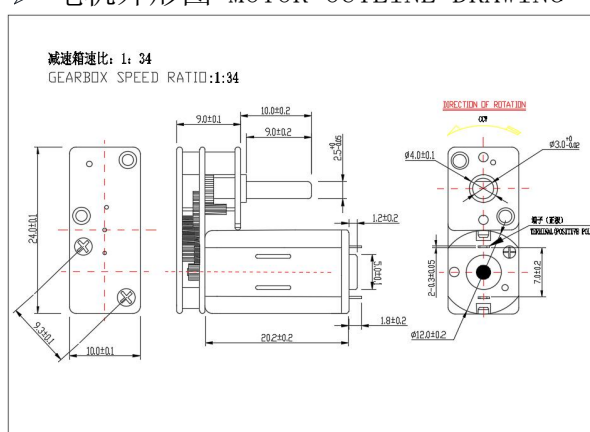

减速比: REDUCTION RATIO:

1:10	1:15	1:20	1:26	1:30	1:34	1:42	1:50	1:63	1:70	1:78
1:110	1:111	1:133	1:150	1:156	1:165	1:168	1:183	1:210	1:220	1:231
1:323	1:350	1:380	1:422	1:482	1:500	1:567	1:691	1:786	1:1000	1:1300

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE、TORQUE、CURRENT、POWER、AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 MOTEL		N30-08200	N30-12112	N30-1380
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	2.0~4.5
	额定电压 RATED VOLTAGE (V)	3.7	3.7	3.7
空载 UNLOADED	电流CURRENT (A)	0.02	0.05	0.07
	转速SPEED (rpm)	195	360	485
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.15	0.43	0.58
	效率EFFICIENCY (%)	63.5	65.8	62.5
堵转 STALL	电流CURRENT (A)	0.2	0.8	1.3
	转矩TORQUE (g. cm)	200	800	900

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE,

LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUIDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,

QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK
- 卷发棒CURLING IRON
- 家用电器HOUSEHOLD APPLIANCES
- 金融医疗FINACIAL MEDICAL
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR


16GP-030



电机曲线图 MOTOR CURVE DIAGRAM

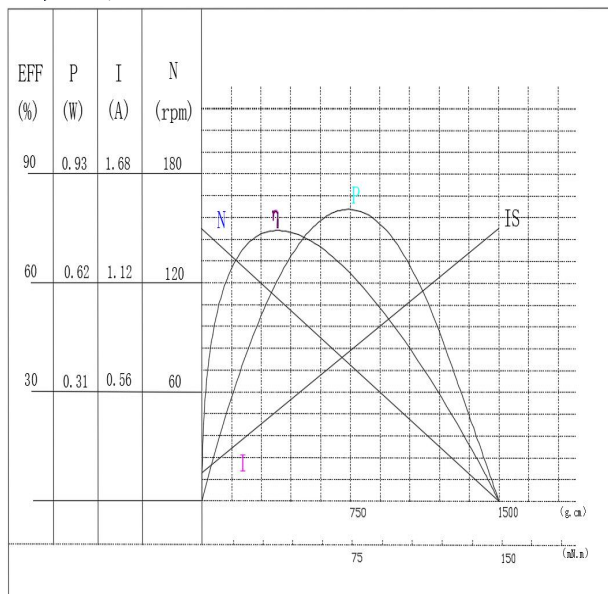

电机外形图 MOTOR OUTLINE DRAWING

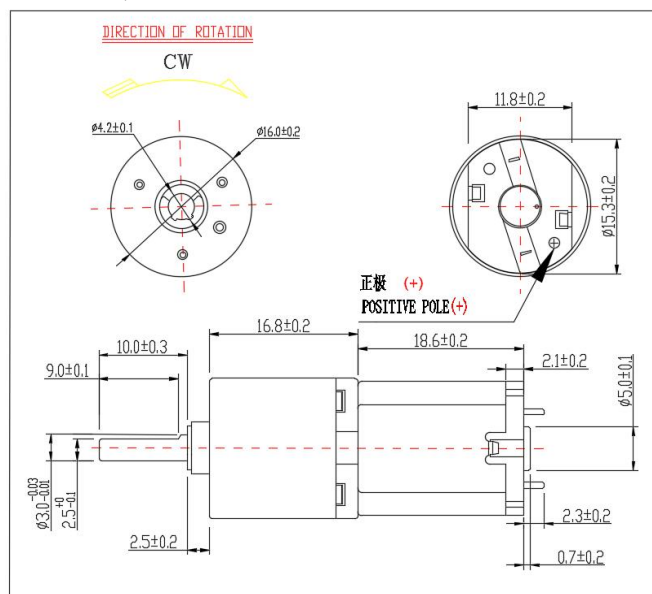

减速比: REDUCTION RATIO: 1:96 1:144 1:216

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR


型号 MOTEL	减速比 REDUCTION RATIO	13102-96	13102-144	13102-216
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	9.0~15.0	9.0~15.0	3.0~4.5
	额定电压 RATED VOLTAGE (V)	3.7	3.7	3.7
空载 UNLOADED	电流CURRENT (A)	0.15	0.15	0.15
	转速SPEED (rpm)	150	105	70
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.78	0.78	0.78
	效率EFFICIENCY (%)	75	75	75
堵转 STALL	电流CURRENT (A)	1.4	1.4	1.4
	转矩TORQUE (g. cm)	1500	2000	2500

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE,

LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUILDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,

QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO.,LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO.,LTD

——典型应用 TYPICAL APPLICATIONS


- 卷发棒CURLING IRON
- 家用电器HOUSEHOLD APPLIANCES
- 金融医疗FINACIAL MEDICAL
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR


16GP-030



➤ 电机曲线图 MOTOR CURVE DIAGRAM

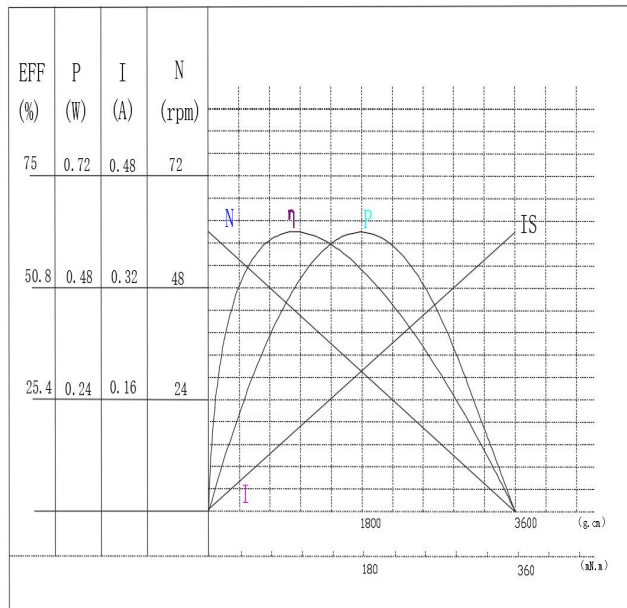

➤ 电机外形图 MOTOR OUTLINE DRAWING

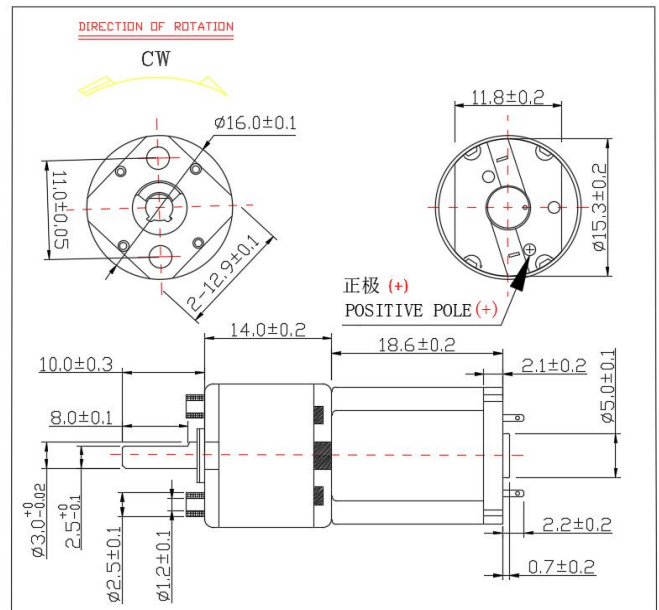

减速比: REDUCTION RATIO:

1:18	1:21	1:31	1:40	1:74	1:88	1:105	1:133	1:158	1:200
------	------	------	------	------	------	-------	-------	-------	-------

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤ 减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR


型号 MOTEL	减速比 REDUCTION RATIO	07385-200	08310-200	13115-200
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	9.0~15.0	9.0~15.0	3.0~4.5
	额定电压 RATED VOLTAGE (V)	12.0	12.0	3.7
空载 UNLOADED	电流CURRENT (A)	0.05	0.06	0.10
	转速SPEED (rpm)	60	75	60
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.6	0.9	0.6
	效率EFFICIENCY (%)	47.4	52.1	44.6
堵转 STALL	电流CURRENT (A)	0.4	0.53	1.4
	转矩TORQUE (g.cm)	3600	3600	3200

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE,

LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUILDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,

QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT:
- 眼部按摩器EYE MASSAGER:

直流减速电机 DC DECELERATION MOTOR


20GP-130



➤电机曲线图 MOTOR CURVE DIAGRAM

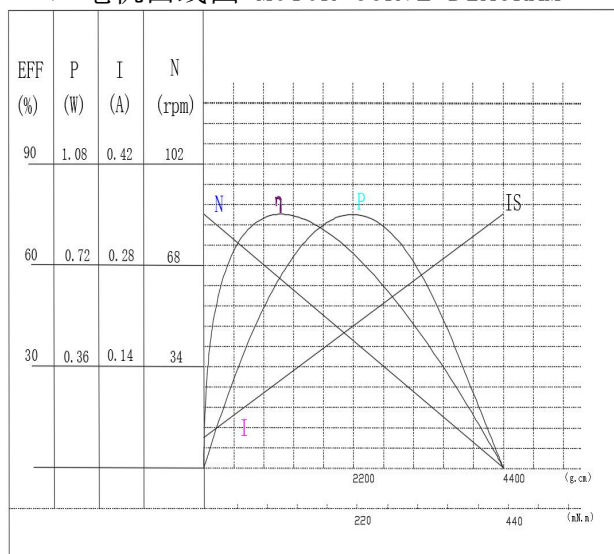

➤电机外形图 MOTOR OUTLINE DRAWING

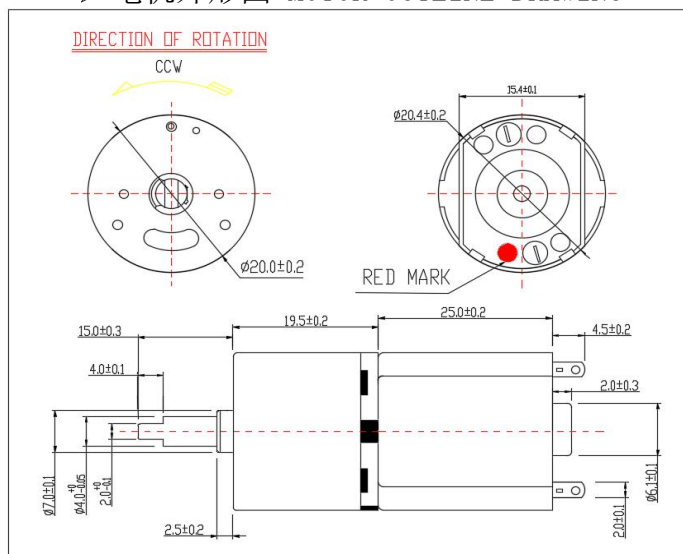

减速比: REDUCTION RATIO: 1:14 1:23 1:29 1:55 1:75 1:126 1:158

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 — 减速比 MOTEL — REDUCTION RATIO		08530-75	08530-126	08530-158
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	12.0~16.0	12.0~16.0	12.0~16.0
	额定电压 RATED VOLTAGE (V)	15.0	15.0	15.0
空载 UNLOADED	电流CURRENT (A)	0.045	0.045	0.045
	转速SPEED (rpm)	85	50	40
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.90	0.90	0.90
	效率EFFICIENCY (%)	75	75	75
堵转 STALL	电流CURRENT (A)	0.35	0.35	0.35
	转矩TORQUE (g. cm)	4400	5800	7500

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE, LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUILDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE, QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深 圳 市 宏 盛 威 电 机 有 限 公 司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠 州 市 宏 盛 威 电 机 有 限 公 司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 卷发棒: CURLING IRON
- 家用电器HOUSEHOLD APPLIANCES
- 金融医疗FINACIAL MEDICAL
- 工业设备INDUSTRIAL EQUIPMENT
- 眼部按摩器EYE MASSAGER

直流减速电机 DC DECELERATION MOTOR


20GP-130



➤ 电机曲线图 MOTOR CURVE DIAGRAM

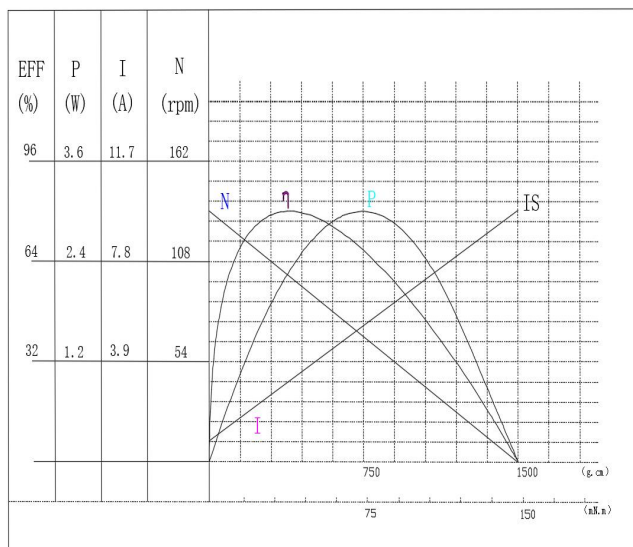

➤ 电机外形图 MOTOR OUTLINE DRAWING

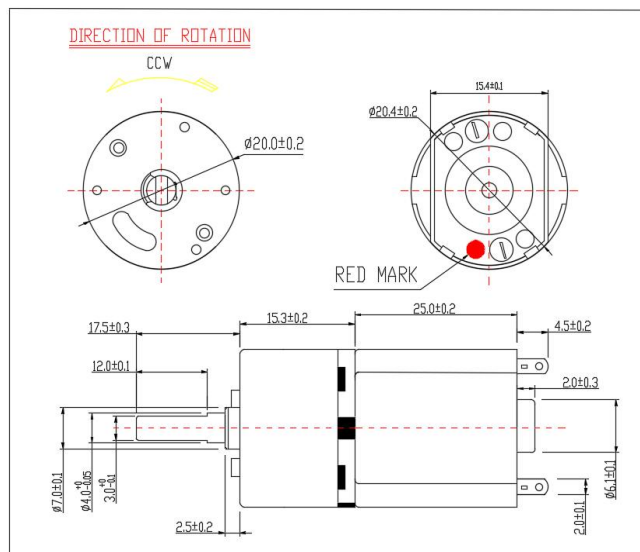

减速比: REDUCTION RATIO: 1:14 1:23 1:29

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE、TORQUE、CURRENT、POWER、AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤ 减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 — 减速比 MOTEL — REDUCTION RATIO		2845-14	2845-23	2845-29
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	2.0~4.5
	额定电压 RATED VOLTAGE (V)	3.7	3.7	3.7
空载 UNLOADED	电流CURRENT (A)	0.8	0.8	0.8
	转速SPEED (rpm)	1350	780	620
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	3.0	3.0	3.0
	效率EFFICIENCY (%)	80	80	80
堵转 STALL	电流CURRENT (A)	9.8	9.8	9.8
	转矩TORQUE (g. cm)	1500	2200	2800

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BULDING B2B, YINGZHANG INDUSTRIAL ZONE, LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUIDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE, QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT:
- 眼部按摩器EYE MASSAGER:

直流减速电机 DC DECELERATION MOTOR


20GP-130



➤电机曲线图 MOTOR CURVE DIAGRAM

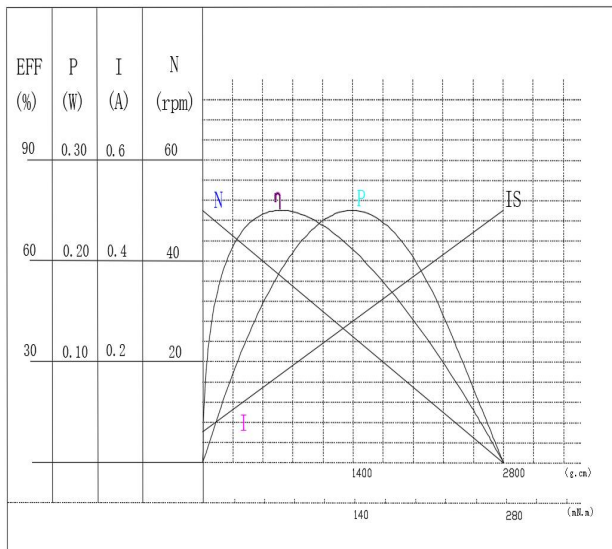

➤电机外形图 MOTOR OUTLINE DRAWING

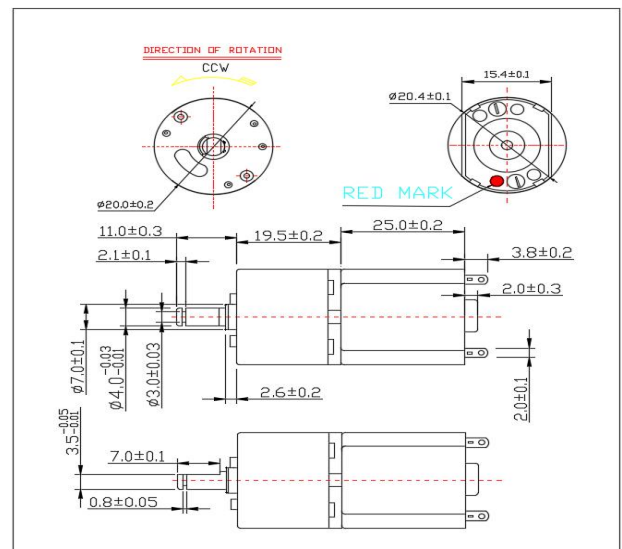

减速比: REDUCTION RATIO: 1:14 1:23 1:29 1:55 1:85 1:126 1:158

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制


VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 — 减速比 MOTEL — REDUCTION RATIO		12250-85	12250-126	12250-158
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	3.0~6.0	3.0~6.0	3.0~6.0
	额定电压 RATED VOLTAGE (V)	4.5	4.5	4.5
空载 UNLOADED	电流CURRENT (A)	0.06	0.06	0.06
	转速SPEED (rpm)	50	30	25
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	0.25	0.25	0.26
	效率EFFICIENCY (%)	75	75	75
堵转 STALL	电流CURRENT (A)	0.5	0.5	0.5
	转矩TORQUE (g.cm)	2800	4000	6000

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE, LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUILDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE, QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深 圳 市 宏 盛 威 电 机 有 限 公 司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠 州 市 宏 盛 威 电 机 有 限 公 司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 智能锁SMART LOCK:
- 家用电器HOUSEHOLD APPLIANCES:
- 金融医疗FINACIAL MEDICAL:
- 工业设备INDUSTRIAL EQUIPMENT

直流减速电机 DC DECELERATION MOTOR


24GP-370



➤电机曲线图 MOTOR CURVE DIAGRAM

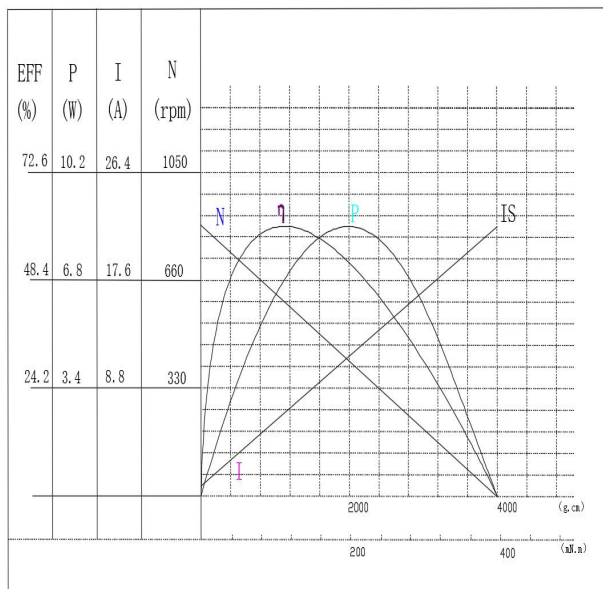

➤电机外形图 MOTOR OUTLINE DRAWING

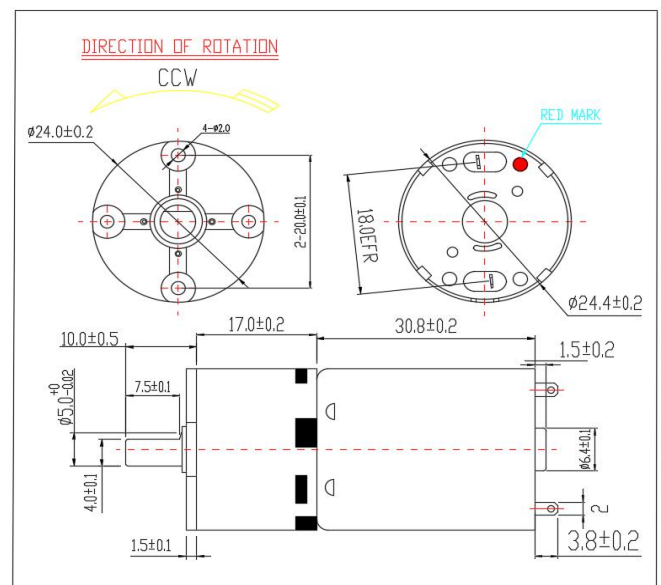

减速比: REDUCTION RATIO: 1:4.2 1:5 1:6.3 1:17.6 1:21 1:25 1:26.6 1:31.6 1:40.1

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIEMENTS

➤减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 MOTEL	—— 减速比 REDUCTION RATIO	4027-5	4027-25	——
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	2.0~4.5	2.0~4.5	——
	额定电压 RATED VOLTAGE (V)	3.7	3.7	——
空载 UNLOADED	电流CURRENT (A)	0.8	0.8	——
	转速SPEED (rpm)	4000	830	——
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	8.5	8.5	——
	效率EFFICIENCY (%)	90	80	——
堵转 STALL	电流CURRENT (A)	22	22	——
	转矩TORQUE (g. cm)	1200	4000	——

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BULDING B2B, YINGZHANG INDUSTRIAL ZONE,

LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUIDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,

QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 电动清洁刷 ELECTRIC CLEANING BRUSH
- 家用电器 HOUSEHOLD APPLIANCES
- 电动搅拌机 ELECTRIC MIXER
- 工业设备 INDUSTRIAL EQUIPMENT
- 按摩器 MASSAGER

直流减速电机 DC DECELERATION MOTOR


36GP-390



➤ 电机曲线图 MOTOR CURVE DIAGRAM

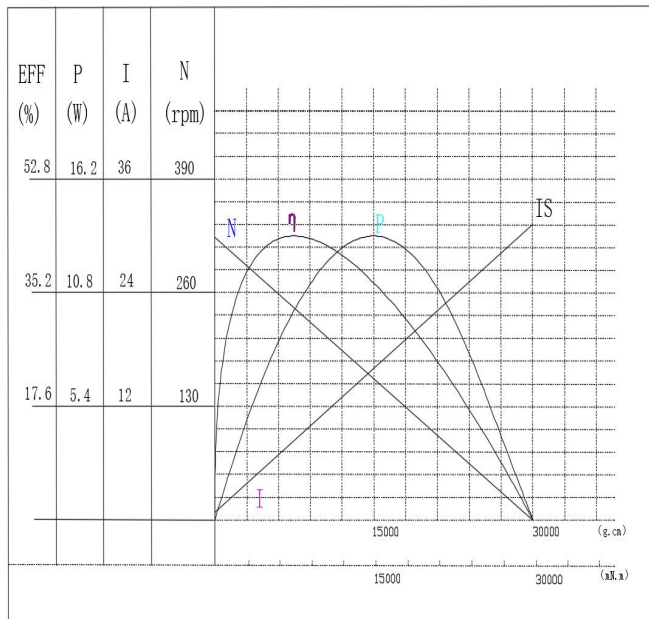

➤ 电机外形图 MOTOR OUTLINE DRAWING

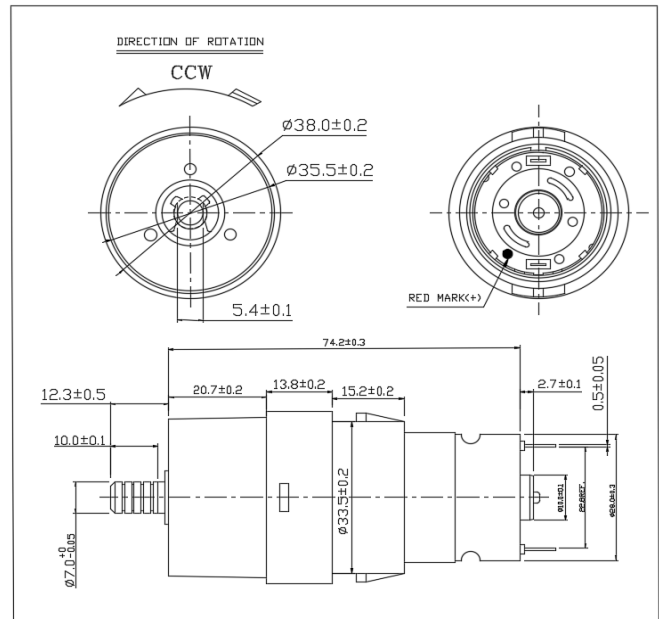

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIREMENTS

➤ 减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 — 减速比 MOTEL REDUCTION RATIO		4536-45	6017-45	
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	6.0~9.0	2.0~4.5	
	额定电压 RATED VOLTAGE (V)	7.4	3.7	
空载 UNLOADED	电流CURRENT (A)	0.75	1.5	
	转速SPEED (rpm)	320	370	
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	13.5	15.4	
	效率EFFICIENCY (%)	44.0	43.9	
堵转 STALL	电流CURRENT (A)	31.2	55.2	
	转矩TORQUE (g.cm)	30000	31000	

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE,

LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUILDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE,

QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA



深圳市宏盛威电机有限公司

SHENZHEN CITY HONGSHENGWEI MOTOR CO., LTD

惠州市宏盛威电机有限公司

HUIZHOU CITY HONGSHENGWEI MOTOR CO., LTD

——典型应用 TYPICAL APPLICATIONS


- 电动清洁刷 ELECTRIC CLEANING BRUSH
- 家用电器 HOUSEHOLD APPLIANCES
- 电动搅拌机 ELECTRIC MIXER
- 工业设备 INDUSTRIAL EQUIPMENT
- 按摩器 MASSAGER

直流减速电机 DC DECELERATION MOTOR


36GP-390



➤ 电机曲线图 MOTOR CURVE DIAGRAM

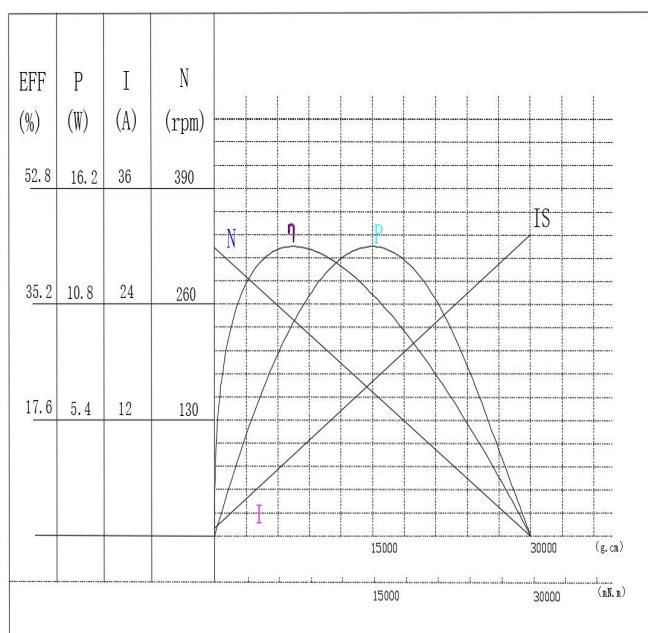

➤ 电机外形图 MOTOR OUTLINE DRAWING

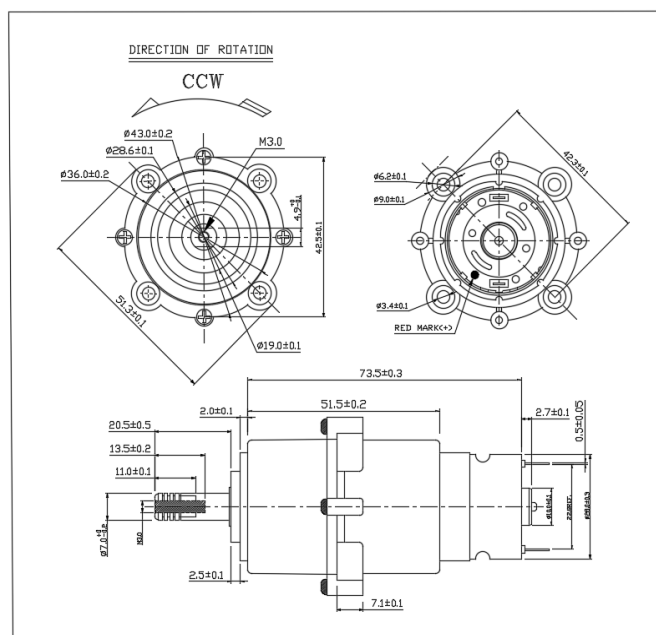

电压、扭矩、电流、功率、输出轴尺寸可以根据客户要求定制

VOLTAGE, TORQUE, CURRENT, POWER, AND OUTPUT SHAFT SIZE CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIREMENTS

➤ 减速电机性能参数 PERFORMANCE PARAMETERS OF DECELERATION MOTOR

型号 — 减速比 MOTEL REDUCTION RATIO		4536-45	6017-45	
电压 VOLTAGE	工作电压范围 OPERATING VOLTAGE RANGE (V)	6.0~9.0	2.0~4.5	
	额定电压 RATED VOLTAGE (V)	7.4	3.7	
空载 UNLOADED	电流CURRENT (A)	0.75	1.5	
	转速SPEED (rpm)	320	370	
在最高效率下 AT THE HIGHEST EFFICIENCY	输出功率OUTPUT POWER (W)	13.5	15.4	
	效率EFFICIENCY (%)	44.0	50.0	
堵转 STALL	电流CURRENT (A)	31.2	55.2	
	转矩TORQUE (g.cm)	30000	31000	

地址ADDRESS: 深圳市坪山区龙田街道莹展工业区B2B栋 5楼 THE 5TH FLOOR, BUILDING B2B, YINGZHANG INDUSTRIAL ZONE, LONGTIAN STREET, PINGSHAN DISTRICT, SHENZHEN CITY, GONGDONG PROV, CHINA

惠州市惠阳区秋长镇新塘村益泓荣工业区A栋 BUILDING A, YIHONGRONG INDUSTRIAL ZONE, XINTANG VILLAGE, QIUCHANG TOWN, HUIYANG DISTRICT, HUIZHOU CITY, GUANGDONG PROV, CHINA