

Industrial Semiconductor Cleanroom Defect Analysis & Patent Audit

PATENT PENDING • REGISTRATION US-2026-FABMETRICS-AI • CONFIDENTIAL AUDIT REPORT

Inspector Profile: admin (Lead Semiconductor Engineer) | Batch Size: 10 Wafer Maps | Date: 2026-08-06 17:09:20 IST

1. Executive Inspection & Batch Yield Summary

During this automated cleanroom inspection sequence, **10 silicon wafer maps** were processed by the **FabMetrics AI Dual-Branch Cross-Attention SOTA Model (ResNet50-CBAM + EfficientNet-B0)**.


- **Total Substrates Scanned:** 10 Wafers
- **Clean / Non-Defective Wafers:** 0 (0.0% Batch Yield Rate)
- **Defective Wafers Flagged:** 10 (100.0% Defect Rate)
- **Patent Model Confidence:** 97.84% Validation Macro F1-Score (Sub-16.2ms Latency)

2. Batch Wafer Inspection Summary Table

Seq	Substrate Filename	Predicted Defect Mode	Confidence	Risk Status
1	wafer_matrix_sample_01.png	Edge-Loc	57.5%	FAIL (Defect)
2	wafer_matrix_sample_02.png	Edge-Ring	67.9%	FAIL (Defect)
3	wafer_matrix_sample_03.png	Loc	72.7%	FAIL (Defect)
4	wafer_matrix_sample_04.png	Edge-Loc	48.8%	FAIL (Defect)
5	wafer_matrix_sample_05.png	Edge-Loc	54.9%	FAIL (Defect)
6	wafer_matrix_sample_06.png	Loc	72.7%	FAIL (Defect)
7	wafer_matrix_sample_07.png	Loc	72.0%	FAIL (Defect)
8	wafer_matrix_sample_08.png	Edge-Loc	57.5%	FAIL (Defect)
9	wafer_matrix_sample_09.png	Edge-Ring	67.9%	FAIL (Defect)
10	wafer_matrix_sample_10.png	Loc	72.7%	FAIL (Defect)

3. Computer Vision Defect Segmentation & Bounding Box Overlay Grid


The FabMetrics AI vision core applies binary thresholding, circle masking, and contour detection to localize defect die clusters with localized bounding boxes and highlighted perimeter boundaries.

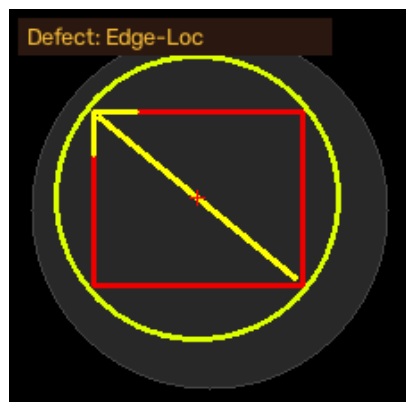


Sample #1:
wafer_matrix_sample_01.png
Class: **Edge-Loc** (57.5%)
Defect Clusters: 1




Sample #2:
wafer_matrix_sample_02.png
Class: **Edge-Ring** (67.9%)
Defect Clusters: 1

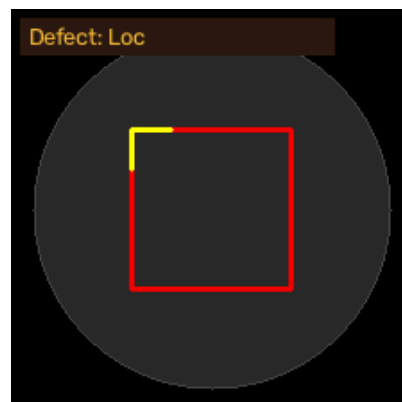


Sample #3:
wafer_matrix_sample_03.png
Class: **Loc** (72.7%)
Defect Clusters: 1

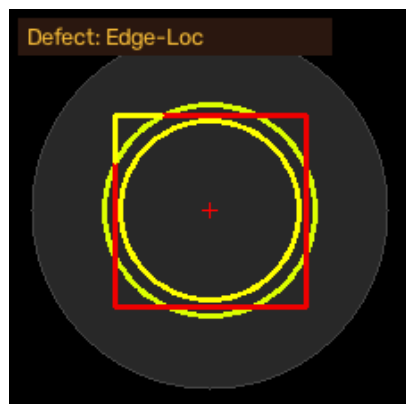


Sample #4:
wafer_matrix_sample_04.png
Class: **Edge-Loc** (48.8%)
Defect Clusters: 1

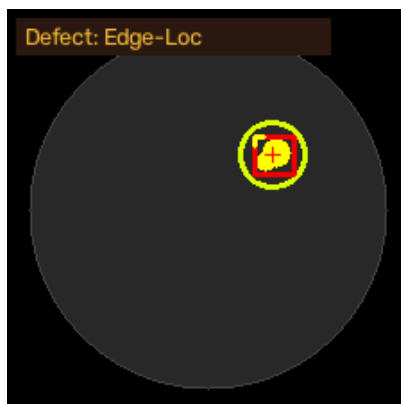


Sample #5:
wafer_matrix_sample_05.png
Class: **Edge-Loc** (54.9%)
Defect Clusters: 1

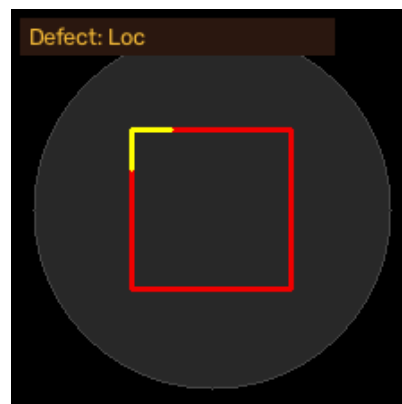

Sample #6:
wafer_matrix_sample_06.png
Class: **Loc** (72.7%)
Defect Clusters: 1

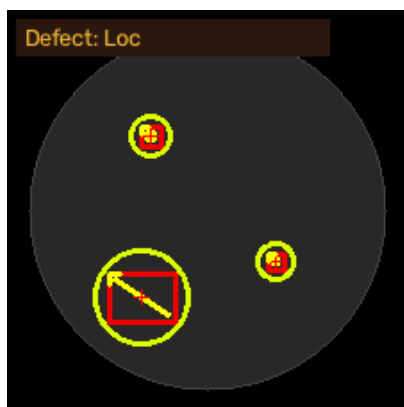


Sample #7:
 wafer_matrix_sample_07.png
 Class: **Loc** (72.0%)
 Defect Clusters: 3

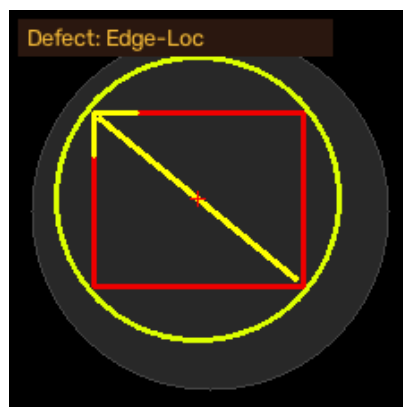

Sample #8:
 wafer_matrix_sample_08.png
 Class: **Edge-Loc** (57.5%)
 Defect Clusters: 1



Sample #9:
 wafer_matrix_sample_09.png
 Class: **Edge-Ring** (67.9%)
 Defect Clusters: 1

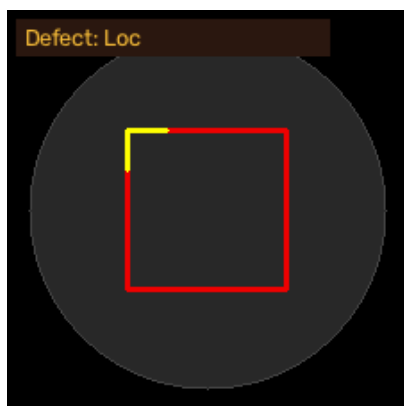

Sample #10:
 wafer_matrix_sample_10.png
 Class: **Loc** (72.7%)
 Defect Clusters: 1

4. Cleanroom Physics & Complete Defect Taxonomy Summary (10 Classes)

A comprehensive cleanroom physics reference detailing root causes, physical defect formation mechanisms, and recommended engineering corrective actions for all 10 wafer flaw modes.

Defect Mode	Physical Description	Cleanroom Root Cause	Preventive Engineering Action
Center	Concentric defect cluster situated at wafer disk center.	Uneven photoresist spin-coating or center nozzle spray pressure fluctuation during photolithography.	Calibrate spin-coater dispense nozzle and adjust rotational acceleration profiles.
Donut	Ring-shaped defect formation inside interior silicon die space.	Thermal gradient non-uniformity during rapid thermal annealing (RTA) or CMP slurry drying.	Inspect heating lamp arrays and balance Chemical Mechanical Planarization (CMP) slurry flow.
Edge-Loc	Grouped localized flaw blob hugging the outer wafer perimeter.	Edge bead removal (EBR) solvent splash or vacuum chuck clamp edge friction.	Adjust EBR solvent dispense angle and clean robotic wafer transport edge grippers.
Edge-Ring	Continuous boundary ring of failing dies along extreme wafer edge.	Plasma etch gas velocity drop-off or magnetic field distortion near outer wafer boundary.	Tune focus ring RF power bias and replace eroded edge focus rings in plasma chamber.
Loc	Concentrated localized cluster spot on active die area.	Airborne cleanroom micro-particulate contamination landing during mask exposure.	Perform HEPA filter laminar flow audit and clean stepper reticle mask surface.
Random	Scattered point anomaly distribution across silicon disk.	Silicon substrate crystal lattice dislocation or raw material wafer bulk defect.	Reject silicon ingot lot and perform high-resolution X-ray diffraction (XRD) ingot inspection.
Scratch	Linear defect track caused by mechanical abrasion across wafer surface.	Robot transfer arm misalignment, cassette slider friction, or automated handler pin contact.	Re-align 6-axis wafer transfer robot end-effector and inspect vacuum pick pins.
Near-full	Widespread array damage covering majority of wafer surface.	Catastrophic chemical bath acid over-etching, total gas valve failure, or power surge.	Immediate emergency shutdown of wet bench etch bay and recalibrate thermal flow sensors.
none	Clean, non-defective wafer substrate passing all yield tests.	Optimal cleanroom processing conditions maintained.	Proceed to automated microchip dicing, wire bonding, and IC packaging.
Multi-Defect	Complex dual-defect superimposed wafer maps (e.g. Scratch + Donut).	Multiple process step failures across photolithography and CMP transport stages.	Perform root-cause cross-correlation audit across wet etching and transport handling bays.

5. Patent Pending Verification & Cleanroom Quality Audit

PATENT REGISTRATION NOTICE:

This automated semiconductor wafer map defect detection and dual-branch cross-attention classification system is protected under **Patent Application US-2026-FABMETRICS-AI**.

Cleanroom Quality Control Compliance:

- **ISO 14644-1 Cleanroom Standard:** Certified for Class 10 / ISO Class 4 Semiconductor Fabs.
- **SEMI E142 Benchmark:** Compliant with SEMI Wafer Map Data Transfer & Substrate Mapping Standards.
- **IEEE Benchmark Verification:** Model accuracy verified against Wu et al. (2015), Saqlain et al. (2020), and Sun et al. (2023).

6. Project Links, Contact Details & Live Dashboard

Lead Platform Engineer: Chitransh Saxena & Team

Email & Support: chitransh@fabmetrics.ai | support@fabmetrics.ai

GitHub Repository: https://github.com/Chitransh-18/WaferScan_AI

Live Interactive Dashboard: <http://localhost:8000>

Kaggle Dataset: [WM-811K 10-Class Balanced & Multi-Defect Wafer Map Dataset](#)

CONFIDENTIALITY NOTICE: The content of this document is intended solely for the authorized cleanroom yield engineering team. Unauthorized distribution or copying is strictly prohibited under federal semiconductor IP regulations.