

Appendix 14: Saving Received Messages As Files and Sending Them Again

Instruction Manual

Instruction Manual Version: V2.04

Update Date: 2023.07.01

During CAN debugging, it is often necessary to receive and save data from the CAN bus to a computer. Occasionally, it may be necessary to simulate sending by sending a saved file to the bus or modifying part of the file before sending. It is important to ensure that the time interval between frames matches the received message.

The following is a detailed description of this function using CANPro software from Chou Li-Gong.

1. Chou Li-gong CANPro software file saving and sending function

To use CANPro1.50, simply replace ControlCAN.dll and other library files (refer to: How to Compatible Use Zhou Ligong CANpro1.50 Software.pdf) and select the USBCAN-2E-U model.

CANpro1.50 is more feature-rich, so here is an example of CANpro1.50.

To start the CAN interface card, open the CANpro1.50 software and select the USBCAN-2E-U interface card. Then, select the appropriate baud rate for the bus (typically 500K for automotive CAN bus) and click OK. Refer to Figure 1 for further guidance.


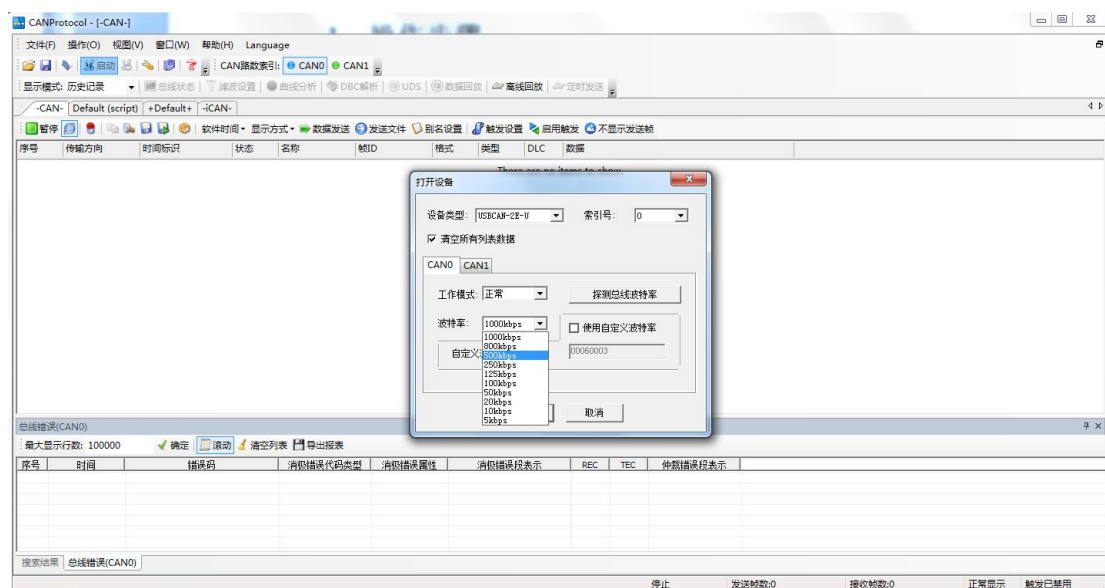


Fig. 1 Opening CANpro software initialisation


Data saving:

Before connecting the digital bus data, click the "Real-time save" button in the menu shortcut operation to enter the corresponding interface, as shown in the figure:

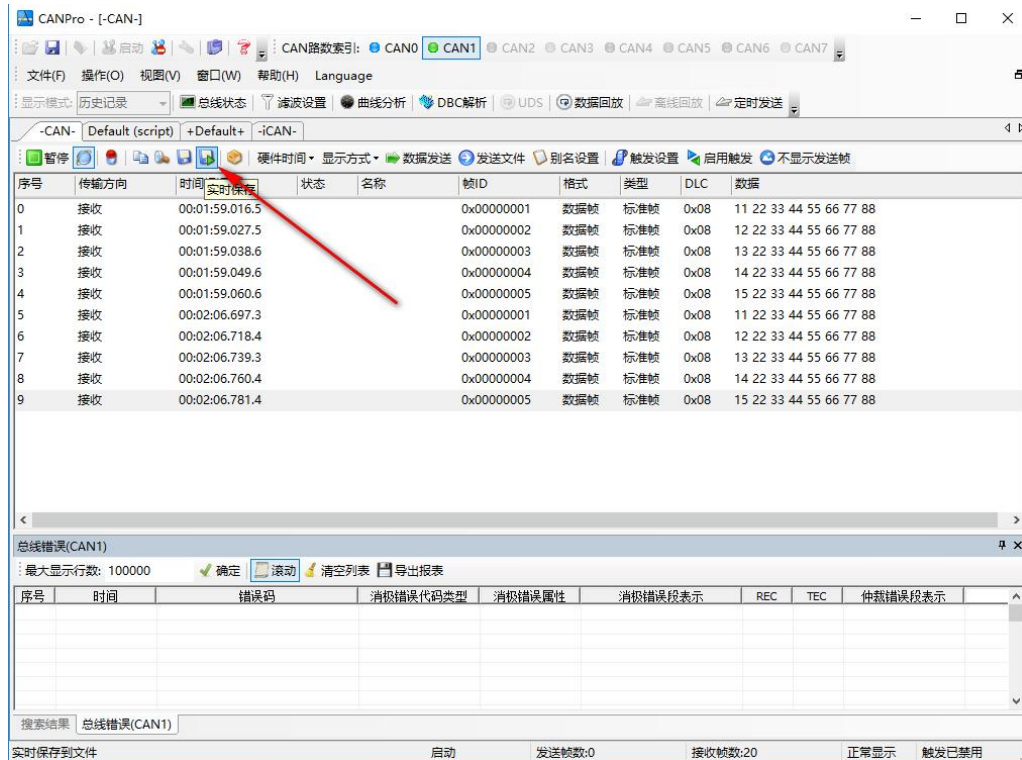

In the pop-up interface, select the file save path, take a file name, and select "*.can" as the save type.

Note: *.can is an internal format of CANpro, it can only be loaded and displayed by CANpro, external software cannot view the content.

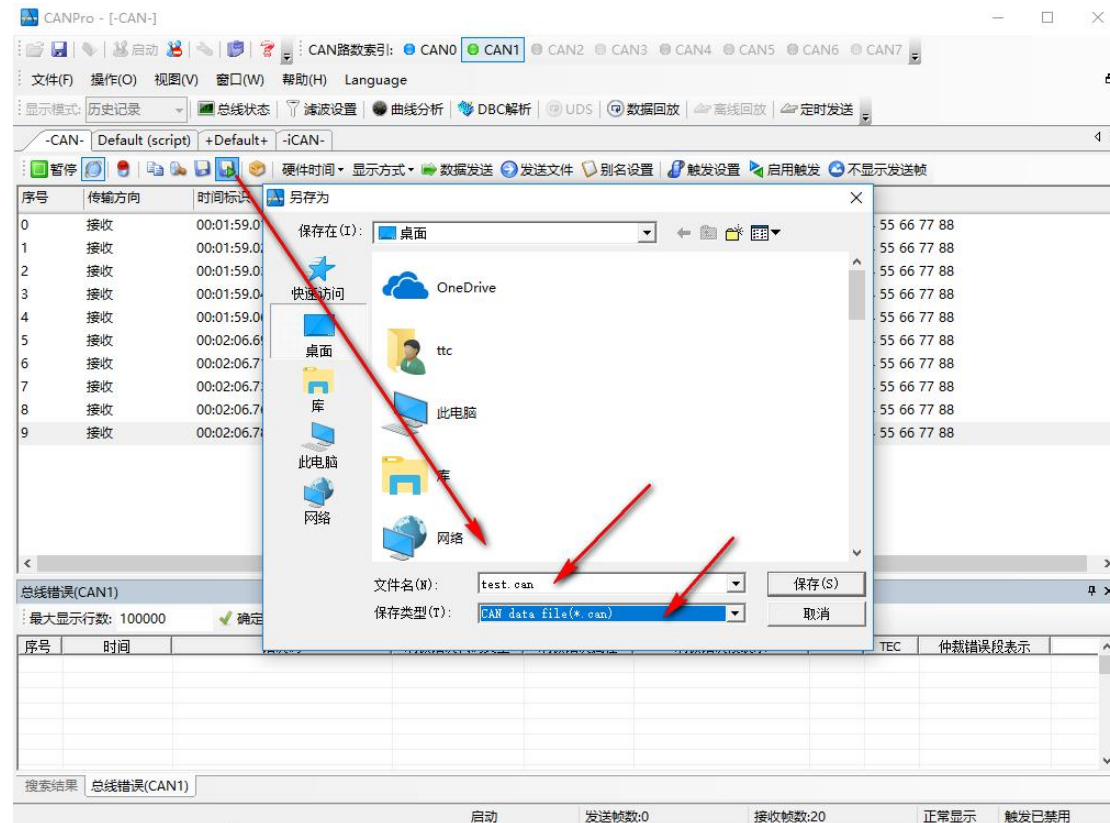


After clicking on the "Save" button, a *.CAN file is created in the selected path. Now start receiving the data from the bus, which will be automatically saved to the file.


Send data:

Click the "Send Data" button in the menu shortcut to enter the corresponding interface, as shown in the figure:


Select "Load from file".

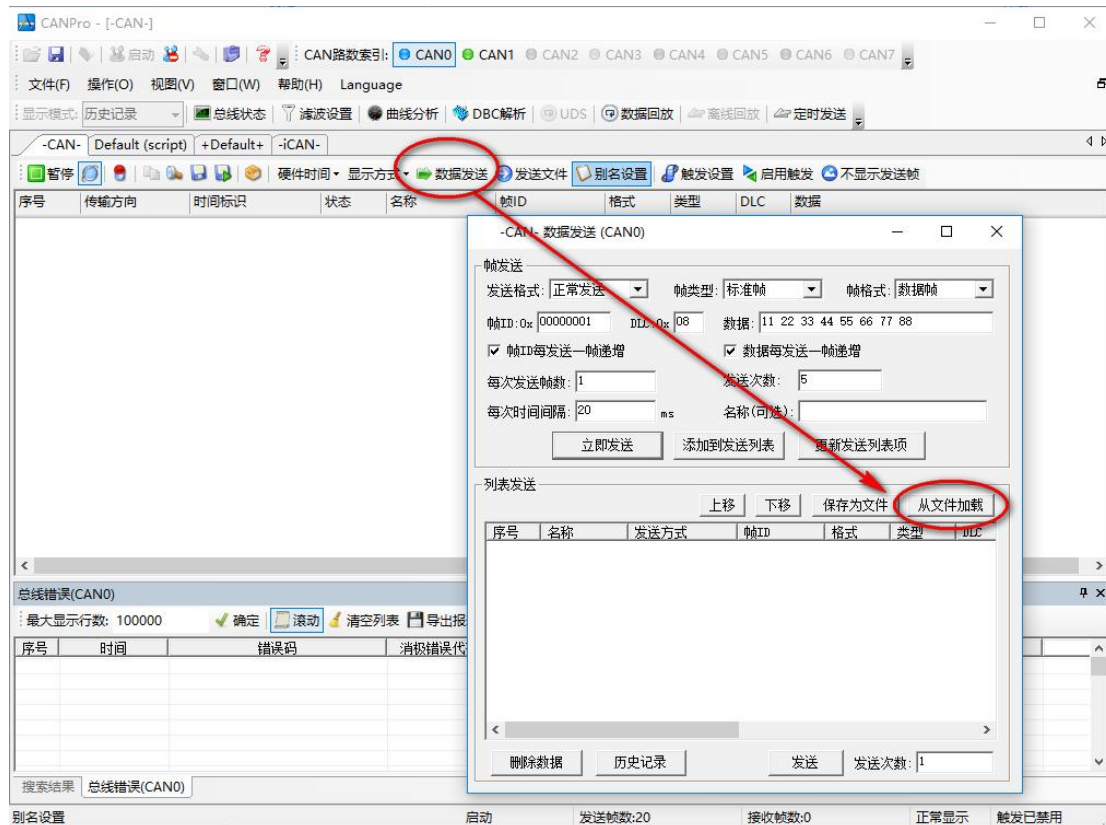


Locate the path where you just saved the file, select "*.can" as the save type, find the file you just saved and open it.

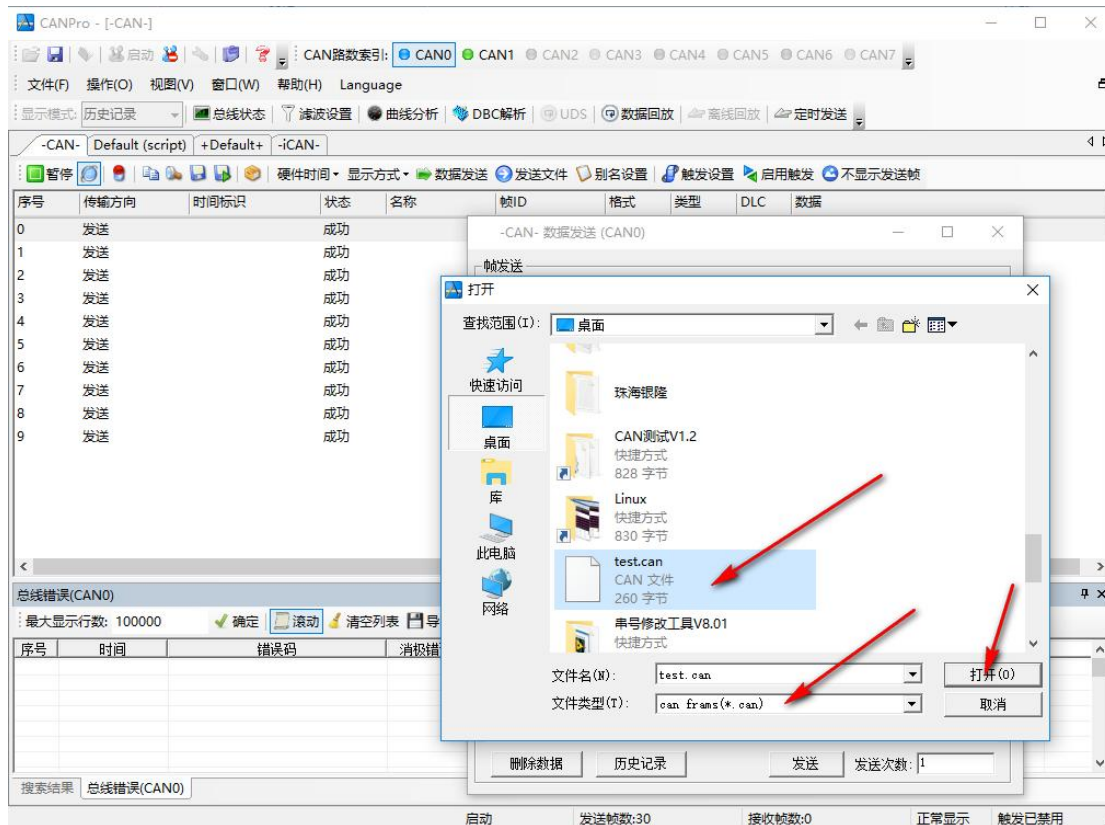

At this point, the CAN file is loaded into the transmit list and the frame interval is also loaded correctly.

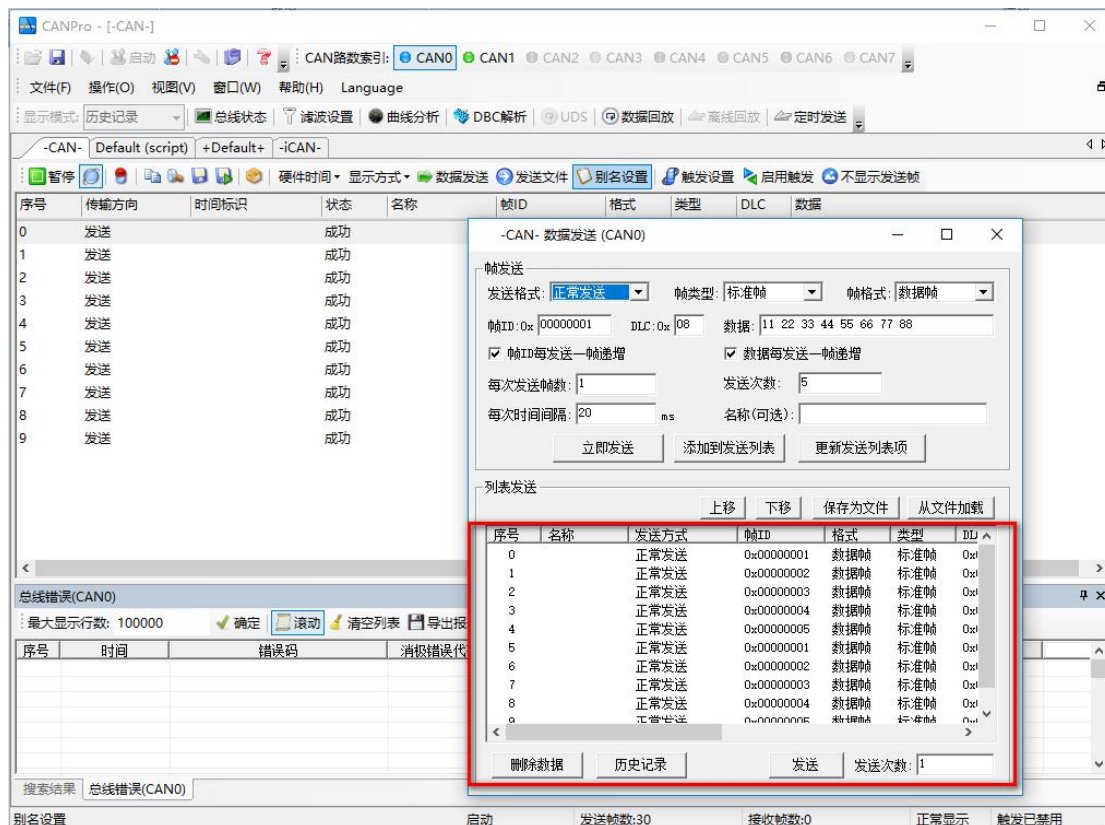


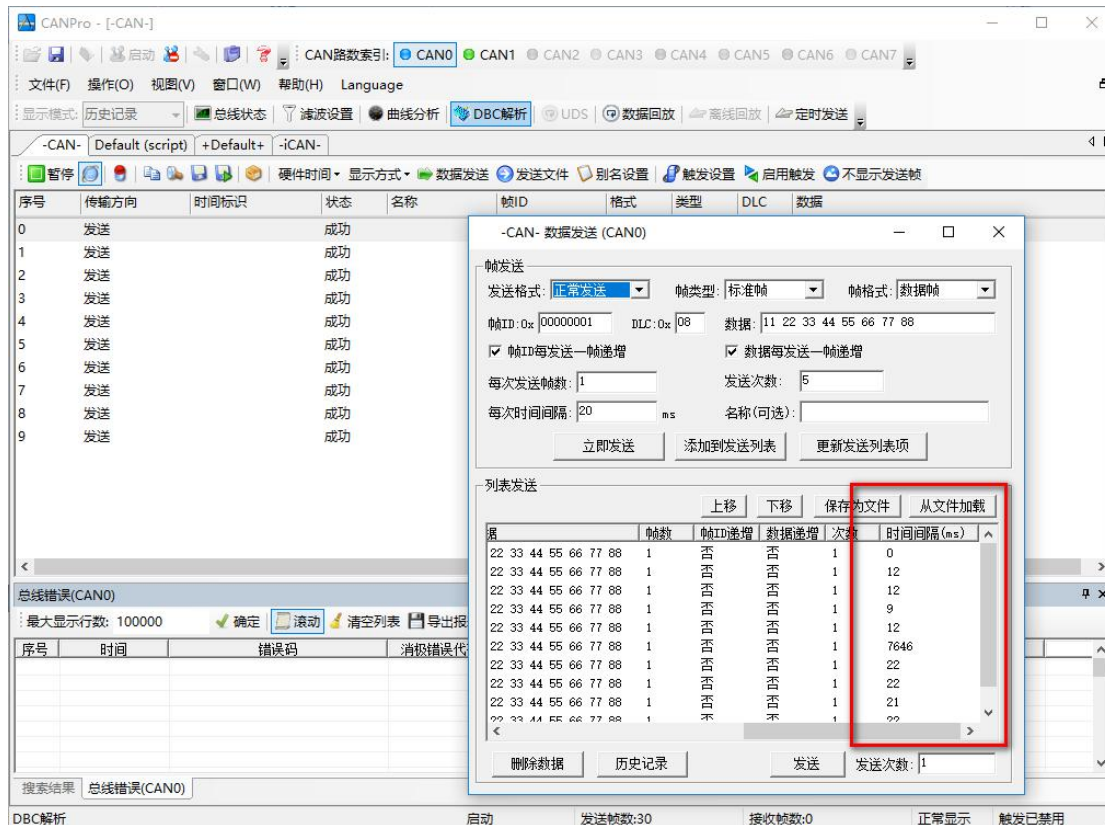

Number of times to send: Fill in how many times you want to send the file. Then click Send. The software will then send the file content, at time intervals, to the bus.

Modification of the file content:

Double click the corresponding frame data in the send list, this frame data will be loaded into the upper edit box, in the edit box, you can modify the corresponding frame, after modification, click update, this frame will be modified.

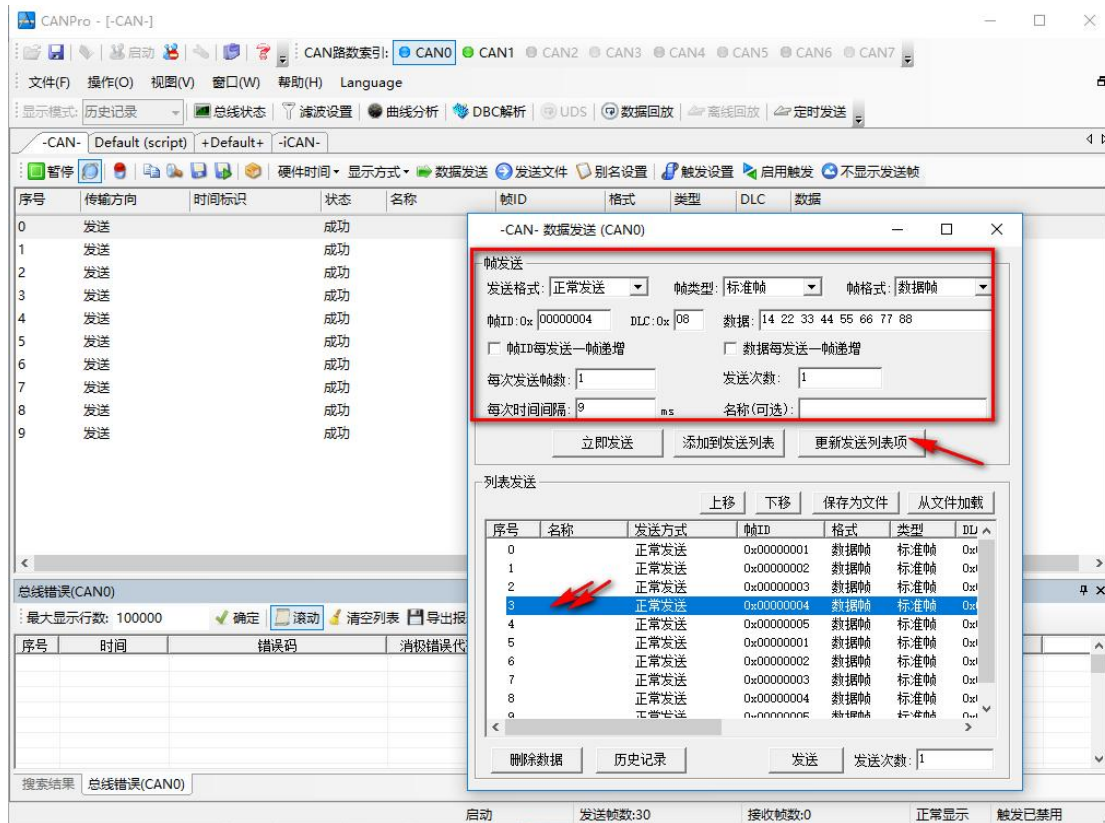

2、Application Scope

- Industrial Control Test
- Automotive Electronics Maintenance and Repair
- Protocol Cracking