PANS-OPS
INSTRUMENT APPROACH CHART

AD ELEV 39


TACAN RWY 26
HOHN (ETNH)

HOHN TWR	HOHN RADAR	BREMEN RADAR
336.375 141.700 123.710	240.725 141.100 128.380	299.100 124.075

NAVAID	APP COURSE	FAF ALT	DESCENT GR	MDA	THR ELEV	ALS-LENGTH	LDA
HNT CH100X	255°	2000	5.24%	**See CAT**	38	900 M	8004


NOTE:
a) DME REQUIRED.
ⓑ NO TURN BEFORE MAPT.

IAF NH500
54°06.45'N
009°24.77'E

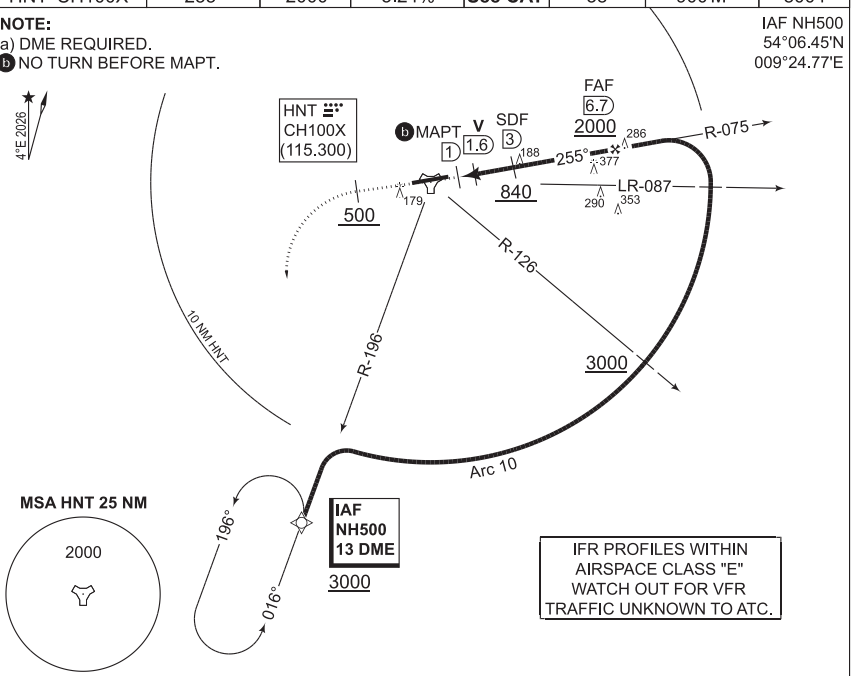

EMERG SAFE ALT 100 NM 2500

MISSED APPROACH
Climb on RWY heading to 3000 ft.
When passing 500 ft turn left and intercept HNT R-196 outbound to IAF.

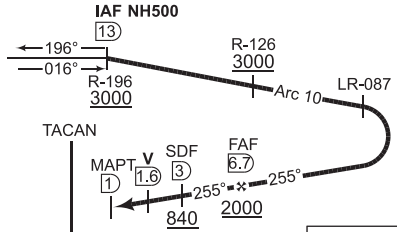

HNT	2	3	4	5	6	6.7
Altitude	520	840	1160	1470	1780	2000

CATEGORY	A	B	C	D	E
MIPS TACAN 26	**400** - 1.0 362 (400-1.0/1.5)		**400** - 1.0 362 (400-1.0/1.7)		
MIPS PAR 26	**238** - 0.8 550 200 (200-0.8/1.2)				

CHANGE: PAR MINIMA (126/26)

ACC 11 JUN 2026

TACAN RWY 26

54°18.73'N
009°32.29'E

HOHN (ETNH)