PANS-OPS
INSTRUMENT APPROACH CHART


AD ELEV 26

RNP RWY 25
WITTMUNDHAFEN (ETNT)


BREMEN RADAR	WITTMUND RADAR	WITTMUND TOWER
240.600 124.800	298.250 131.015	247.950 118.730 122.100

APP COURSE	FAF ALT	GS	DA / MDA	THR ELEV	ALS-LENGTH	LDA
255°	2000	3° / 5.2%	**See CAT**	18	900 m	8005

NOTE:
a) GNSS REQUIRED
b) BARO-VNAV NOT AUTHORIZED BELOW -30°C.
C CIRCLING NOT AUTHORIZED SOUTH OF RWY 07/25.

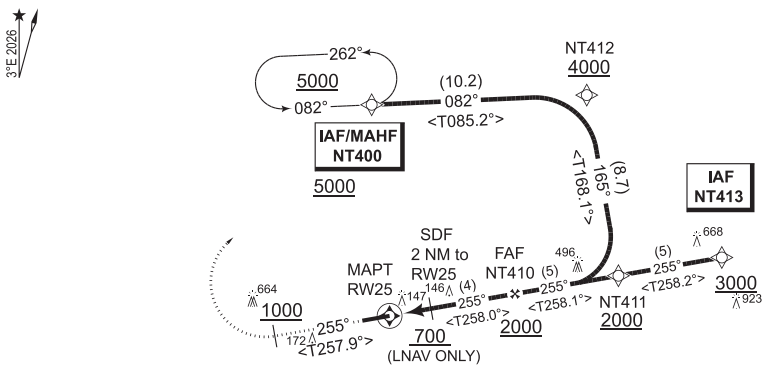

MSA ARP 25 NM




IFR PROFILES WITHIN
AIRSPACE CLASS "E"
WATCH OUT FOR VFR
TRAFFIC UNKNOWN TO ATC.

EMERG SAFE ALT 100 NM 2700

MISSED APPROACH **TA 5000**

Climb on track 255° to altitude 5000 ft.
When passing 1000 ft turn right direct NT400.
[M255, A1000;R]→ NT400 [A5000+]

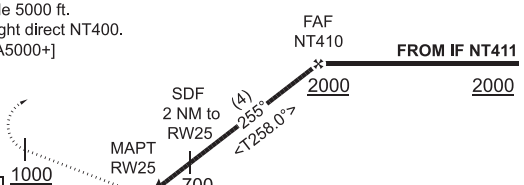

Dist THR	2	3	4	5	6
Altitude	710	1020	1340	1660	2000

THR ELEV 18 — 6.0

TCH 50

CAT I

CATEGORY	A	B	C	D	HPMA
LNAV	**400** - 1.1 382 (400-1.1/1.5)		**400** - 1.1 382 (400-1.1/1.8)		**NOT AUTHORIZED**
LNAV/VNAV	**277** - 0.8/600 259 (300-0.8/1.3)	**289** - 0.8/600 271 (300-0.8/1.3)	**297** - 0.8/600 279 (300-0.8/1.3)	**308** - 0.8/650 290 (300-0.8/1.4)	**NOT AUTHORIZED**
C CIRCLING	**490** - 2.2 464 (500-2.2)	**560** - 2.4 534 (600-2.4)	**1020** - 4.5 994 (1000-4.5)	**1060** - 4.9 1034 (1100-4.9)	**580** - 3.2 554 (600-3.2)

MIPS

CHANGE: CIRCLING (154/26)

ACC 06 AUG 2026

RNP RWY 25

53°32.87'N
007°40.04'E

WITTMUNDHAFEN (ETNT)