**PANS-OPS**
**INSTRUMENT APPROACH CHART**

AD ELEV 187

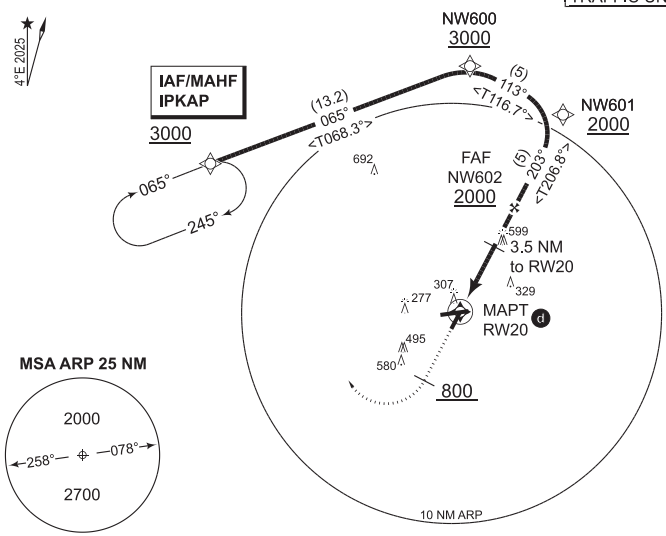
**RNP RWY 20**
**WUNSTORF (ETNW)**

| BREMEN RADAR | WUNSTORF RADAR | WUNSTORF TOWER |
|---|---|---|
| 259.725 119.490 | 389.400 124.655 123.300 | 356.100 132.055 |

| APP COURSE | FAF ALT | DESCENT GR | MDA | THR ELEV | ALS-LENGTH | LDA |
|---|---|---|---|---|---|---|
| 203° | 2000 | 3.0° / 5.2% | **See CAT** | 169 | 422 m | 5573 |

**NOTE:**
a) NAVIGATION SENSOR: GNSS ONLY.
b) NAVIGATION SPECIFICATION:
RNAV 1 UNTIL NW601, RNP APCH THEREAFTER.
c BARO-VNAV NOT AUTHORIZED BELOW -30°C.
d NO TURN BEFORE MAPT.

IFR PROFILES WITHIN AIRSPACE CLASS "E" WATCH OUT FOR VFR TRAFFIC UNKNOWN TO ATC.



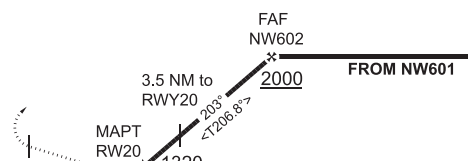

**MSA ARP 25 NM**




**EMERG SAFE ALT 100 NM 6100**

**MISSED APPROACH** **TA 5000**

Climb on track 203° at or above 800 ft, turn right direct to IPKAP, climb to 3000 ft.
[M203 A800+;R]→IPKAP [A3000+]




| Distance THR | 1 | 2 | 3 | 4 | 5 |
|---|---|---|---|---|---|
| Altitude | 540 | 850 | 1170 | 1490 | 1800 |

THR ELEV 169 — 5.59 — TCH 50 — S-ALS

| MIPS | CATEGORY | A | B | C | D |
|---|---|---|---|---|---|
| | LNAV | **560** - 1.4 391 (400-1.4/1.5) | | **560** - 1.4 391 (400-1.4/1.8) | |
| | LNAV/VNAV c | **436** - 0.9 267 (300-0.9/1.3) | **449** - 0.9 280 (300-0.9/1.3) | **457** - 0.9 288 (300-0.9/1.4) | **467** - 0.9 298 (300-0.9/1.4) |
| | CIRCLING | **680** - 2.3 493 (500-2.3) | **790** - 2.8 603 (700-2.8) | **1000** - 3.8 813 (900-3.8) | **1160** - 4.5 973 (1000-4.5) |

CHANGE: REVISED CHART (163/25)

ACC 25 DEC 2025

**RNP RWY 20**

52°27.44'N
009°25.63'E

**WUNSTORF (ETNW)**