PANS-OPS
INSTRUMENT APPROACH CHART

AD ELEV 265


RNP RWY 27
HOLZDORF (ETSH)

BREMEN RADAR	HOLZDORF RADAR	HOLZDORF TOWER
398.575 126.425	254.925 397.500 123.300 129.855	267.400 130.505 122.100

APP COURSE	FAF ALT	DESCENT GR	DA / MDA	THR ELEV	ALS-LENGTH	LDA
269°	2000	3° / 5.2%	**See CAT**	263	900 M	7938

NOTE:
a) GNSS REQUIRED.
b) BARO VNAV NOT AUTHORIZED BELOW -30°C.
c CIRCLING CAT B NOT AUTHORIZED SOUTH OF RWY.
d MISSED APCH LIMITED TO 220 KIAS MAX.

EGNOS CHANNEL
75892 E27A

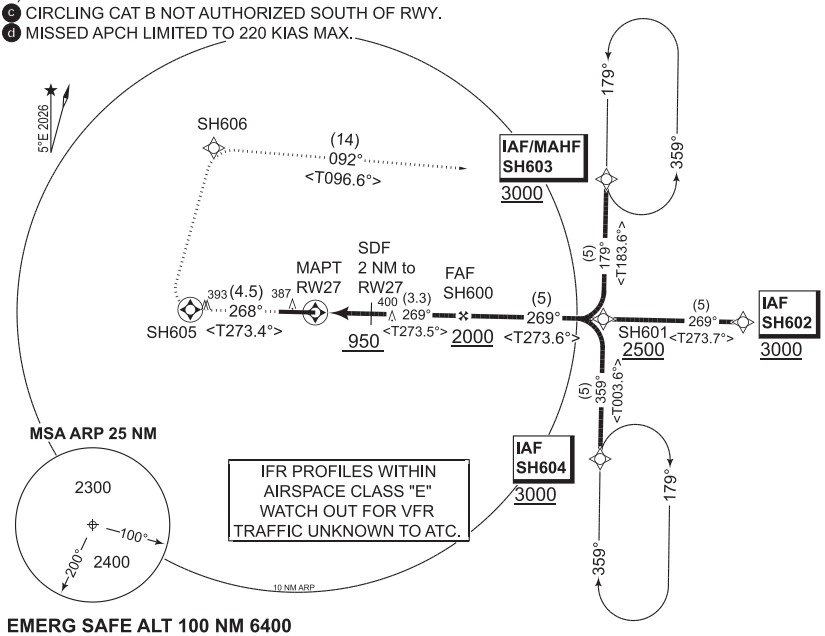


EMERG SAFE ALT 100 NM 6400

MISSED APPROACH f
Climb on course 268° to SH605,
turn right direct to SH606, to SH603, climb to 3000 ft.
SH605 [M268;R]→SH606; SH603[A3000+;K220-]

Dist THR / RW27	1	2	3	4	5	5.3
Altitude	630	950	1260	1580	1900	2000

TA 5000

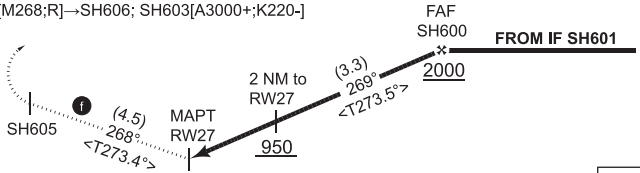

CATEGORY	A	B	C	D
LNAV	**620** - 0.9 357 (400-0.9/1.5)		**620** - 0.9 357 (400-0.9/1.6)	
LNAV/VNAV	**513** - 0.8 550 250 (300-0.8/1.3)		**521** - 0.8 600 258 (300-0.8/1.3)	**545** - 0.8 650 282 (300-0.8/1.4)
LPV	**463** - 0.8 550 200 (200-0.8/1.2)		**468** - 0.8 550 205 (300-0.8/1.2)	**478** - 0.8 550 215 (300-0.8/1.2)
c CIRCLING	**760** - 2.3 495 (500-2.3)		**NOT AUTHORIZED**	

MPS

CHANGE: MINIMA TABLE: EGNOS ADDED (151/26)

ACC 06 AUG 2026